

www.pfcstore.com - 763-425-7890 / 800-328-2350



Integrated:

Ball valves for outlet, calibration column and drainage

Auxiliary ports: pulsation dampener, washing port, transport/dilution water and secondary pumps

Adjustable back pressure valve

Adjustable pressure relief valve

Pressure gauge with isolator

Bleed valve

DICE DOSING MODULE DM SERIES. FLOODED SUCTION & SUCTION LIFT. MATERIAL PVDF. CONNECTIONS 1/2"

Contact us for the DS & DM IOM

Leadtime is usually 2 to 4 weeks




SKU: DIM2X-DDXX-XXXXXXXXZX
Stock: Out of stock contact us for lead time
Categories: [Dice Dosing Module](#)

Part Number DIM2X-DDXX-XXXXXXXXZX

GALLERY IMAGES

DICE™ DM



www.pfcestore.com - 763-425-7890 / 800-328-2350

www.pfcestore.com - 763-425-7890 / 800-328-2350


PRODUCT DESCRIPTION

Use the chart below to select the location of each connector

www.pfcestore.com - 763-425-7890 / 800-328-2350

DICE™ DM

FLOODED SUCTION

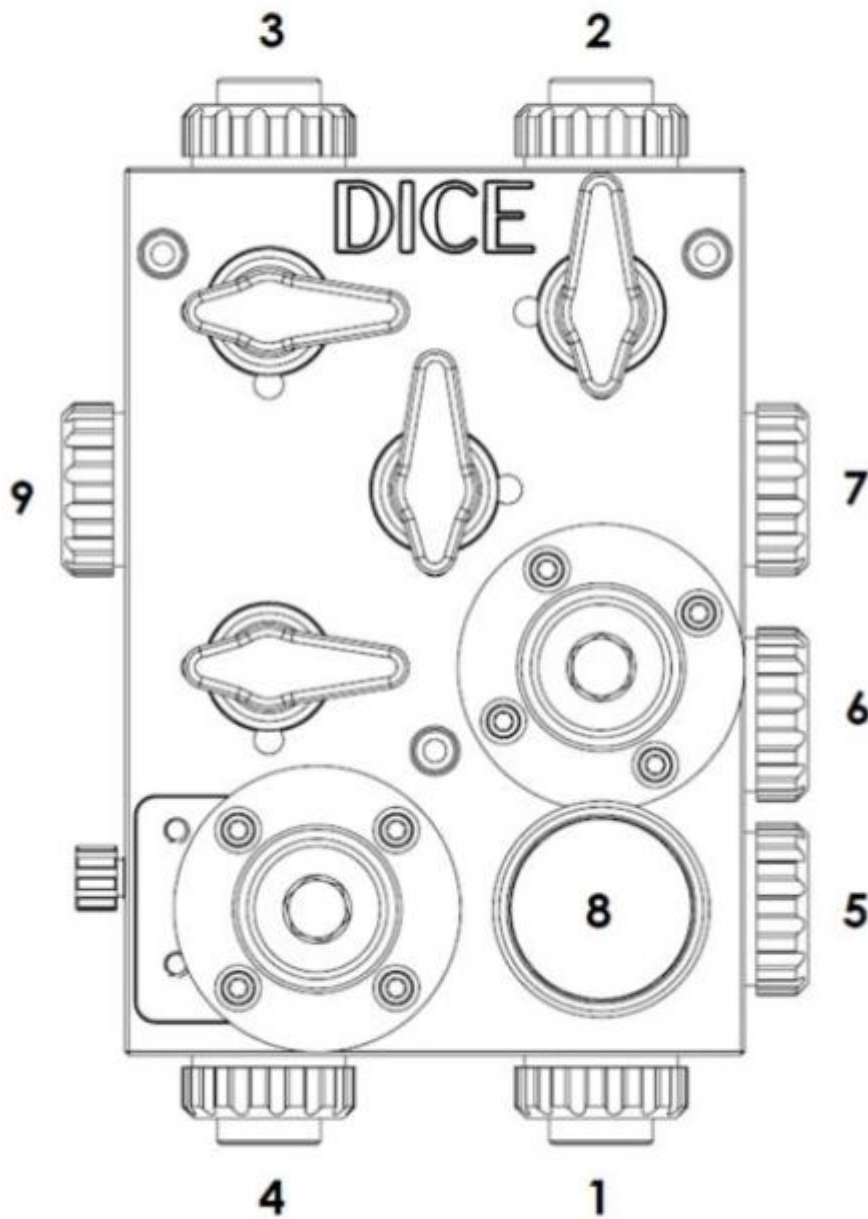

www.pfcstore.com - 763-425-7890 / 800-328-2350

Choices of connectors

Connectors

As per numbers in Model Number Nomenclature

Mushroom Nut Only  Connector code: 0	1/2" MNPT & Fits LMI Tubing Ferrule Adaptor  *LMI Ferrule Kit included; Refer to LMI tubing connection system information sheet Connector code: 1
FNPT  Connector code: 2	Socket for SCH 80 Rigid Piping  Connector code: 3

Choices of connectors

www.pfcestore.com - 763-425-7890 / 800-328-2350

www.pfcestore.com - 763-425-7890 / 800-328-2350


CAP  Connector code: 4	G5/8 & Fits Grundfos Tubing Ferrule Adaptor  <i>*Grundfos Ferrule Kit <u>not</u> included; sold separately</i> Connector code: 5
Socket for Metric Rigid Piping  Connector code: 6	Flare connector for PFA Tubing  <i>*Connection nut <u>not</u> included; sold separately</i> Connector code: 7
Isolator & Pressure Gauge  Connector code: Z	No Connector & No Mushroom Nut  Connector code: W

www.pfcstore.com - 763-425-7890 / 800-328-2350


INTRODUCING DICE™



Before

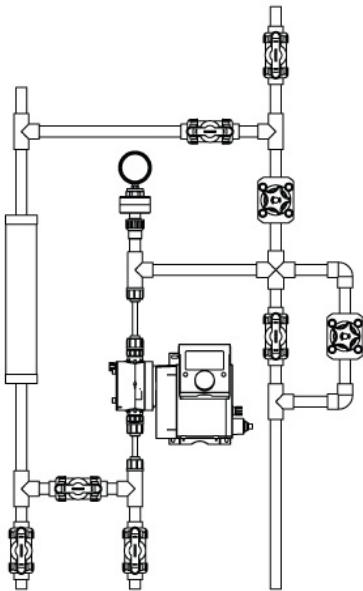


Now

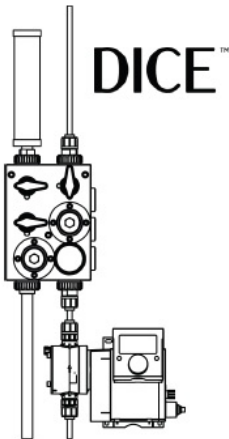


2x
Reduced
Footprint

www.pfcestore.com - 763-425-7890 / 800-328-2350

TYPICAL INSTALLATIONS

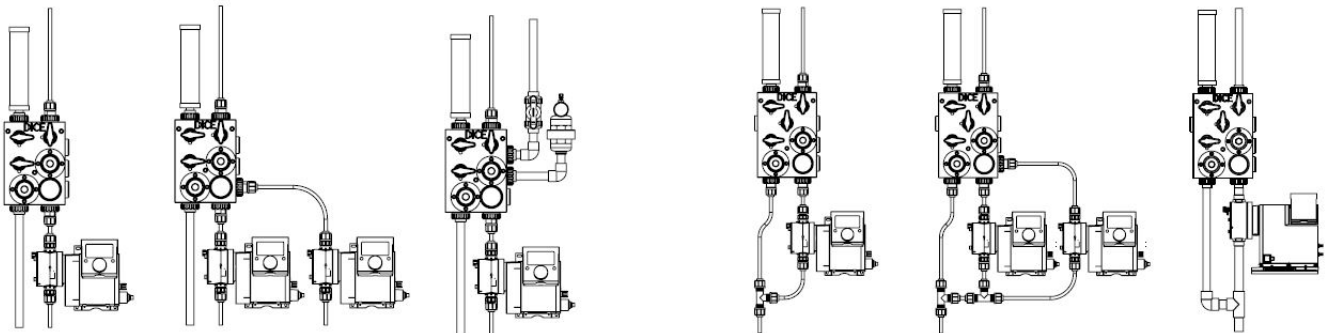


DIMENSIONS

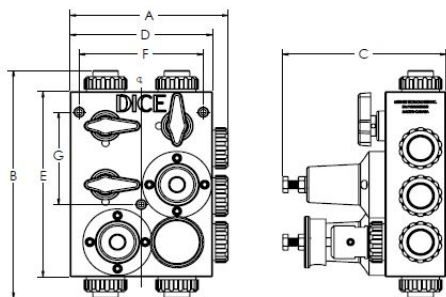


DIMENSIONS mm (in)								
Size		A	B	C	D	E	F	G
1/2"	DS	187,4 (7.38)	280,8 (11.05)	193,4 (7.61)	168,9 (6.65)	228,6 (9.00)	146,9 (5.78)	113,9 (4.48)
	DM	218,6 (8.61)	312,5 (12.30)	193,4 (7.61)	181,6 (7.15)	260,3 (10.25)	159,6 (6.28)	145,7 (5.73)
1"	DM	269,0 (10.59)	376,0 (14.80)	232,7 (9.16)	223,0 (8.78)	296,0 (11.65)	194,0 (7.64)	150,0 (5.90)

DICE™ DS SUCTION LIFT

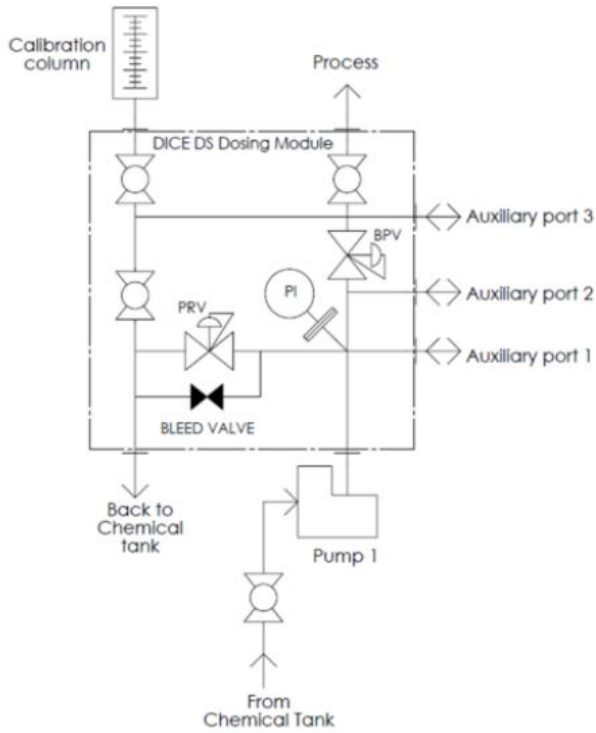

DICE™ DM FLOODED SUCTION

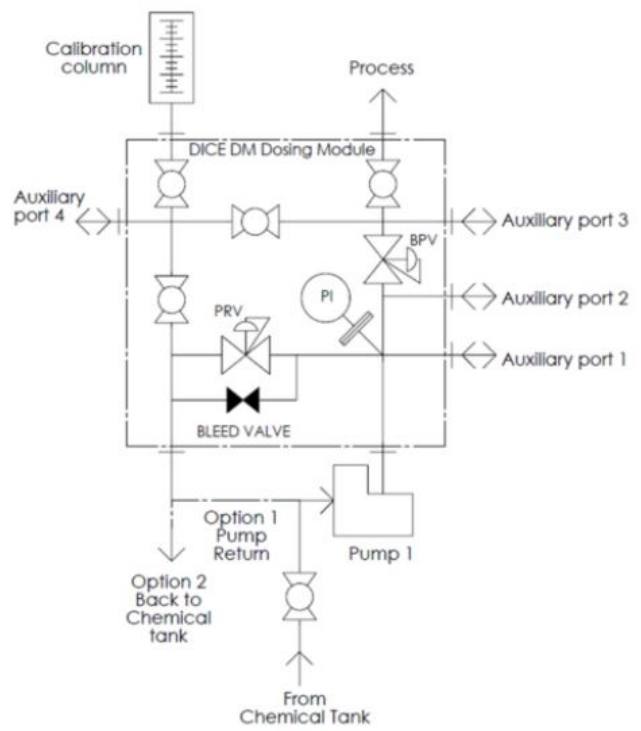

ADDITIONAL INFORMATION

Weight	30 lbs
Dimensions	14 × 14 × 16 in