


www.pfcstore.com - 763-425-7890 / 800-328-2350



## GOULDS 02SH06 E-SH PUMP 316SS WITH VITON

316SS | VITON MECH SEAL | 7.5HP  
TEFC PRE EFF, 3500RPM,  
3/60/230-460 VOLTS | 2 x 2.5-6 |  
150LB FLANGES | BEP 214 GPM @  
67 FTH

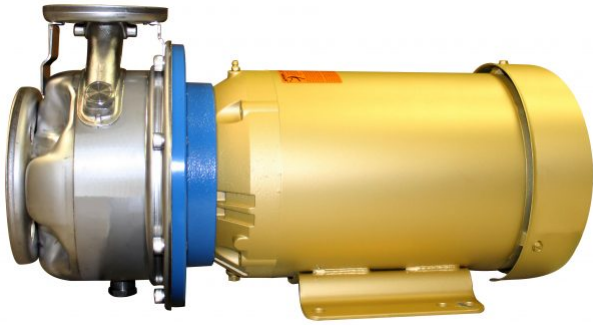

**SKU:** 02SH06F7HT3F2

**Stock:** Out of stock contact us for  
lead time

**Categories:** [Goulds e-SH Pumps](#)

**Tags:** [GOULDS e-SH PUMPS](#)

**Part Number** 02SH06F7HT3F2

## PRODUCT DESCRIPTION

Goulds e-SH Pump 316SS are Superior Materials of Construction: AISI Type 316L stainless steel pump parts for reduced corrosion and improved strength and ductility.

Back Pull-Out Design: Simplifies maintenance when used with spacer type coupling.

Mechanical Seal: Standard John Crane Type 21 mechanical seal.

Suction and Discharge Flanges: Mate with ANSI class 150 flanges.

Close-Coupled Design: Compact design saves space and simplifies maintenance

www.pfcestore.com - 763-425-7890 / 800-328-2350

Enclosed impeller

Estimated delivery is 3 to 4 weeks

Contact us for actual lead time

Product photo could vary from the actual product

[Curve](#)

[Brochure Specs](#)

ADDITIONAL INFORMATION

|                       |                                  |
|-----------------------|----------------------------------|
| Weight                | 199 lbs                          |
| Dimensions            | 36 × 22 × 22 in                  |
| Best Efficiency Point | <a href="#">214 GPM @ 67 FTH</a> |
| Wetted Material       | <a href="#">316SS-VITON</a>      |
| Connections           | <a href="#">2 X 2.5</a>          |
| Hertz                 | <a href="#">60</a>               |
| Horse Power           | <a href="#">7.5</a>              |
| Motor Type            | <a href="#">TEFC</a>             |
| Phase                 | <a href="#">3</a>                |
| RPM                   | <a href="#">3500</a>             |
| Voltage               | <a href="#">230-460</a>          |