


www.pfcstore.com - 763-425-7890 / 800-328-2350



GOULDS 02SH08 E-SH PUMP 316SS WITH VITON

316SS | VITON MECH SEAL | 25HP
TEFC PRE EFF, 3500RPM,
3/60/230-460 VOLTS | 2 x 2.5-8 |
150LB FLANGES | BEP 288 GPM @
210 FTH

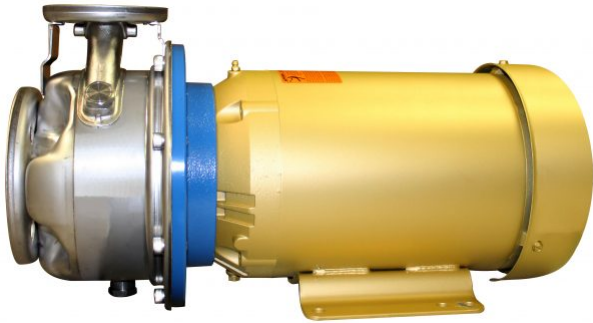

SKU: 02SH08A25T3F2

Stock: Out of stock contact us for
lead time

Categories: [Goulds e-SH Pumps](#)

Part Number 02SH08A25T3F2

PRODUCT DESCRIPTION

Goulds e-SH Pump 316SS are Superior Materials of Construction: AISI Type 316L stainless steel pump parts for reduced corrosion and improved strength and ductility.

Back Pull-Out Design: Simplifies maintenance when used with spacer type coupling.

Mechanical Seal: Standard John Crane Type 21 mechanical seal.

Suction and Discharge Flanges: Mate with ANSI class 150 flanges.

Close-Coupled Design: Compact design saves space and simplifies maintenance

www.pfcstore.com - 763-425-7890 / 800-328-2350

Enclosed impeller

Estimated delivery is 3 to 4 weeks

Contact us for actual lead time

Product photo could vary from the actual product

[Curve](#)

[Brochure Specs](#)

ADDITIONAL INFORMATION

Weight	354 lbs
Dimensions	36 × 22 × 22 in
Best Efficiency Point	289 GPM @ 209 FTH
Connections	2 X 2.5
Hertz	60
Horse Power	25
Motor Type	TEFC
Phase	3
RPM	3500
Voltage	230-460
Wetted Material	316SS-VITON

316SS | VITON MECH SEAL | 25HP TEFC PRE EFF, 3500RPM, 3/60/230-460

www.pfcestore.com - 763-425-7890 / 800-328-2350

VOLTS | 2 x 2.5-8 | 150LB FLANGES | BEP 288 GPM @ 210 FTH