



www.pfcestore.com - 763-425-7890 / 800-328-2350

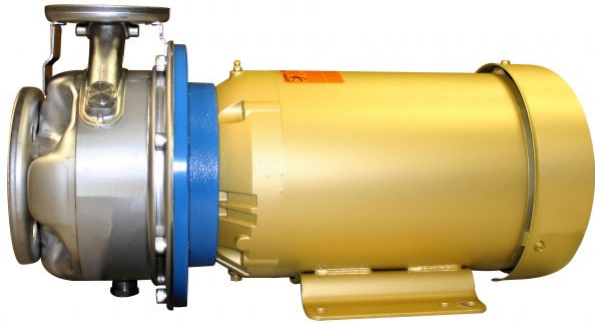

## GOULDS 15SH06 E-SH PUMP 316SS WITH VITON

316SS | VITON MECH SEAL | 10HP  
TEFC PRE EFF, 3500RPM,  
3/60/208/230-460 VOLTS | 1-1/2 x  
2-1/2-6 | 150LB FLANGES | BEP 175  
GPM @ 125 FTH



**SKU:** 15SH06A10T3E2

**Stock:** Out of stock contact us for  
lead time

**Categories:** [Goulds e-SH Pumps](#)

**Tags:** [GOULDS e-SH PUMPS](#)

**Part Number** 15SH06A10T3E2

## PRODUCT DESCRIPTION

Goulds e-SH Pump 316SS are Superior Materials of Construction: AISI Type 316L stainless steel pump parts for reduced corrosion and improved strength and ductility.

Back Pull-Out Design: Simplifies maintenance when used with spacer type coupling.

Mechanical Seal: Standard John Crane Type 21 mechanical seal.

Suction and Discharge Flanges: Mate with ANSI class 150 flanges.

Close-Coupled Design: Compact design saves space and simplifies maintenance

www.pfcestore.com - 763-425-7890 / 800-328-2350

Enclosed impeller

Estimated delivery is 3 to 4 weeks

Contact us for actual lead time

Product photo could vary from the actual product

[Curve](#)

[Brochure Specs](#)

ADDITIONAL INFORMATION

|                       |                                   |
|-----------------------|-----------------------------------|
| Weight                | 215 lbs                           |
| Dimensions            | 36 × 22 × 22 in                   |
| Best Efficiency Point | <a href="#">175 GPM @ 125 FTH</a> |
| Wetted Material       | <a href="#">316SS-VITON</a>       |
| Connections           | <a href="#">1.5 X 2.5</a>         |
| Hertz                 | <a href="#">60</a>                |
| Horse Power           | <a href="#">10</a>                |
| Motor Type            | <a href="#">TEFC</a>              |
| Phase                 | <a href="#">3</a>                 |
| RPM                   | <a href="#">3500</a>              |
| Voltage               | <a href="#">208-230-460</a>       |