


www.pfcstore.com - 763-425-7890 / 800-328-2350



## GOULDS 15SH06 E-SH PUMP 316SS WITH VITON

316SS | VITON MECH SEAL | 10HP  
TEFC PRE EFF, 3500RPM,  
3/60/208/230-460 VOLTS | 1-1/2 x  
2-1/2-6 | 150LB FLANGES | BEP 175  
GPM @ 125 FTH

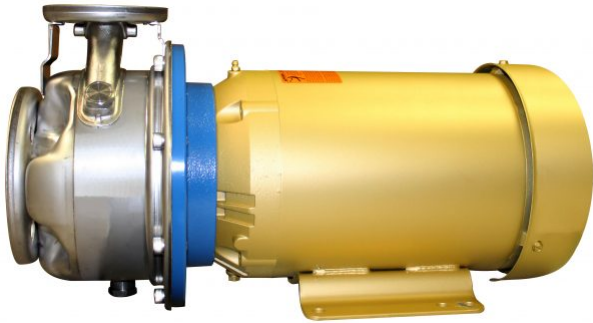

**SKU:** 15SH06A10T3E2

**Stock:** Out of stock contact us for  
lead time

**Categories:** [Goulds e-SH Pumps](#)

**Tags:** [GOULDS e-SH PUMPS](#)

**Part Number** 15SH06A10T3E2

## PRODUCT DESCRIPTION

Goulds e-SH Pump 316SS are Superior Materials of Construction: AISI Type 316L stainless steel pump parts for reduced corrosion and improved strength and ductility.

Back Pull-Out Design: Simplifies maintenance when used with spacer type coupling.

Mechanical Seal: Standard John Crane Type 21 mechanical seal.

Suction and Discharge Flanges: Mate with ANSI class 150 flanges.

Close-Coupled Design: Compact design saves space and simplifies maintenance

www.pfcstore.com - 763-425-7890 / 800-328-2350

Enclosed impeller

Estimated delivery is 3 to 4 weeks

Contact us for actual lead time

Product photo could vary from the actual product

[Curve](#)

[Brochure Specs](#)

## ADDITIONAL INFORMATION

|                              |  |
|------------------------------|--|
| <b>Weight</b>                | 215 lbs                                  |
| <b>Dimensions</b>            | 36 × 22 × 22 in                          |
| <b>Best Efficiency Point</b> | <a href="#"><u>175 GPM @ 125 FTH</u></a> |
| <b>Wetted Material</b>       | <a href="#"><u>316SS-VITON</u></a>       |
| <b>Connections</b>           | <a href="#"><u>1.5 X 2.5</u></a>         |
| <b>Hertz</b>                 | <a href="#"><u>60</u></a>                |
| <b>Horse Power</b>           | <a href="#"><u>10</u></a>                |
| <b>Motor Type</b>            | <a href="#"><u>TEFC</u></a>              |
| <b>Phase</b>                 | <a href="#"><u>3</u></a>                 |
| <b>RPM</b>                   | <a href="#"><u>3500</u></a>              |
| <b>Voltage</b>               | <a href="#"><u>208-230-460</u></a>       |