


www.pfcestore.com - 763-425-7890 / 800-328-2350



GOULDS 15SH08 E-SH PUMP 316SS WITH VITON

316SS | VITON MECH SEAL | 15HP
TEFC PRE EFF, 3500RPM,
3/60/208/230-460 VOLTS | 1-1/2 x
2-1/2-8 | 150LB FLANGES | BEP 192
GPM @ 169 FTH

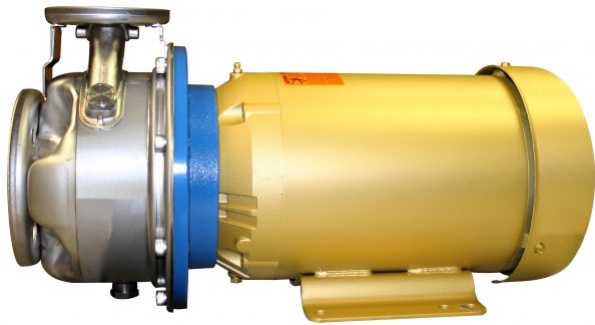

SKU: 15SH08B15T3E2

Stock: Out of stock contact us for
lead time

Categories: [Goulds e-SH Pumps](#)

Part Number 15SH08B15T3E2

PRODUCT DESCRIPTION

Goulds e-SH Pump 316SS are Superior Materials of Construction: AISI Type 316L stainless steel pump parts for reduced corrosion and improved strength and ductility.

Back Pull-Out Design: Simplifies maintenance when used with spacer type coupling.

Mechanical Seal: Standard John Crane Type 21 mechanical seal.

Suction and Discharge Flanges: Mate with ANSI class 150 flanges.

Close-Coupled Design: Compact design saves space and simplifies maintenance

www.pfcstore.com - 763-425-7890 / 800-328-2350

Enclosed impeller

Estimated delivery is 3 to 4 weeks

Contact us for actual lead time

Product photo could vary from the actual product

[Curve](#)

[Brochure Specs](#)

ADDITIONAL INFORMATION

| | |
|------------------------------|-----------------------------------|
| Weight | 330 lbs |
| Dimensions | 36 × 22 × 22 in |
| Best Efficiency Point | 192 GPM @ 169 FTH |
| Wetted Material | 316SS-VITON |
| Connections | 1.5 X 2.5 |
| Hertz | 60 |
| Horse Power | 15 |
| Motor Type | TEFC |
| Phase | 3 |
| RPM | 3500 |
| Voltage | 208-230-460 |

316SS | VITON MECH SEAL | 15HP TEFC PRE EFF, 3500RPM, 3/60/208/230-460

www.pfcestore.com - 763-425-7890 / 800-328-2350

VOLTS | 1-1/2 x 2-1/2-8 | 150LB FLANGES | BEP 192 GPM @ 169 FTH