PFC eSTORE
Clear Solutions Technology Company

**www.pfcestore.com - 763-425-7890 / 800-328-2350**

# GOULDS AQUAFORCE DUPLEX BOOSTER SYSTEM 15SV4- 460V

One Pump - 90 GPM @ 210 FTH.
Two Pumps - 180 GPM @ 210 FTH
- Material - Cast Iron/304SS.
Mechanical Seal Car/Silcar Viton.
Connections 4" Grooved

---

**SKU:** FG-HVL2D4-15SV4GH4F60
**Stock:** Out of stock contact us for lead time
**Categories:** Goulds Booster Skids

**Part Number** FG-HVL2D4-15SV4GH4F60

## PRODUCT DESCRIPTION

**Goulds AquaForce Booster Systems.** Every e-HV station is provided with rugged 304SS base and framing, common 304SS grooved suction and discharge manifolds with required pump fittings and is fully NSF/ANSI 61 & 372 certified for potable drinking water. Each pump is outfitted with a master Hydrovar® variable speed pump control/VFD with individual pump disconnects ensuring full redundancy for systems that require no downtime. Each station is fully tested for flow and pressure and comes programmed

PFC eSTORE
Clear Solutions Technology Company

www.pfcestore.com - 763-425-7890 / 800-328-2350

ready to install

## CERTIFICATIONS

•ASHRAE 90.1-2016 Compliant
• NSF/ANSI 61 & 372 Certified
• UL CQCZJ
• cUL
• UL508A
• NEC

**Estimated delivery is 3 to 4 weeks - Please contact us for current delivery**

# Features that make a difference

**1. Hydrovar Variable Speed Pump Control/VFD**
The e-HV comes standard with Xylem's proven Hydrovar variable speed pump control/VFD for pressure boosting applications. Standard NEMA 1, mutli-master configuration make the e-HV the obvious choice for your critical applications.

**2. Individual Pump Disconnects**
With integrated through the door pump circuit breakers located in a NEMA 12 station disconnect enclosure, the e-HV allows for ease of service without the need to shut down the entire Booster package.

**3. Premium Efficient**
The e-HV utilizes off the shelf TEFC Premium Efficient NEMA Frame motors, eliminating the need for special order motor/drive combination units.

**4. Stainless Steel**
Corrosion? Not with e-HV. With a standard 304SS base and framing you can feel confident in placing the e-HV in almost any location. And as always, the 304SS grooved suction and discharge manifolds allow for simple installation into any piping system.

**5. Compact**
By utilizing items such as our Hydrovar with molded wiring harnesses, e-SV pumps with minimal spacing and optimized pump trim, we have been able to deliver high performance in a compact system.

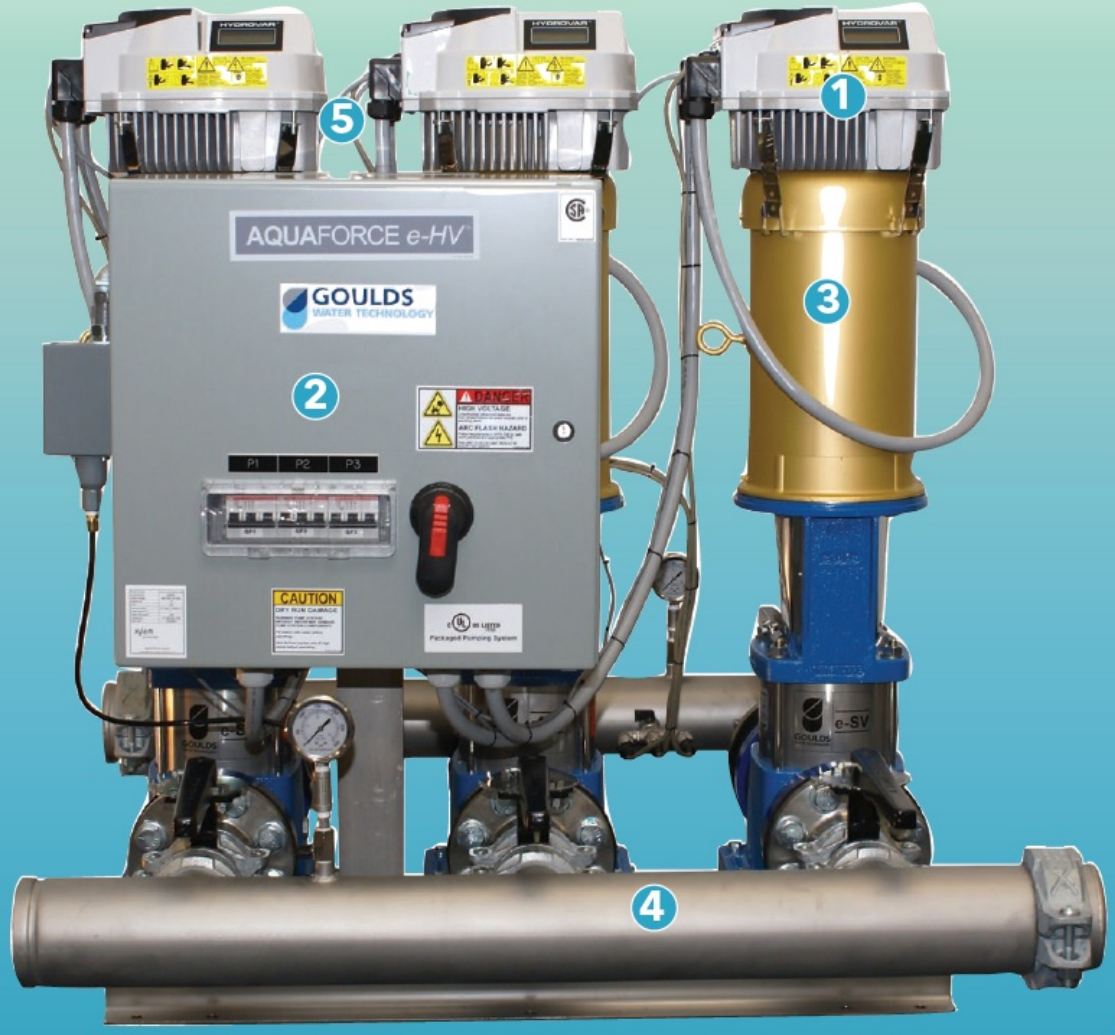


PAGE 4

PFC eSTORE
Clear Solutions Technology Company

www.pfcestore.com - 763-425-7890 / 800-328-2350

Specs & Curve

Technical Brochure

Quick Start

## ADDITIONAL INFORMATION

| | |
|---|---|
| **Weight** | 900 lbs |
| **Dimensions** | 40 × 58 × 54 in |
| **Best Efficiency Point** | 180 GPM @ 210 FTH |
| **Input Volts** | 440-480 |
| **Wetted Material** | CAST IRON-304SS-VITON |