


www.pfcestore.com - 763-425-7890 / 800-328-2350



## GRUNDFOS - PACO LF CENTRIFUGAL PUMP 15955 20 HP

CAST IRON/STAINLESS IMPELLER |  
BUNA MECH SEAL | 20HP TEFC PRE  
EFF, 3600RPM, 3/60/208/230-460  
VOLTS | 2 X 1.50 - IMPELLER 8.34"  
| CONNECTIONS- NPS | BEP 180  
GPM @ 245 FTH

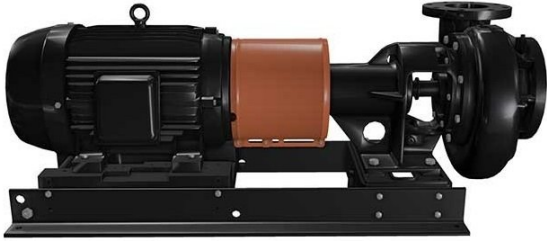

**SKU:** 99426077

**Stock:** Out of stock contact us for  
lead time

**Categories:** [Paco LF Pumps](#)

**Model Number**

11-15955-133P08-2851P

BPRNC2S101AA

**Part Number** 99426077

## PRODUCT DESCRIPTION

### LF Frame mounted centrifugal Pump

- Machined Mounting Surfaces and Fabricated Base Plate – aid in alignment

[www.pfcestore.com](http://www.pfcestore.com) - 763-425-7890 / 800-328-2350

- Choice of Motor Enclosures – increases flexibility of design
- Large Seal Chamber – allows various seal configurations and customization
- Integrally Cast Diffuser Vane – reduces turbulence and need for suction guides
- Francis Vane Impeller Design – increases efficiency and reduces NPSH required
- Bronze Case Wear Rings – extend pump life and increase efficiency
- Trimmed and Balanced Impellers – customization, reduced noise and vibration, & prolonged seal and bearing life

### **Applications**

- HVAC
- Plumbing
- Pressure Boosting
  - Industrial
- Water Utility
- Wastewater
- Agriculture

**Estimated delivery is 3 to 4 weeks**

[SPEC & CURVES](#)

[PARTS GUIDE](#)

[LF Manual](#)

### **ADDITIONAL INFORMATION**

|                    |                                |
|--------------------|--------------------------------|
| <b>Weight</b>      | 495 lbs                        |
| <b>Dimensions</b>  | 42 × 24 × 24 in                |
| <b>Connections</b> | <a href="#"><u>2 X 1.5</u></a> |

www.pfcestore.com - 763-425-7890 / 800-328-2350

|                       |                          |
|-----------------------|--------------------------|
| Best Efficiency Point | <u>180 GPM @ 245 FTH</u> |
| Hertz                 | <u>60</u>                |
| Horse Power           | <u>20</u>                |
| Motor Type            | <u>TEFC</u>              |
| Phase                 | <u>3</u>                 |
| RPM                   | <u>3600</u>              |
| Voltage               | <u>230-460</u>           |
| Wetted Material       | <u>CAST IRON-BUNA</u>    |