




## MICROPUMP GAT23 GEAR PUMP

4.6 GPH @ 40 PSI, based on 1cp at 3450RPM. Material 316SS, Gear carbon Graphite, Static Seal PTFE. Temp range -50°F/350°F. A-mount.

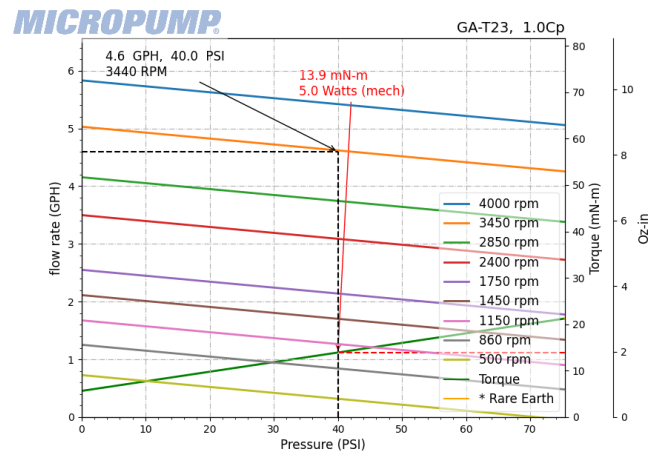

The data presented here are estimated based on combined historical data and calculations of physical science. Actual performance will vary. This information constitutes the proprietary/confidential information of Micropump and may not be distributed without permission. MPAApp\_rel\_2\_1.py, 2023-12-01, Copyright 2022, Micropump, inc.



**SKU:** 81726

**Stock:** 2 in stock (can be backordered)

**Categories:** [Micropumps](#)

**Model Number** GA-T23.P9FS.A  
**Part Number** 81726

## PRODUCT DESCRIPTION

### PRODUCT FEATURES

- Small Size
- Smooth, Pulseless Delivery
  - Chemically Resistant
  - Easy to Service
  - Proven Reliability
- Advanced Pump Technology
  - Wide Range of Options
  - OEM Configurations
- High-System Pressure Capability
  - Enhanced Efficiency

**If not in stock usual lead time is 5 to 6 weeks**

[Spec & Curves](#)

## ADDITIONAL INFORMATION


<b>Weight</b>	3 lbs
<b>Dimensions</b>	5 × 3 × 3 in
<b>Max GPH</b>	<u>5.1</u>
<b>Max PSI</b>	<u>75</u>

4.6 GPH @ 40 PSI, based on 1cp at 3450RPM. Material 316SS, Gear carbon Graphite, Static Seal PTFE. Temp range -50°F/350°F. A-mount.

www.pfcstore.com - 763-425-7890 / 800-328-2350

## MICROPUMP

GA-T23, 1.0Cp

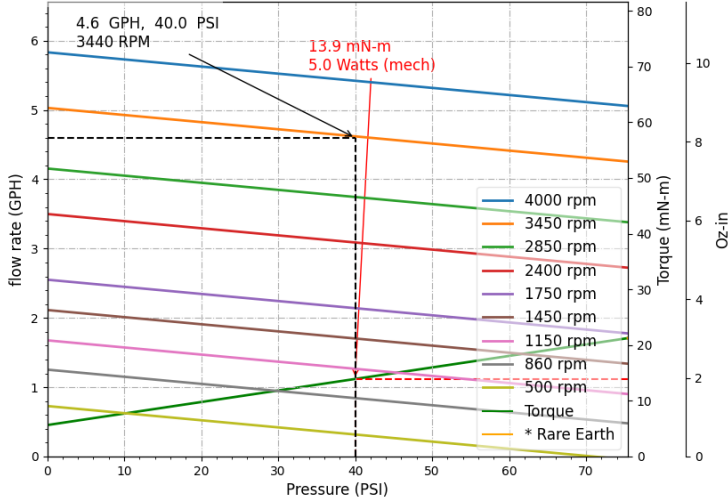

The data presented here are estimated based on combined historical data and calculations of physical science. Actual performance will vary. This information constitutes the proprietary/confidential information of Micropump and may not be distributed without permission. MFApp\_rel\_2\_1.py, 2023-12-01, Copyright 2022, Micropump, inc.