




MICROPUMP GAV21 GEAR PUMP

2.1 GPH @ 40 PSI, based on 1cp at 3450RPM. Material 316SS, Gear carbon fiber PTFE pin drive, Static Seal PTFE. Temp range -50°F/350°F. A-mount.

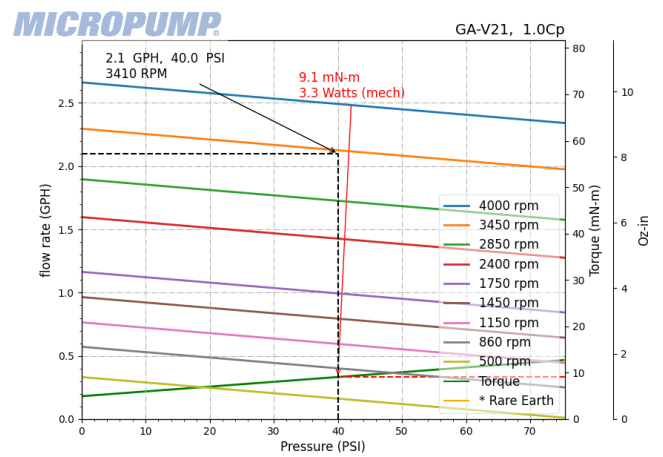

The data presented here are estimated based on combined historical data and calculations of physical science. Actual performance will vary. This information constitutes the proprietary/confidential information of Micropump and may not be distributed without permission. MPAApp_rel_2_1.py, 2023-12-01, Copyright 2022, Micropump, inc.



SKU: L21382

Stock: Out of stock contact us for lead time

Categories: [Micropumps](#)

Model Number GA-V21.P8FS.A
Part Number L21382

www.pfcstore.com - 763-425-7890 / 800-328-2350

PRODUCT DESCRIPTION

PRODUCT FEATURES

- Small Size
- Smooth, Pulseless Delivery
 - Chemically Resistant
 - Easy to Service
 - Proven Reliability
- Advanced Pump Technology
 - Wide Range of Options
 - OEM Configurations
- High-System Pressure Capability
 - Enhanced Efficiency

If not in stock usual lead time is 5 to 6 weeks

[Spec & Curves](#)


ADDITIONAL INFORMATION

Weight	3 lbs
Dimensions	5 × 3 × 3 in
Max GPH	<u>2.3</u>
Max PSI	<u>40</u>

2.1 GPH @ 40 PSI, based on 1cp at 3450RPM. Material 316SS, Gear carbon fiber PTFE pin drive, Static Seal PTFE. Temp range -50°F/350°F. A-mount.

www.pfcstore.com - 763-425-7890 / 800-328-2350

MICROPUMP

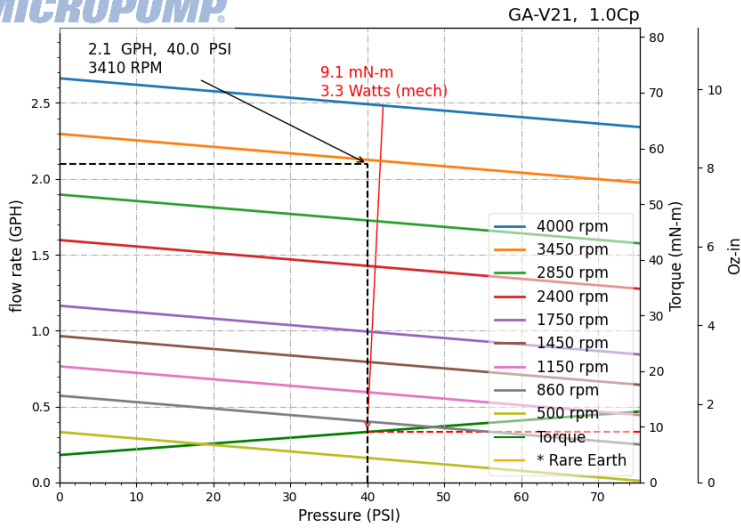

The data presented here are estimated based on combined historical data and calculations of physical science. Actual performance will vary. This information constitutes the proprietary/confidential information of Micropump and may not be distributed without permission. MFApp_rel_2_1.py, 2023-12-01, Copyright 2022, Micropump, inc.