


www.pfcstore.com - 763-425-7890 / 800-328-2350



## MICROPUMP GAX21 GEAR PUMP

.8 GPH @ 40 PSI, based on 1cp at 3450RPM. Material 316SS, Gear carbon Fiber, Static Seal PTFE. Temp range -50°F/350°F. E-mount 56c. Ferrite Hub is included

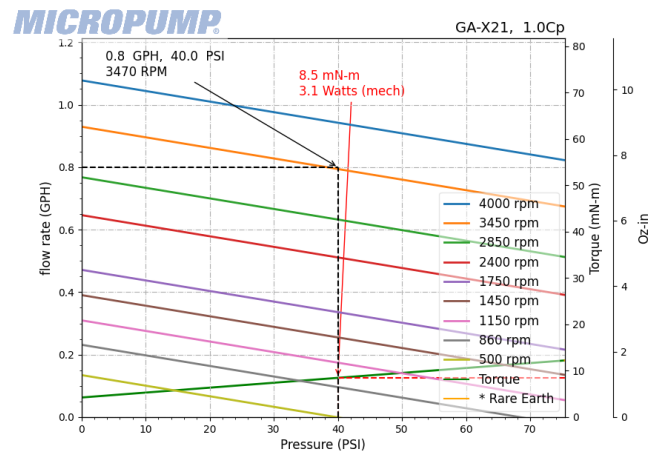

The data presented here are estimated based on combined historical data and calculations of physical science. Actual performance will vary. This information constitutes the proprietary/confidential information of Micropump and may not be distributed without permission. MPAApp\_rel\_2\_1.py, 2023-12-01, Copyright 2022, Micropump, inc.



**SKU:** L22029

**Stock:** 1 in stock (can be backordered)

**Categories:** [Micropumps](#)

**Model Number** GA-X21.P8FS.E  
**Part Number** L22029

www.pfcstore.com - 763-425-7890 / 800-328-2350

## PRODUCT DESCRIPTION

### PRODUCT FEATURES

- Small Size
- Smooth, Pulseless Delivery
  - Chemically Resistant
  - Easy to Service
  - Proven Reliability
- Advanced Pump Technology
  - Wide Range of Options
  - OEM Configurations
- High-System Pressure Capability
  - Enhanced Efficiency

**If not in stock usual lead time is 5 to 6 weeks**

[Spec & Curves](#)


## ADDITIONAL INFORMATION

<b>Weight</b>	3 lbs
<b>Dimensions</b>	5 × 3 × 3 in
<b>Max GPH</b>	<u>.90</u>
<b>Max PSI</b>	<u>30</u>

.8 GPH @ 40 PSI, based on 1cp at 3450RPM. Material 316SS, Gear carbon Fiber, Static Seal PTFE. Temp range -50°F/350°F. E-mount 56c. Ferrite Hub is

www.pfcstore.com - 763-425-7890 / 800-328-2350

included

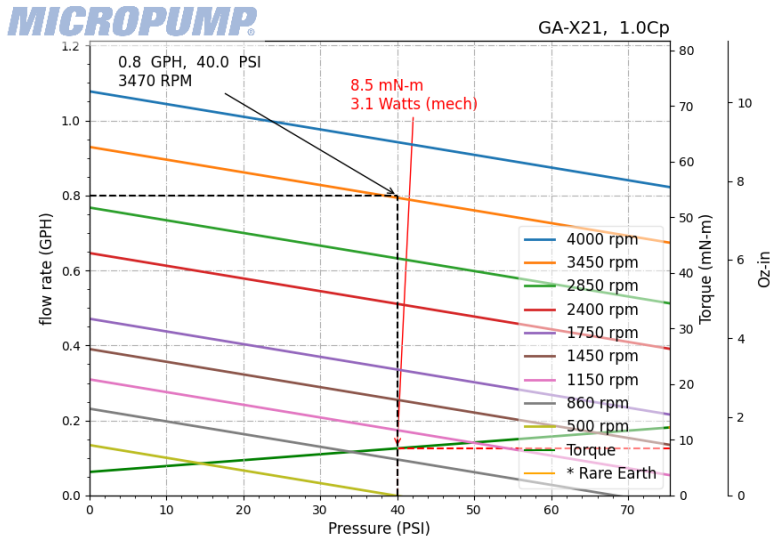

The data presented here are estimated based on combined historical data and calculations of physical science. Actual performance will vary. This information constitutes the proprietary/confidential information of Micropump and may not be distributed without permission. MPApp\_rel\_2\_1.py, 2023-12-01, Copyright 2022, Micropump, inc.