


www.pfcstore.com - 763-425-7890 / 800-328-2350



MICROPUMP GJN23 GEAR PUMP, W/INTERNAL BYPASS & MP PLATE MOUNT

28.5 GPH @ 40 PSI, based on 1cp at 3450RPM. Material 316SS, Gear carbon fiber/PTFE, Static Seal PTFE. Temp range -50°F/250°F. MP Plate mount.

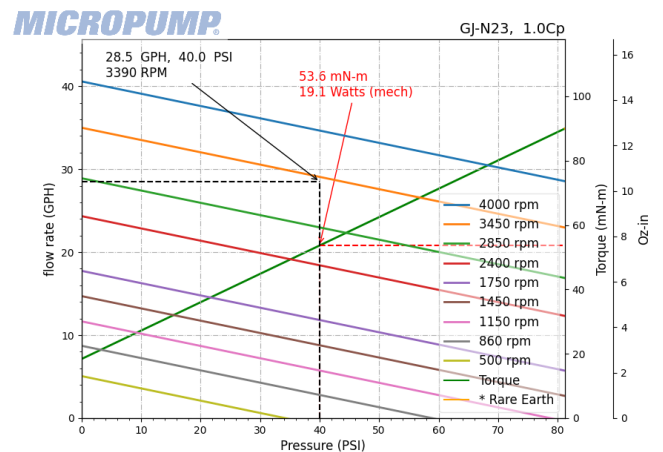

The data presented here are estimated based on combined historical data and calculations of physical science. Actual performance will vary. This information constitutes the proprietary/confidential information of Micropump and may not be distributed without permission. MPApp_rel_2_1.py, 2023-12-01, Copyright 2022, Micropump, inc.



SKU: 81529

Stock: 3 in stock (can be backordered)

Categories: [Micropumps](#)

www.pfcestore.com - 763-425-7890 / 800-328-2350

Model Number GJ-N23.PF1S.B-B1
Part Number 81529

PRODUCT DESCRIPTION

PRODUCT FEATURES

- Small Size
- Smooth, Pulseless Delivery
 - Chemically Resistant
 - Easy to Service
 - Proven Reliability
- Advanced Pump Technology
 - Wide Range of Options
 - OEM Configurations
- High-System Pressure Capability
 - Enhanced Efficiency

If not in stock usual lead time is 5 to 6 weeks


[Spec & Curves](#)

ADDITIONAL INFORMATION

Weight	3 lbs
Dimensions	5 × 3 × 3 in
Max GPH	<u>36</u>
Max PSI	<u>80</u>

www.pfcstore.com - 763-425-7890 / 800-328-2350

28.5 GPH @ 40 PSI, based on 1cp at 3450RPM. Material 316SS, Gear carbon fiber/PTFE, Static Seal PTFE. Temp range -50°F/250°F. MP Plate mount.

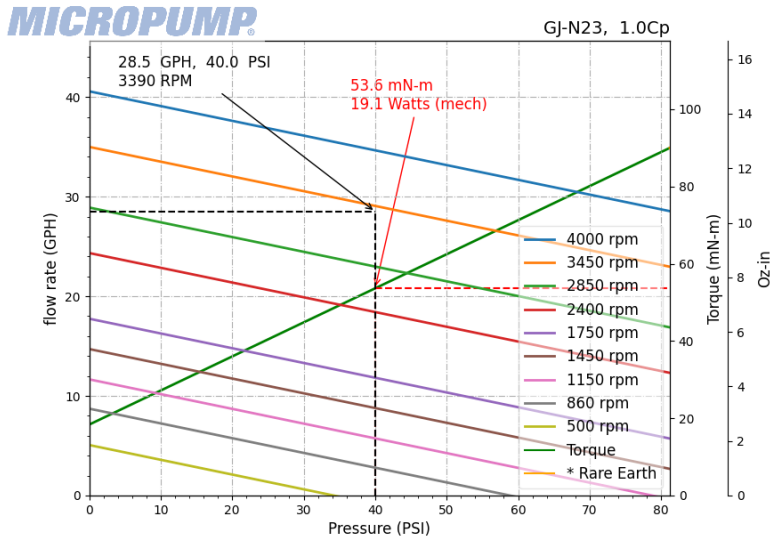

The data presented here are estimated based on combined historical data and calculations of physical science. Actual performance will vary. This information constitutes the proprietary/confidential information of Micropump and may not be distributed without permission. MPApp_rel_2_1.py, 2023-12-01, Copyright 2022, Micropump, inc.