




## MICROPUMP GJN23 GEAR PUMP, W/INTERNAL BYPASS

28.5 GPH @ 40 PSI, max based on 1cp at 3450RPM. Material 316SS, Gear PTFE, Static Seal PTFE. Temp range -50°F/130°F. A-mount.

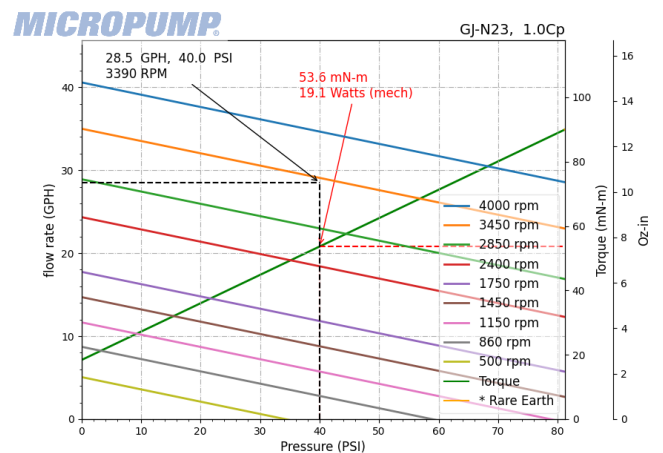

The data presented here are estimated based on combined historical data and calculations of physical science. Actual performance will vary. This information constitutes the proprietary/confidential information of Micropump and may not be distributed without permission. MPApp\_rel\_2\_1.py, 2023-12-01, Copyright 2022, Micropump, inc.



**SKU:** 81110

**Stock:** 1 in stock (can be backordered)

**Categories:** [Micropumps](#)

**Model Number** GJ-N23.FF1S.A-B1  
**Part Number** 81110

www.pfcstore.com - 763-425-7890 / 800-328-2350

## PRODUCT DESCRIPTION

### PRODUCT FEATURES

- Small Size
- Smooth, Pulseless Delivery
  - Chemically Resistant
    - Easy to Service
    - Proven Reliability
- Advanced Pump Technology
  - Wide Range of Options
    - OEM Configurations
- High-System Pressure Capability
  - Enhanced Efficiency

**If not in stock usual lead time is 5 to 6 weeks**

[Spec & Curves](#)


## ADDITIONAL INFORMATION

<b>Weight</b>	3 lbs
<b>Dimensions</b>	5 × 3 × 3 in
<b>Max GPH</b>	<u>36</u>
<b>Max PSI</b>	<u>80</u>

28.5 GPH @ 40 PSI, max based on 1cp at 3450RPM. Material 316SS, Gear PTFE, Static Seal PTFE. Temp range -50°F/130°F. A-mount.

www.pfcstore.com - 763-425-7890 / 800-328-2350

## MICROPUMP

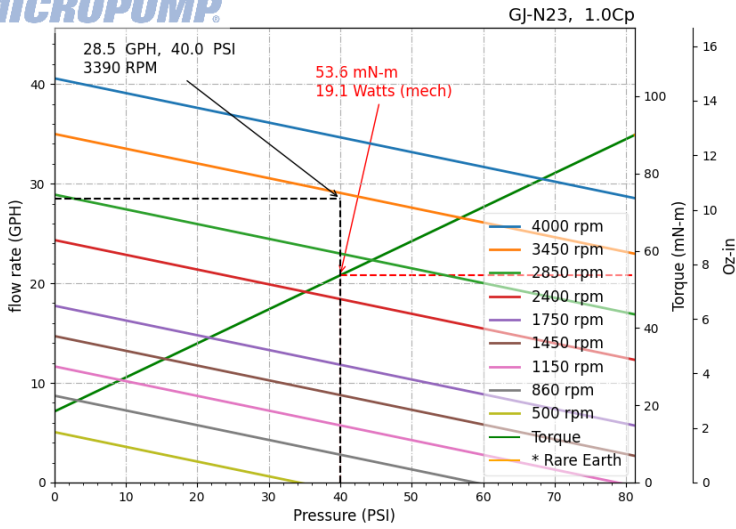

The data presented here are estimated based on combined historical data and calculations of physical science. Actual performance will vary. This information constitutes the proprietary/confidential information of Micropump and may not be distributed without permission. MFApp\_rel\_2\_1.py, 2023-12-01, Copyright 2022, Micropump, inc.