




## MICROPUMP GJN25 GEAR PUMP

44 GPH @ 40 PSI, based on 1cp at 3450RPM. Material 316SS, Gear PTFE, Static Seal PTFE. Temp range -50°F/130°F. A-mount.

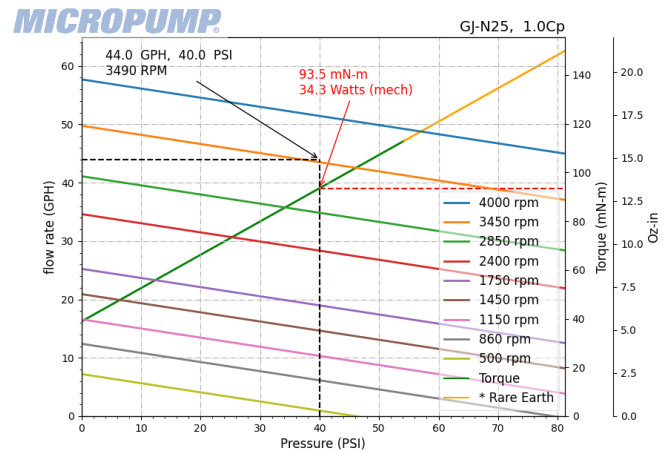

The data presented here are estimated based on combined historical data and calculations of physical science. Actual performance will vary. This information constitutes the proprietary/confidential information of Micropump and may not be distributed without permission. MPApp\_rel\_2\_1.py, 2023-12-01, Copyright 2022, Micropump, inc.



**SKU: 81486**

**Stock:** Out of stock contact us for lead time

**Categories:** [Micropumps](#)

**Model Number** GJ-N25.FF1S.A  
**Part Number** 81486

www.pfcstore.com - 763-425-7890 / 800-328-2350

## PRODUCT DESCRIPTION

### PRODUCT FEATURES

- Small Size
- Smooth, Pulseless Delivery
  - Chemically Resistant
  - Easy to Service
  - Proven Reliability
- Advanced Pump Technology
  - Wide Range of Options
  - OEM Configurations
- High-System Pressure Capability
  - Enhanced Efficiency

**If not in stock usual lead time is 5 to 6 weeks**

[Spec & Curves](#)


## ADDITIONAL INFORMATION

<b>Weight</b>	3 lbs
<b>Dimensions</b>	5 × 3 × 3 in
<b>Max GPH</b>	<u>50</u>
<b>Max PSI</b>	<u>80</u>

44 GPH @ 40 PSI, based on 1cp at 3450RPM. Material 316SS, Gear PTFE, Static Seal PTFE. Temp range -50°F/130°F. A-mount.

www.pfcstore.com - 763-425-7890 / 800-328-2350

## MICROPUMP

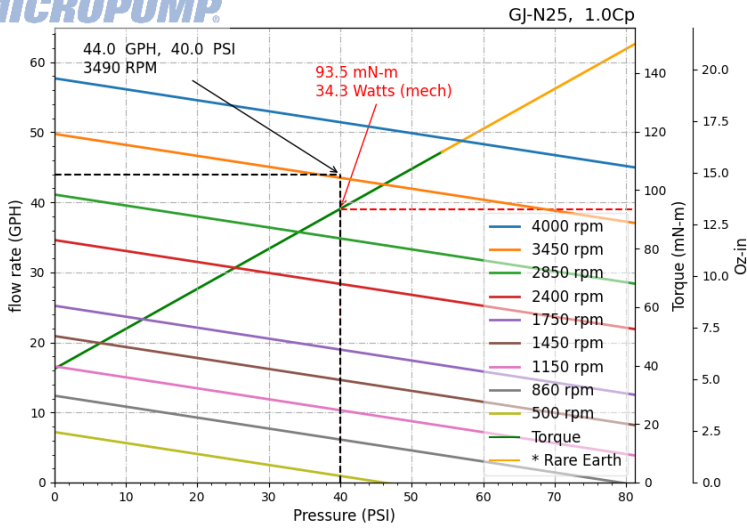

The data presented here are estimated based on combined historical data and calculations of physical science. Actual performance will vary. This information constitutes the proprietary/confidential information of Micropump and may not be distributed without permission. MFApp\_rel\_2\_1.py, 2023-12-01, Copyright 2022, Micropump, inc.