




MICROPUMP GJN25 GEAR PUMP, W/INTERNAL BYPASS

44 GPH @ 40 PSI, based on 1cp at 3450RPM. Material 316SS, Gear PTFE, Static Seal PTFE. Temp range -50°F/130°F. A-mount.

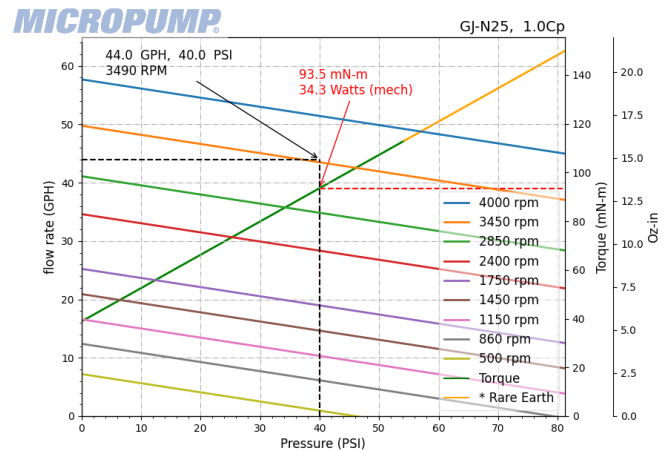

The data presented here are estimated based on combined historical data and calculations of physical science. Actual performance will vary. This information constitutes the proprietary/confidential information of Micropump and may not be distributed without permission. MPApp_rel_2_1.py, 2023-12-01, Copyright 2022, Micropump, inc.



SKU: 81111

Stock: Out of stock contact us for lead time

Categories: [Micropumps](#)

Model Number GJ-N25.FF1S.A-B1
Part Number 81111

www.pfcstore.com - 763-425-7890 / 800-328-2350

PRODUCT DESCRIPTION

PRODUCT FEATURES

- Small Size
- Smooth, Pulseless Delivery
 - Chemically Resistant
 - Easy to Service
 - Proven Reliability
- Advanced Pump Technology
 - Wide Range of Options
 - OEM Configurations
- High-System Pressure Capability
 - Enhanced Efficiency

If not in stock usual lead time is 5 to 6 weeks

[Spec & Curves](#)


ADDITIONAL INFORMATION

| | |
|-------------------|--------------|
| Weight | 3 lbs |
| Dimensions | 5 × 3 × 3 in |
| Max GPH | <u>40</u> |
| Max PSI | <u>80</u> |

44 GPH @ 40 PSI, based on 1cp at 3450RPM. Material 316SS, Gear PTFE, Static Seal PTFE. Temp range -50°F/130°F. A-mount.

www.pfcstore.com - 763-425-7890 / 800-328-2350

MICROPUMP

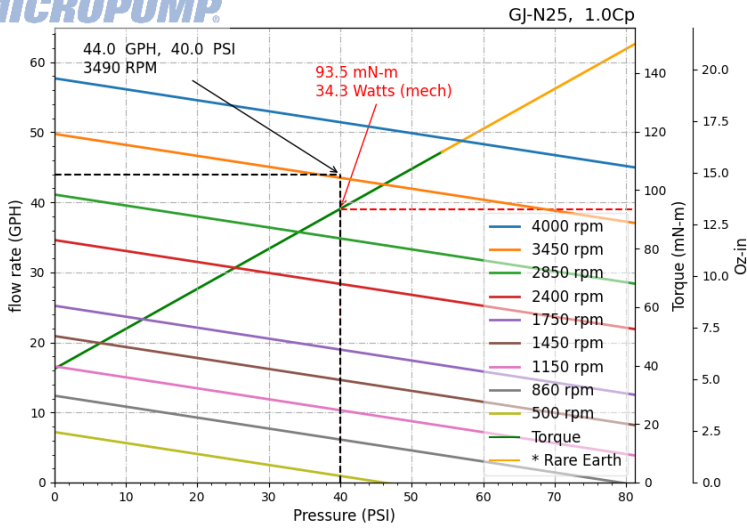

The data presented here are estimated based on combined historical data and calculations of physical science. Actual performance will vary. This information constitutes the proprietary/confidential information of Micropump and may not be distributed without permission. MFApp_rel_2_1.py, 2023-12-01, Copyright 2022, Micropump, inc.