




## MICROPUMP GLHH21 GEAR PUMP W/O HUB

220 GPH @ 60 PSI, based on 1cp at 3450RPM. Material 316SS, Gear carbon fiber/PTFE, Static Seal PTFE. Temp range -50°F/250°F.

Included E mount 56c.

Drive magnet sold separately.

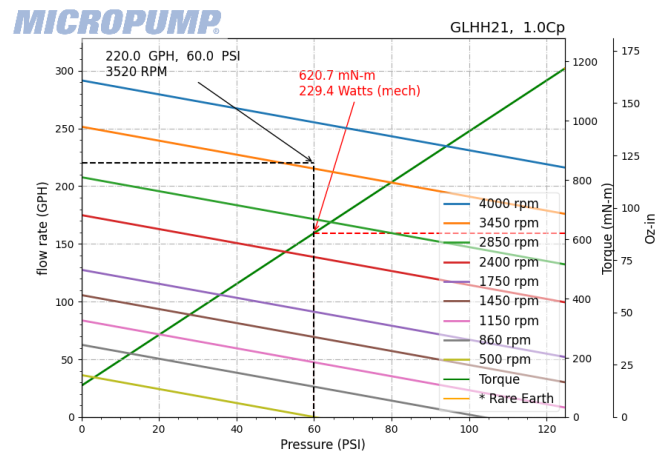

The data presented here are estimated based on combined historical data and calculations of physical science. Actual performance will vary. This information constitutes the proprietary/confidential information of Micropump and may not be distributed without permission. MPApp\_rel\_2\_1.py, 2023-12-01, Copyright 2022, Micropump, inc.



**SKU:** 86511

**Stock:** 2 in stock (can be backordered)

**Categories:** [Micropumps](#)

www.pfcstore.com - 763-425-7890 / 800-328-2350

**Model Number** GLH-H21.JFS.E-  
M2CH15  
**Part Number** 86511

## PRODUCT DESCRIPTION

### PRODUCT FEATURES

- Small Size
- Smooth, Pulseless Delivery
  - Chemically Resistant
  - Easy to Service
  - Proven Reliability
- Advanced Pump Technology
  - Wide Range of Options
  - OEM Configurations
- High-System Pressure Capability
  - Enhanced Efficiency

**If not in stock usual lead time is 5 to 6 weeks**

[Spec & Curves](#)

## ADDITIONAL INFORMATION


<b>Weight</b>	3 lbs
<b>Dimensions</b>	5 × 3 × 3 in
<b>Max GPH</b>	<a href="#"><u>252</u></a>
<b>Max PSI</b>	<a href="#"><u>125</u></a>

www.pfcstore.com - 763-425-7890 / 800-328-2350

220 GPH @ 60 PSI, based on 1cp at 3450RPM. Material 316SS, Gear carbon fiber/PTFE, Static Seal PTFE. Temp range -50°F/250°F.

Included E mount 56c.

Drive magnet sold separately.

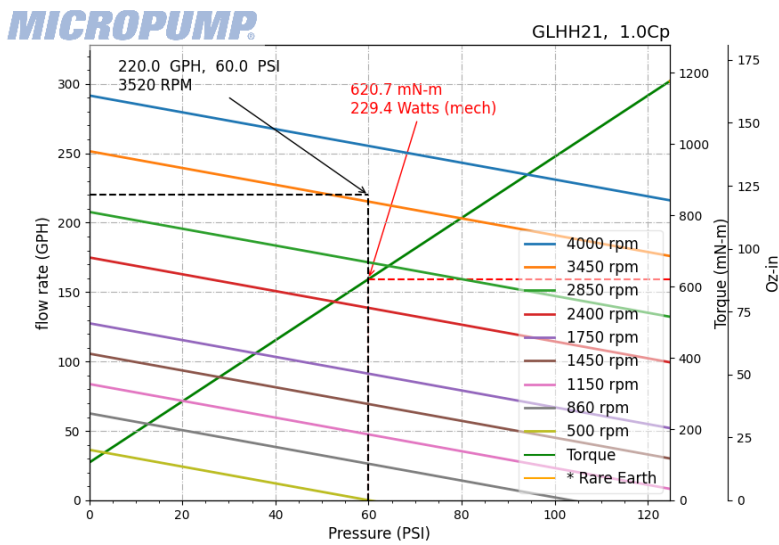

The data presented here are estimated based on combined historical data and calculations of physical science. Actual performance will vary. This information constitutes the proprietary/confidential information of Micropump and may not be distributed without permission. MPApp\_rel\_2\_1.py, 2023-12-01, Copyright 2022, Micropump, inc.