


www.pfcestore.com - 763-425-7890 / 800-328-2350

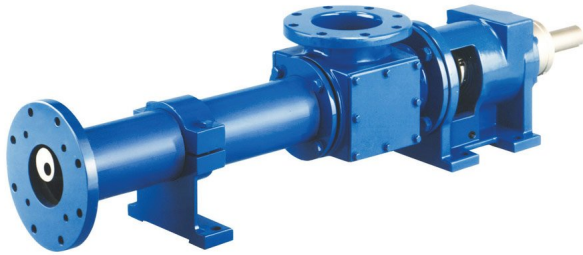

MOYNO® 2000G1 PUMP SINGLE STAGE, STAINLESS STEEL WITH NITRILE

CONTACT US FOR PRICING |

11.89 GPM Per 100 RPM, Max 87 PSI Data based on water @ 68F, Stainless Steel, Stator Nitrile 70 Durometer, Ansi Flange, Single Mech Seal, Rotor Chrome Plated, 5hp 3/60/230-460v Gear Motor, Long Coupled Mounted on Steel Base. Product photo could vary from the actual product



SKU: 1E012G1SSQ3SBA

Stock: Out of stock contact us for lead time

Categories: [Progressing Cavity Pumps](#)

Tags: [Moyno Pumps](#)

Model Number 2000G1

Part Number 1E012G1SSQ3SBA

www.pfcstore.com - 763-425-7890 / 800-328-2350

GALLERY IMAGES



www.pfcstore.com - 763-425-7890 / 800-328-2350

PRODUCT DESCRIPTION

Moyno® 2000G1 Long-coupled, versatile pump. Features patented joint seals to effectively protect the gear joints from pumpage contamination and a hollow drive shaft. Optional features include shaft sleeve, fiber deflector, and flush gland

2000G1 - FLANGED DESIGN

High-performance 2000 Pumps offer low maintenance, minimal downtime and long service life for low total cost of ownership.

Fluid Type

Broad range of viscosities and solids

Fluid Supply

Via standard pipe

Benefits

Best value for majority of applications

Typical Applications

- Oil
- Polymers
- Municipal sludge to 10% solids
 - Titanium Dioxide
 - Paper coatings
 - Mining Slurries

Estimated delivery is 6 to 8 weeks

Contact us for actual Lead times

www.pfcestore.com - 763-425-7890 / 800-328-2350

Product photo could vary from the actual product

[2000G1 Curves](#)

[2000G1 Dimensions](#)

**Our Moyno area covers Minnesota, Wisconsin, South
Dakota, North Dakota & the U.P. Michigan**

ADDITIONAL INFORMATION

Weight	1060 lbs
Dimensions	86 × 35 × 35 in
Recommended RPM	100 RPM to 300 RPM