


www.pfcstore.com - 763-425-7890 / 800-328-2350

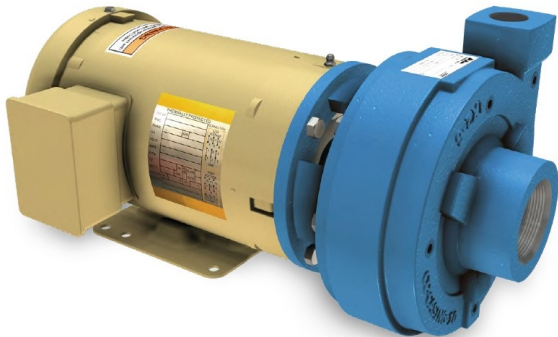

## SUMMIT CLOSE COUPLED PUMP IN CAST IRON BRONZE IMPELLER, 3 PHASE, 5HP, 3600RPM MOTOR

Best Efficiency Point 100 GPM @  
100 FTH, NPT 1X2-5.375

Mech Seal Car/Silcar/FKM

Baldor Motor 208/230/480 Volts,  
TEFC Premium Efficient



---

**SKU:** CC-LEK-10 / CC-AK-10-5.375-  
EJMM3613T

**Stock:** Out of stock contact us for  
lead time

**Categories:** [Summit Close  
Coupled Pumps](#)

**Part Number** CC1-1X2-6

## PRODUCT DESCRIPTION

[www.pfcstore.com](http://www.pfcstore.com) - 763-425-7890 / 800-328-2350

Summit CC pumps are horizontal, end suction, centrifugal pumps designed for general service such as clean water, solvents, light oils, non-corrosive chemicals, coolants and brines. Available in capacities to 2300 GPM heads to 440 feet, these pumps are an economical and dependable solution for your pumping needs. All Flanges are 125lb ANSI B16.1 rating; NPT connections are standard on 6" and most 8" sizes. A renewable bronze shaft sleeve is standard on cast iron pumps and a 316ss, shaft sleeve is standard on alloy pumps.

**Typical Lead time is 2 to 4 weeks**

[Curve](#)

[Brochure](#)

[Manual](#)

[Material of Construction](#)

## ADDITIONAL INFORMATION

<b>Weight</b>	175 lbs
<b>Dimensions</b>	30 × 18 × 16 in
<b>Best Efficiency Point</b>	<a href="#"><u>100 GPM @ 109 FTH</u></a>
<b>Phase</b>	<a href="#"><u>3</u></a>
<b>Wetted Material</b>	<a href="#"><u>CAST IRON BRONZE FITTED-VITON</u></a>

Best Efficiency Point 100 GPM @ 100 FTH, NPT 1X2-5.375

**www.pfcstore.com - 763-425-7890 / 800-328-2350**

Mech Seal Car/Silcar/FKM

Baldor Motor 208/230/480 Volts, TEFC Premium Efficient