


www.pfcstore.com - 763-425-7890 / 800-328-2350

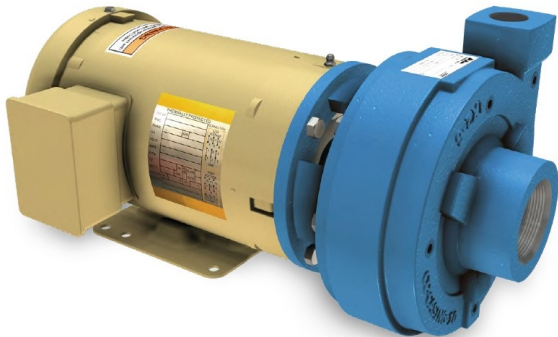

SUMMIT CLOSE COUPLED PUMP IN CAST IRON BRONZE IMPELLER, 3 PHASE, 7.5HP, 3600RPM MOTOR

Best Efficiency Point 140 GPM @
125 FTH, NPT 1.5X2-6"

Mech Seal Car/Silcar/FKM

Baldor Motor 230/480 Volts, TEFC
Premium Efficient



SKU: CC-LEK-12 / CC-AK-11-6-
EJMM3709T

Stock: Out of stock contact us for
lead time

Categories: [Summit Close
Coupled Pumps](#)

Part Number CC1-1.5X2-6J

PRODUCT DESCRIPTION

www.pfcstore.com - 763-425-7890 / 800-328-2350

Summit CC pumps are horizontal, end suction, centrifugal pumps designed for general service such as clean water, solvents, light oils, non-corrosive chemicals, coolants and brines. Available in capacities to 2300 GPM heads to 440 feet, these pumps are an economical and dependable solution for your pumping needs. All Flanges are 125lb ANSI B16.1 rating; NPT connections are standard on 6" and most 8" sizes. A renewable bronze shaft sleeve is standard on cast iron pumps and a 316ss, shaft sleeve is standard on alloy pumps.

Typical Lead time is 2 to 4 weeks

[Curve](#)

[Brochure](#)

[Manual](#)

[Material of Construction](#)

ADDITIONAL INFORMATION

Weight	235 lbs
Dimensions	36 × 18 × 16 in
Best Efficiency Point	<u>140 GPM @ 125 FTH</u>
Phase	<u>3</u>
Wetted Material	<u>CAST IRON BRONZE FITTED-VITON</u>

Best Efficiency Point 140 GPM @ 125 FTH, NPT 1.5X2-6"

www.pfcstore.com - 763-425-7890 / 800-328-2350

Mech Seal Car/Silcar/FKM

Baldor Motor 230/480 Volts, TEFC Premium Efficient