PFC eSTORE
Clear Solutions Technology Company

www.pfcestore.com - 763-425-7890 / 800-328-2350

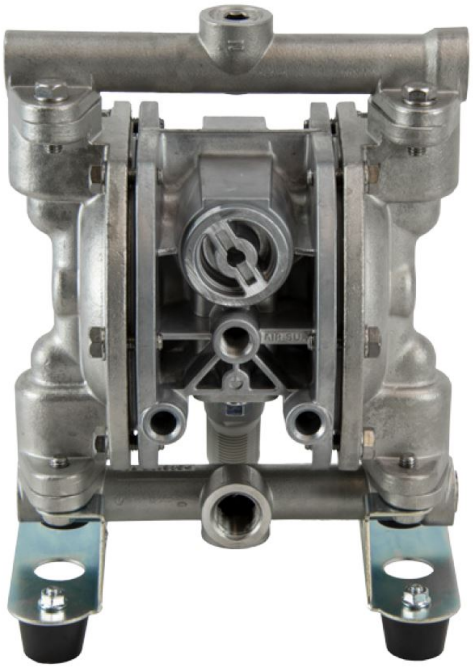

YAMADA AOD PUMP GLOBAL SERIES IN 316SS & BUNA G15

316SS-Buna

10 GPM @ 190 FTH / MAX 16.6 GPM

1/2 NPT Female

Max Temp 158°F

Maximum Dry Suction Lift: Rubber fitted pump capability: 13.5' - PTFE fitted pump capability: 11'

Replaces the ARO AODD Pump 660SJ

SKU: 854734
Stock: Out of stock contact us for lead time
Categories: AOD Pumps
Tags: Yamada Pumps
Model Number 854734
Part Number G15SN11

PFC eSTORE
Clear Solutions Technology Company

www.pfcestore.com - 763-425-7890 / 800-328-2350

PRODUCT DESCRIPTION

Yamada AOD Pump

G15 Global Series 1/2" AODD pumps provide a maximum flow rate of 16.6 GPM and are available in Aluminum, Stainless Steel (316), Pure Polypropylene and Kynar. We offer a wide selection of diaphragm materials that cover a variety of applications.

Yamada pumps utilize a Step Spool (S-Spool).

Yamada Global Series pumps do not have an independent pilot valve system (less parts) and consume less air versus the competition. Available with multiport options, these AODD pumps perform extremely well in continuous stop/start operations and provide exceptional suction lift.

Estimated delivery 2 weeks

Curves & Specs

ADDITIONAL INFORMATION

Weight	22 lbs
Dimensions	15 × 15 × 16 in
Connections	1/2"FNPT
Max GPM	16.6 GPM
Wetted Material	316SS-BUNA