


www.pfcstore.com - 763-425-7890 / 800-328-2350

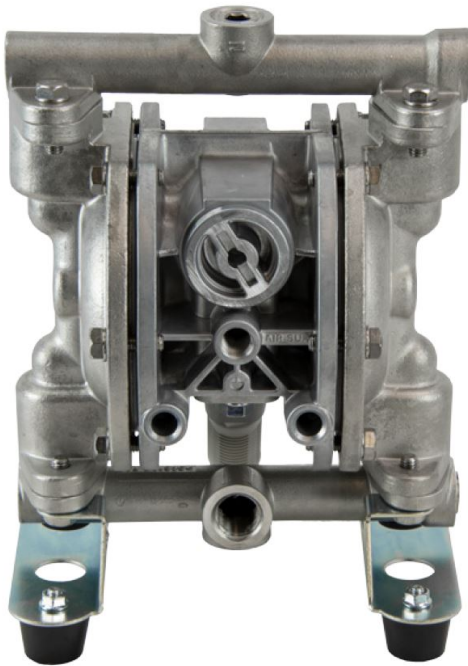

YAMADA AOD PUMP GLOBAL SERIES IN 316SS & PTFE G15

316SS-PTFE

10 GPM @ 190 FTH / MAX 16.6
GPM

1/2 NPT Female

Max Temp 212°F

Maximum Dry Suction Lift: Rubber
fitted pump capability: 13.5' - PTFE
fitted pump capability: 11'

Replaces the ARO AODD Pump
660Sj



SKU: 854735

Stock: Out of stock contact us for
lead time

Categories: [Yamada AODD
Pumps](#)

Model Number 854735

Part Number G15ST11

www.pfcstore.com - 763-425-7890 / 800-328-2350

PRODUCT DESCRIPTION

Yamada AOD Pump

G15 Global Series 1/2" AODD pumps provide a maximum flow rate of 16.6 GPM and are available in Aluminum, Stainless Steel (316), Pure Polypropylene and Kynar. We offer a wide selection of diaphragm materials that cover a variety of applications.

Yamada pumps utilize a Step Spool (S-Spool).

Yamada Global Series pumps do not have an independent pilot valve system (less parts) and consume less air versus the competition. Available with multiport options, these AODD pumps perform extremely well in continuous stop/start operations and provide exceptional suction lift.

Estimated delivery 2 weeks

[Curves & Specs](#)

ADDITIONAL INFORMATION

Weight	22 lbs
Dimensions	15 × 15 × 16 in
Connections	1/2"FNPT
Max GPM	16.6 GPM
Wetted Material	316SS-PTFE

www.pfcstore.com - 763-425-7890 / 800-328-2350

316SS-PTFE

10 GPM @ 190 FTH / MAX 16.6 GPM

1/2 NPT Female

Max Temp 212°F

Maximum Dry Suction Lift: Rubber fitted pump capability: 13.5' - PTFE fitted pump capability: 11'

Replaces the ARO AODD Pump 660Sj