


www.pfcstore.com - 763-425-7890 / 800-328-2350

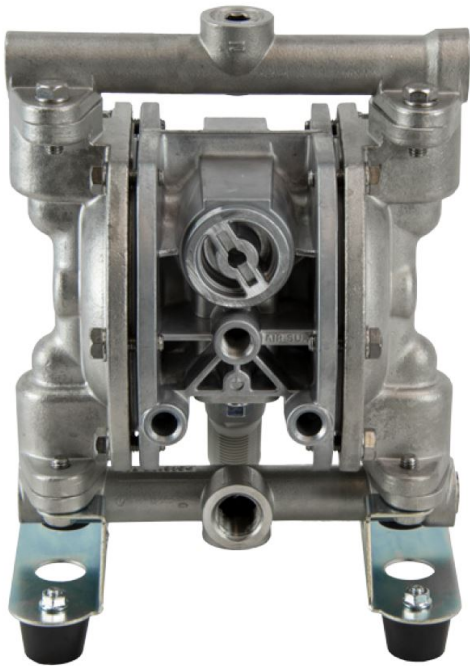

## YAMADA AOD PUMP GLOBAL SERIES IN 316SS SANTOPRENE & EPDM G15

316SS-Santoprene /EPDM Gasket

10 GPM @ 200 FTH / MAX 16.6  
GPM

1/2 NPT Female

Max Temp 212°F

Maximum Dry Suction Lift: Rubber  
fitted pump capability: 13.5' - PTFE  
fitted pump capability: 11'

Replaces the ARO AODD Pump  
660Sj



---

**SKU:** 854737

**Stock:** 1 in stock (can be  
backordered)

**Categories:** [Yamada AODD  
Pumps](#)

**Model Number** 854737

**Part Number** G15SS11

## PRODUCT DESCRIPTION

### Yamada AOD Pump

**G15 Global Series** 1/2" AODD pumps provide a maximum flow rate of 16.6 GPM and are available in Aluminum, Stainless Steel (316), Pure Polypropylene and Kynar. We offer a wide selection of diaphragm materials that cover a variety of applications.

### Yamada pumps utilize a Step Spool (S-Spool).

Yamada Global Series pumps do not have an independent pilot valve system (less parts) and consume less air versus the competition. Available with multiport options, these AODD pumps perform extremely well in continuous stop/start operations and provide exceptional suction lift.

### Estimated delivery 2 weeks

[Curves & Specs](#)

## ADDITIONAL INFORMATION

<b>Weight</b>	22 lbs
<b>Dimensions</b>	15 × 15 × 16 in
<b>Connections</b>	<a href="#">1/2"FNPT</a>
<b>Max GPM</b>	<a href="#">16.6 GPM</a>
<b>Wetted Material</b>	<a href="#">316SS-SANTOPRENE-EPDM</a>

[www.pfcstore.com](http://www.pfcstore.com) - 763-425-7890 / 800-328-2350

316SS-Santoprene /EPDM Gasket

10 GPM @ 200 FTH / MAX 16.6 GPM

1/2 NPT Female

Max Temp 212°F

Maximum Dry Suction Lift: Rubber fitted pump capability: 13.5' - PTFE fitted pump capability: 11'

Replaces the ARO AODD Pump 660Sj