


www.pfcstore.com - 763-425-7890 / 800-328-2350

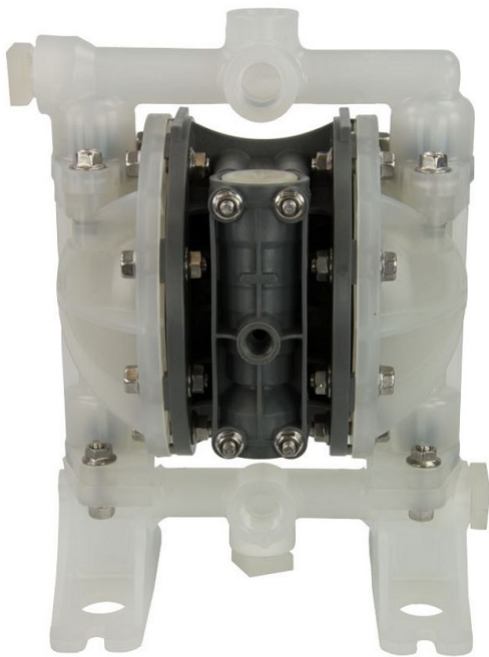

YAMADA AOD PUMP GLOBAL SERIES IN PURE POLYPRO SANTOPRENE & EPDM G15

Pure Polypro-Santoprene /EPDM
Gasket


10 GPM @ 100 FTH / MAX 16.6
GPM

1/2 NPT Female

Max Temp 180°F

Maximum Dry Suction Lift: Rubber
fitted pump capability: 13.5' - PTFE
fitted pump capability: 11'

Replaces the ARO AODD Pump
660Sj



SKU: 854917

Stock: Out of stock contact us for
lead time

Categories: [Yamada AODD
Pumps](#)

Model Number 854917

PRODUCT DESCRIPTION

Yamada AOD Pump

G15 Global Series 1/2" AODD pumps provide a maximum flow rate of 16.6 GPM and are available in Aluminum, Stainless Steel (316), Pure Polypropylene and Kynar. We offer a wide selection of diaphragm materials that cover a variety of applications.

Yamada pumps utilize a Step Spool (S-Spool).

Yamada Global Series pumps do not have an independent pilot valve system (less parts) and consume less air versus the competition. Available with multiport options, these AODD pumps perform extremely well in continuous stop/start operations and provide exceptional suction lift.

Estimated delivery 2 weeks

[Curves & Specs](#)

ADDITIONAL INFORMATION

Weight	10 lbs
Dimensions	15 × 15 × 16 in
Connections	<u>1/2"FNPT</u>
Max GPM	<u>16.6 GPM</u>
Wetted Material	<u>PURE POLYPRO-SANTOPRENE-EPDM</u>

www.pfcstore.com - 763-425-7890 / 800-328-2350

Pure Polypro-Santoprene /EPDM Gasket

10 GPM @ 100 FTH / MAX 16.6 GPM

1/2 NPT Female

Max Temp 180°F

Maximum Dry Suction Lift: Rubber fitted pump capability: 13.5' - PTFE fitted pump capability: 11'

Replaces the ARO AODD Pump 660Sj