
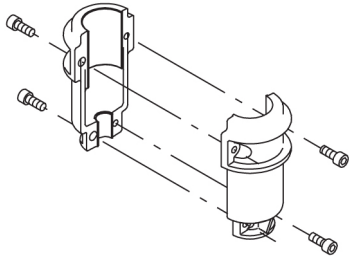


| Count | Description |
|-------|---|
| 1 | <p>CRN 155-3-2 A-G-A-V-HQQV</p>  <p>Product photo could vary from the actual product</p> <p>Product No.: 99145269</p> <p>Vertical, multistage centrifugal pump with inlet and outlet ports on same the level (inline). Pump materials in contact with the liquid are in high-grade stainless steel. The Grundfos cartridge shaft seal ensures high reliability, safe handling, and easy access and service. Power transmission is via a rigid split coupling. Pipe connection is via ANSI flanges.</p> <p>The pump is fitted with a 3-phase, fan-cooled asynchronous motor.</p> <p>Further product details</p> <p>Steel, cast iron and aluminium components have an epoxy-based coating made in a cathodic electro-deposition (CED) process. CED is a high-quality dip-painting process where an electrical field around the products ensures deposition of paint particles as a thin, well-controlled layer on the surface. An integral part of the process is a pretreatment. The entire process consists of these elements:</p> <ol style="list-style-type: none"> 1) Alkaline-based cleaning. 2) Zinc phosphating. 3) Cathodic electro-deposition. 4) Curing to a dry film thickness 18-22 my m. <p>The colour code for the finished product is NCS 9000/RAL 9005.</p> <p>Pump</p> <p>A long split coupling connects the pump and motor shaft. It is enclosed in the motor stool by means of two coupling guards. The long coupling makes it possible to replace the shaft seal without removing the motor from the pump.</p>  <p>The motor stool connects the pump head and motor. The pump head has a combined 1/2" priming plug and vent screw.</p> |



The pump is fitted with a balanced O-ring seal unit with a rigid torque-transmission system. This seal type is assembled in a cartridge unit which makes replacement safe and easy. Due to the balancing, this seal type is suitable for high-pressure applications. The cartridge construction also protects the pump shaft from possible wear from a dynamic O-ring between pump shaft and shaft seal.


Primary seal:

- Rotating seal ring material: silicon carbide (SiC)
- Stationary seat material: silicon carbide (SiC)

This material pairing is used where higher corrosion resistance is required. The high hardness of this material pairing offers good resistance against abrasive particles.

Secondary seal material: FKM (fluorocarbon rubber)


FKM has excellent resistance to oils and chemicals. Above 90 °C, FKM should only be used in media without water.



The shaft seal is screwed into the pump head.

The chambers and impellers are made of stainless-steel sheet. The chambers are provided with a PEEK neck ring offering improved sealing and high efficiency. The impellers have smooth surfaces, and the shape of the blades ensure a high efficiency.

The pump has a stainless-steel base mounted on a separate cast-iron base plate. The base and base plate are kept in position by the tension of the staybolts which hold the pump together. Both the inlet and the outlet side of the base have two pressure gauge tapings. The pump is secured to the foundation by four bolts through the base plate. The flanges are fastened to the base by means of locking rings.



Motor

The motor is a totally enclosed, fan-cooled motor with principal dimensions to IEC and DIN standards. The motor is flange-mounted with free-hole flange (FF).

Motor-mounting designation in accordance with IEC 60034-7: IM B 5 (Code I) / IM 3001 (Code II).

Electrical tolerances comply with IEC 60034.

The motor efficiency is classified as premium efficiency in accordance with EISA2007.

The motor does not incorporate motor protection and must be connected to a motor-protective circuit breaker which can be manually reset. The motor-protective circuit breaker must be set according to the rated current of the motor (I₁/1).

A variable speed drive makes adjustment of pump performance to any duty point possible. If the motor is to be connected to a variable speed drive, the pump must be ordered with an electrically insulated motor bearing.

| Count | Description |
|-------|---|
| | <p>Technical data</p> <p>Controls: Frequency converter: NONE</p> <p>Liquid: Pumped liquid: Water Liquid temperature range: -4 .. 194 °F Liquid temperature during operation: 68 °F Density: 62.29 lb/ft³</p> <p>Technical: Rated pump speed: 3548 rpm Rated flow: 820 US gpm Rated head: 300.5 ft Pump orientation: Vertical Shaft seal arrangement: Single Code for shaft seal: HQQV Curve tolerance: ISO9906:2012 3B</p> <p>Materials: Base: Stainless steel EN 1.4408 ASTM A351 CF8M Impeller: Stainless steel EN 1.4401 AISI 316 Bearing: WC/WC Support bearing: Graflon Material certified according to: European standards</p> <p>Installation: Maximum ambient temperature: 122 °F Maximum operating pressure: 232 psi Max pressure at stated temperature: 232 psi / 194 °F Type of connection: ANSI Size of suction port: 6 inch Size of outlet port: 6 inch Pressure rating for pipe connection: 150 lb Flange size for motor: 365TSC</p> <p>Electrical data: Motor standard: NEMA Motor type: Baldor IE Efficiency class: NEMA Premium / IE3 60Hz Rated power - P2: 75 HP Power (P2) required by pump: 75 HP Main frequency: 60 Hz Rated voltage: 3 x 230/460 V Service factor: 1.15 Rated current: 166/83 A Starting current: 511 % Cos phi - power factor: 0.87 Rated speed: 3550 rpm IE efficiency: IE3 94,5% Number of poles: 2 Enclosure class (IEC 34-5): 54 Dust/Splashing Insulation class (IEC 85): F</p> |



Company name:

Created by:


Phone:

Date:




3/22/2019

| Count | Description |
|-------|---|
| | Others: Net weight: 1330 lb Gross weight: 1650 lb Shipping volume: 71.9 ft ³ Thrust handling device: N Approvals: NSF/ANSI 372 |

99145269 CRN 155-3-2 A-G-A-V-HQQV 60 Hz

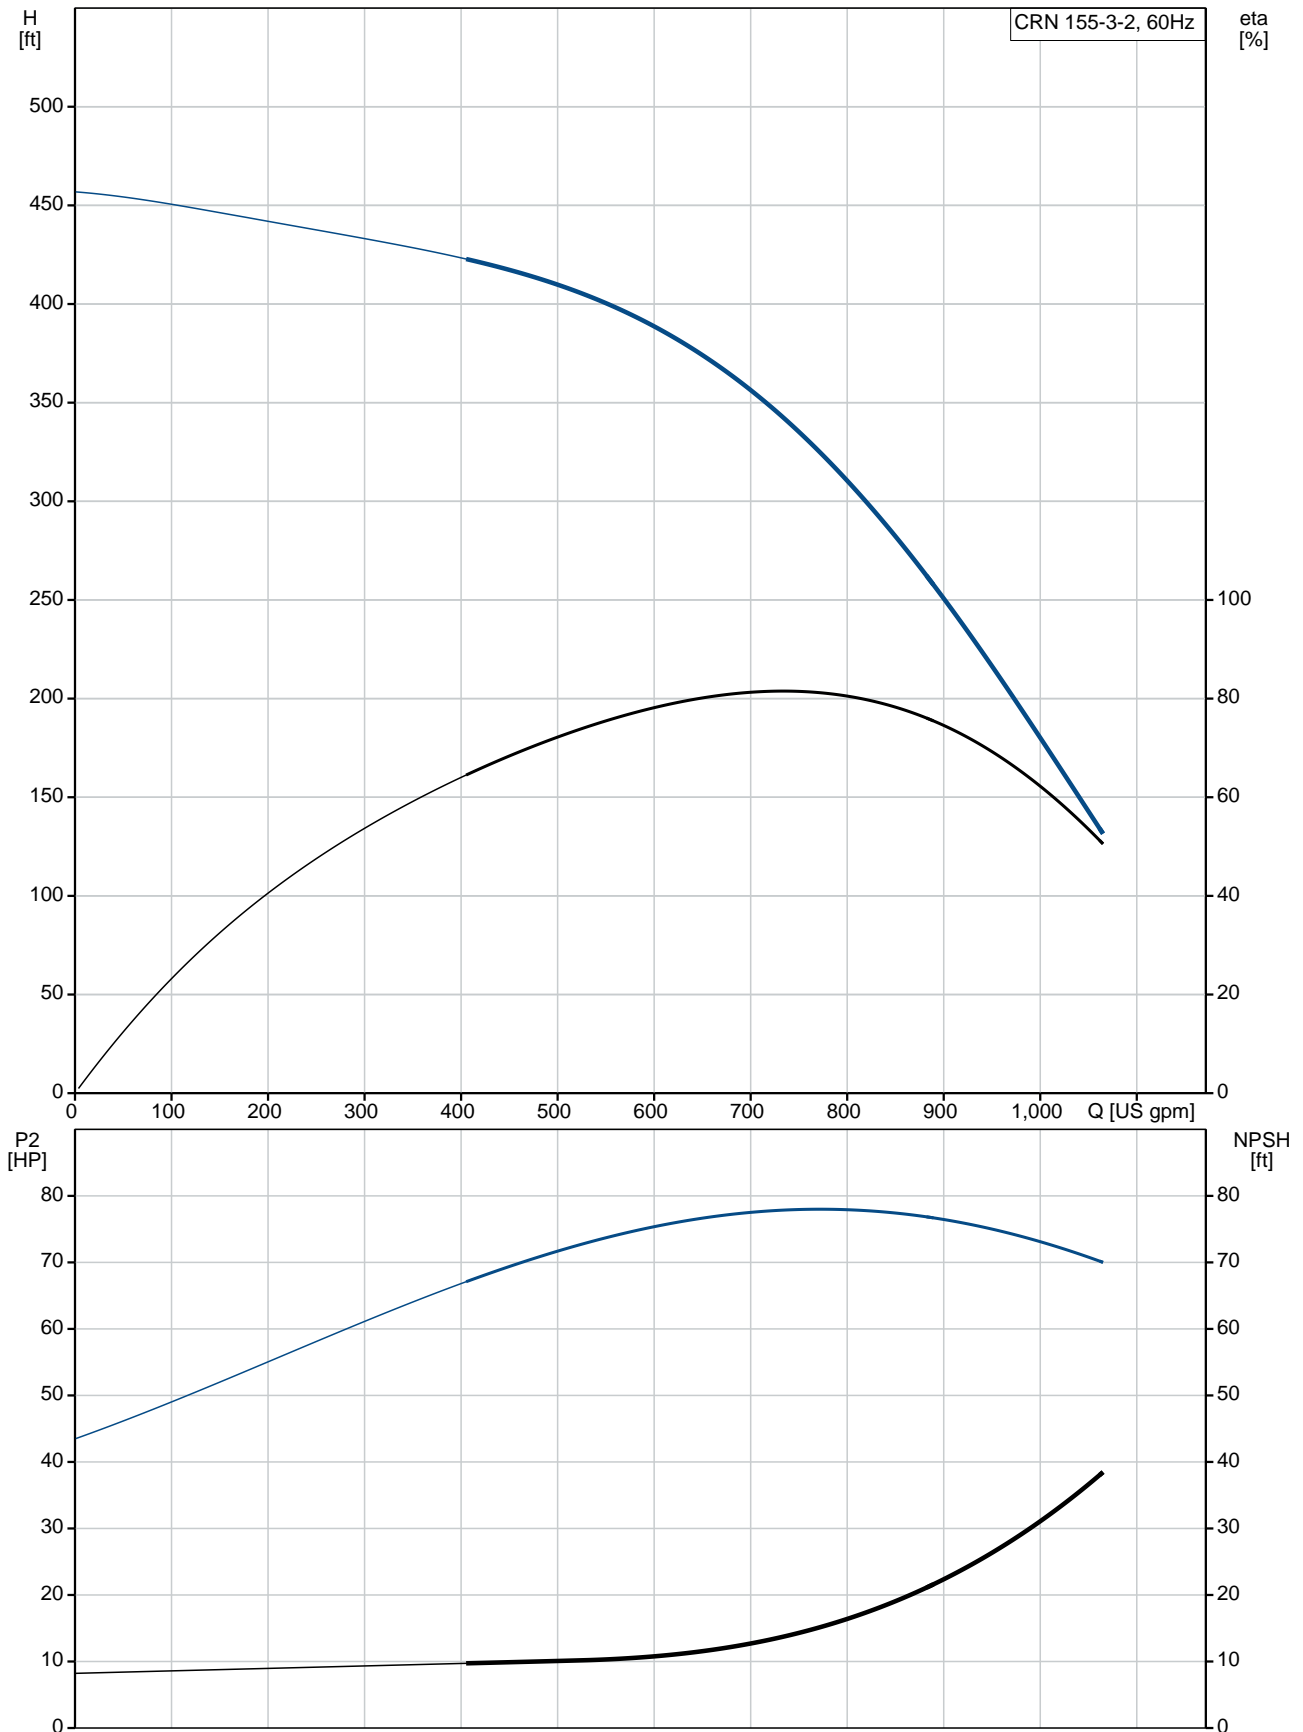

| Description | Value |
|---------------------------------------|--|
| General information: | |
| Product name: | CRN 155-3-2 A-G-A-V-HQQV |
| Product No.: | 99145269 |
| EAN: | 5712607594534 |
| Technical: | |
| Rated pump speed: | 3548 rpm |
| Rated flow: | 820 US gpm |
| Rated head: | 300.5 ft |
| Head max: | 457.4 ft |
| Stages: | 3 |
| Impellers: | 3 |
| Number of reduced-diameter impellers: | 2 |
| Low NPSH: | N |
| Pump orientation: | Vertical |
| Shaft seal arrangement: | Single |
| Code for shaft seal: | HQQV |
| Curve tolerance: | ISO9906:2012 3B |
| Pump version: | A |
| Model: | A |
| Cooling: | TEFC |
| Materials: | |
| Base: | Stainless steel EN 1.4408 ASTM A351 CF8M |
| Impeller: | Stainless steel EN 1.4401 AISI 316 |
| Material code: | A |
| Code for rubber: | V |
| Bearing: | WC/WC |
| Support bearing: | Graflon |
| Material certified according to: | European standards |
| Installation: | |
| Maximum ambient temperature: | 122 °F |
| Maximum operating pressure: | 232 psi |
| Max pressure at stated temperature: | 232 psi / 194 °F |
| Type of connection: | ANSI |
| Size of suction port: | 6 inch |
| Size of outlet port: | 6 inch |
| Pressure rating for pipe connection: | 150 lb |
| Flange size for motor: | 365TSC |
| Connect code: | G </td |
| Liquid: | |
| Pumped liquid: | Water |
| Liquid temperature range: | -4 .. 194 °F |
| Liquid temperature during operation: | 68 °F |
| Density: | 62.29 lb/ft³ |
| Electrical data: | |
| Motor standard: | NEMA |
| Motor type: | Baldor |
| IE Efficiency class: | NEMA Premium / IE3 60Hz |
| Rated power - P2: | 75 HP |
| Power (P2) required by pump: | 75 HP |
| Main frequency: | 60 Hz |
| Rated voltage: | 3 x 230/460 V |
| Service factor: | 1.15 |
| Rated current: | 166/83 A |

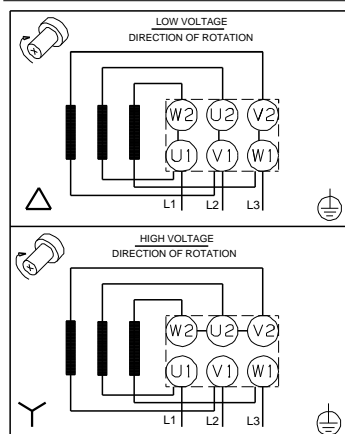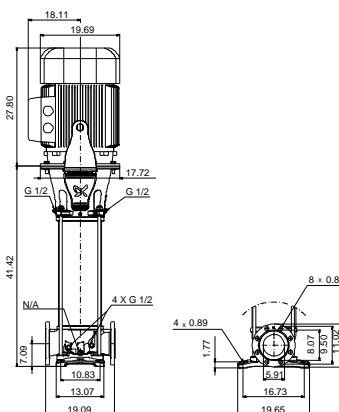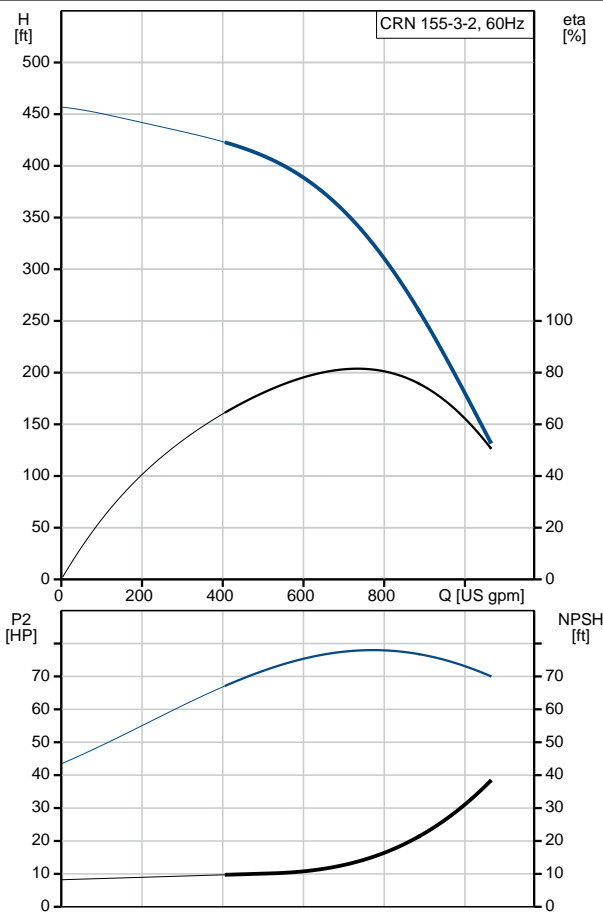



Company name:

Created by:


Phone:

Date:

3/22/2019


| Description | Value |
|-----------------------------|-------------------|
| Starting current: | 511 % |
| Load current: | 190/95 A |
| Cos phi - power factor: | 0.87 |
| Rated speed: | 3550 rpm |
| IE efficiency: | IE3 94,5% |
| Number of poles: | 2 |
| Enclosure class (IEC 34-5): | 54 Dust/Splashing |
| Insulation class (IEC 85): | F |
| Motor protection: | NONE |
| Motor Number: | 84Z04434 |
| Controls: | |
| Frequency converter: | NONE |
| Others: | |
| Net weight: | 1330 lb |
| Gross weight: | 1650 lb |
| Shipping volume: | 71.9 ft³ |
| Thrust handling device: | N |
| Approvals: | NSF/ANSI 372 |

99145269 CRN 155-3-2 A-G-A-V-HQQV 60 Hz

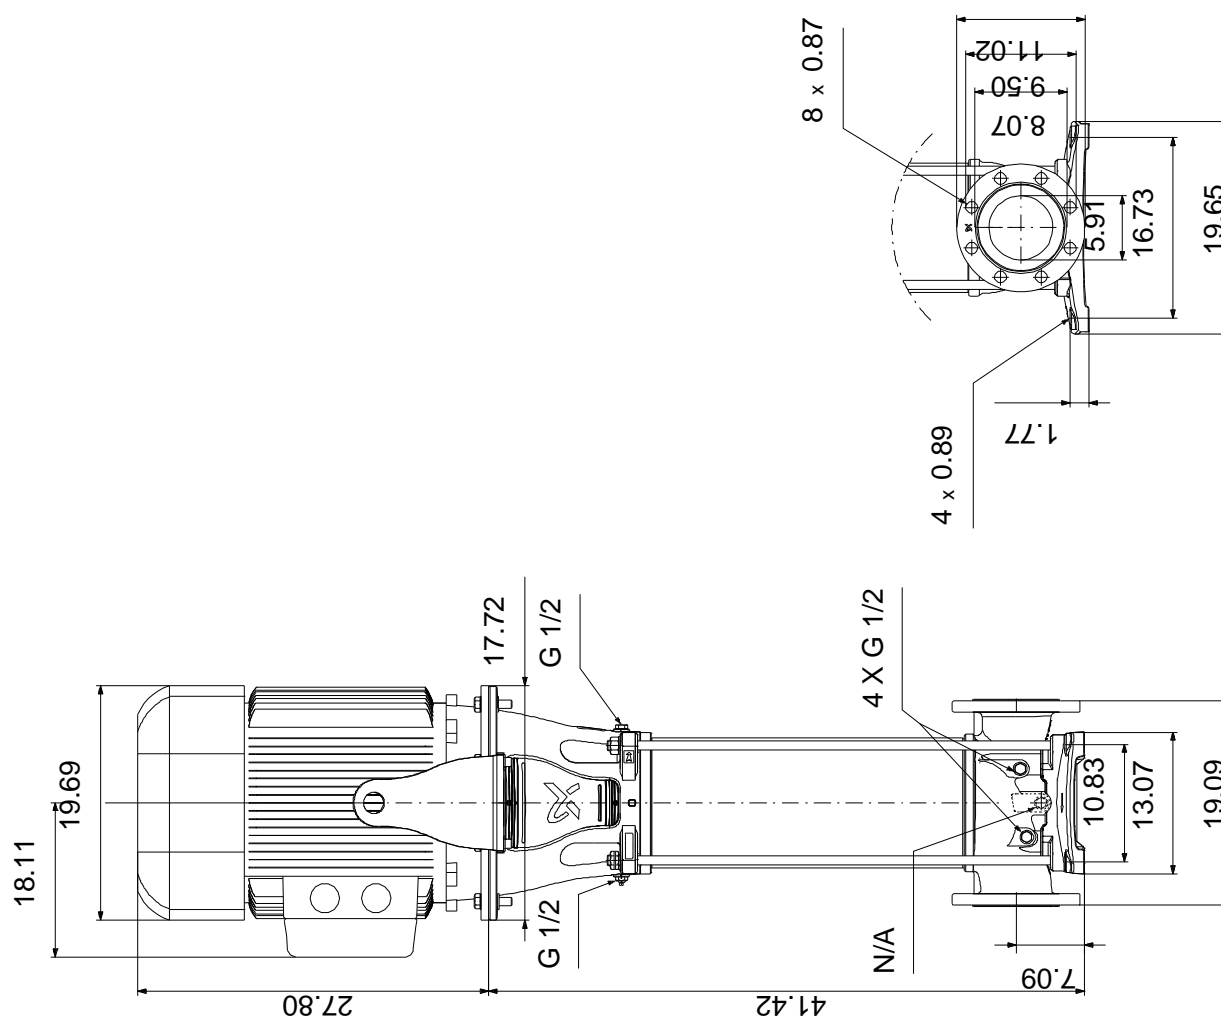

Note! All units are in [mm] unless otherwise stated.
Disclaimer: This simplified dimensional drawing does not show all details.

99145269 CRN 155-3-2 A-G-A-V-HQQV 60 Hz

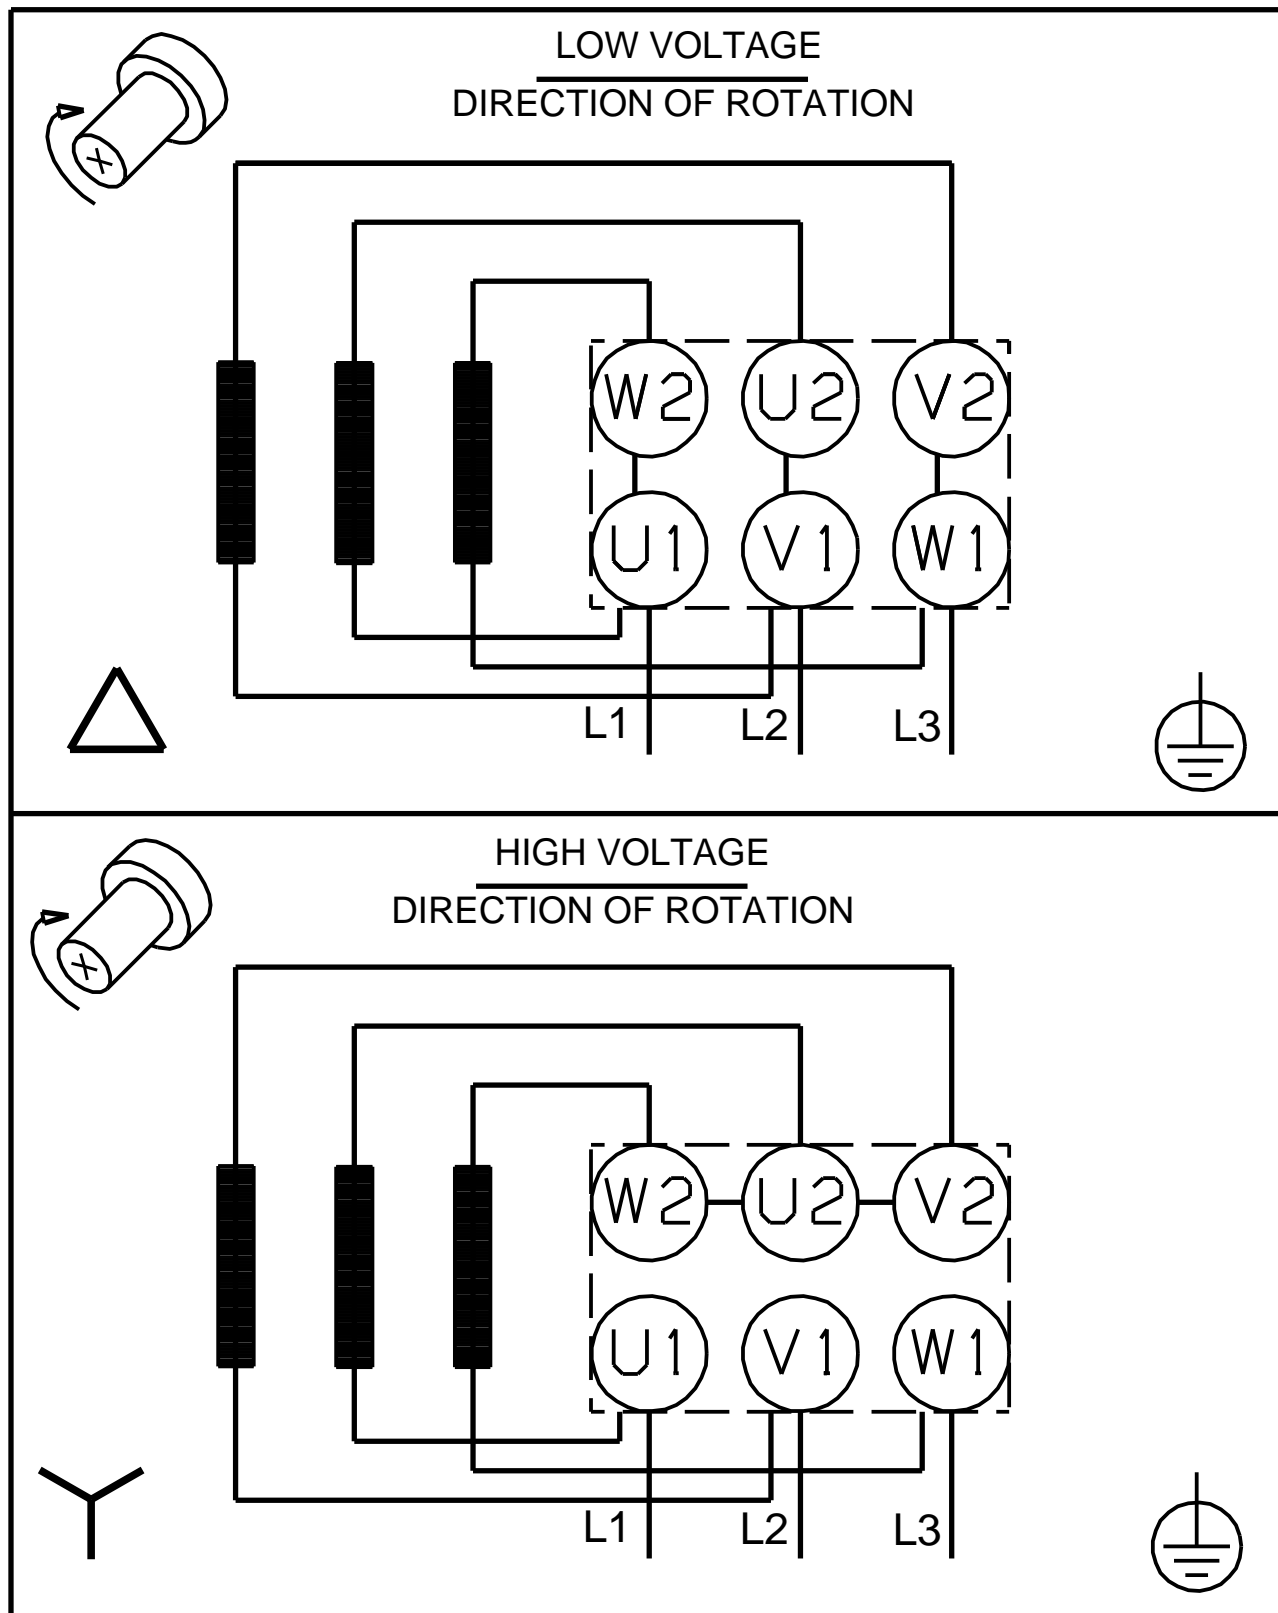

All units are [mm] unless otherwise presented.