


Customer	Date 05.03.2019
Contact	Project
Phone number	Project no.
Email	

1ST1F2B4

Operating Data		End Suction Pumps	
Pump type		Fluid	Water
No. of pumps / Reserve	1 / 0	Operating temperature t A	°F 39.2
Nominal flow	US g.p.m. 0	pH-value at t A	7
Nominal head	ft 0	Density at t A	lb/ft³ 62.4
Static head	ft 0	Kin. viscosity at t A	ft²/s 1.689E-5
Inlet pressure	psi 0	Vapor pressure at t A	psi 14.5
Environmental temperature	°F 68	Solids	0
Available system NPSH	ft 0	Altitude	ft 0

Pump Data			
Make	Goulds Water Technology	Nominal	US g.p.m. ()
Speed	rpm 3500	Flow	Max- US g.p.m. 48.5
Number of stages	1		Min- US g.p.m.
Max. casing pressure	psi		Nominal ft
Max. working pressure	psi 58.8	Head	at Qmax ft 75.4
Head H(Q=0)	ft 140		at Qmin ft 135.7
Weight	lb On demand	Shaft power	hp ()
	Max. inch 6 1/8	Max. shaft power	hp 1.9
Impeller R	designed inch 5 3/4	Efficiency	%
	Min. inch 4 7/16	NPSH 3%2525	ft

Shaft Seal	
Type 21 NPE	John Crane
NPE Mechanical Seal	
1 - Rotating Face	Carbon
2 - Stationary Face	Silicon Carbide
3 - Elastomers	Viton
4 - Metal Components	AlSI 316 SS

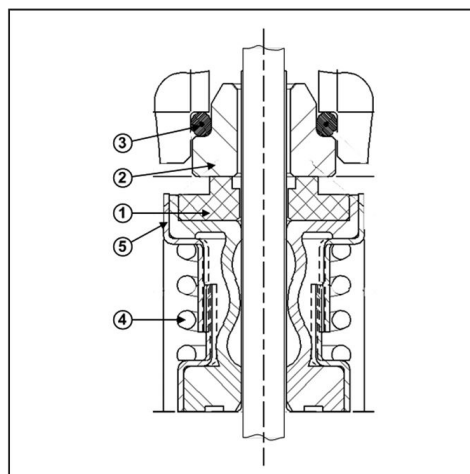

Motor Data			
Manufacturer	Bluffton	Electric voltage	208 V
Specific design	3ph ODP	Speed	3500 rpm
Type	E07C32E1EB4G	Frame size	56J
Rated power	1.5 hp	Insulation class	B
		Colour	RAL 5010
		Electric current	0 A
		Degree of protection	IP 55

Remarks:

Customer	Date
Contact	05.03.2019
Phone number	Project
Email	Project no.

1ST1F2B4

Pump Materials

100-Casing	AISI 316L SS
101-Impeller	AISI 316L SS
108-Motor adapter	AISI 316L SS
108-Motor adapter seal	AISI 316L SS
vent/flush	BUNA-N
123-Deflector	AISI 316L SS
184-Seal housing	AISI 316L SS
184-Seal housing seal	AISI 316L SS
vent/flush	AISI 316L SS
347-Guide vane	Viton
370-Seal in head/covers,	AISI 410 SS
casing	Plated Steel
371-Bolts, motor	AISI 316L SS
400-Down and vent plug casing	Viton
400-Down and vent plug casing	Viton
plug	-
56J-NEU casing	
56J-NEU casing, 56J	
flange	

Remarks:

Customer	Date	05.03.2019
Contact	Project	
Phone number	Project no.	
Email		

1ST1F2B4


Hydraulic Data

Operating Data Specification		Hydraulic data (duty point)		Impeller design	
Flow	0 US g.p.m.	Flow		Impeller R	5 ³ / ₄ "
Head	0 ft	Head		Frequency	60 Hz
Static head	0 ft			Speed	3500 rpm

Power data referred to:

Water [100%] ; 39.2°F; 62.4lb/ft³; 1.69E-5ft²/s


Performance according to ISO 9906 - Annex A

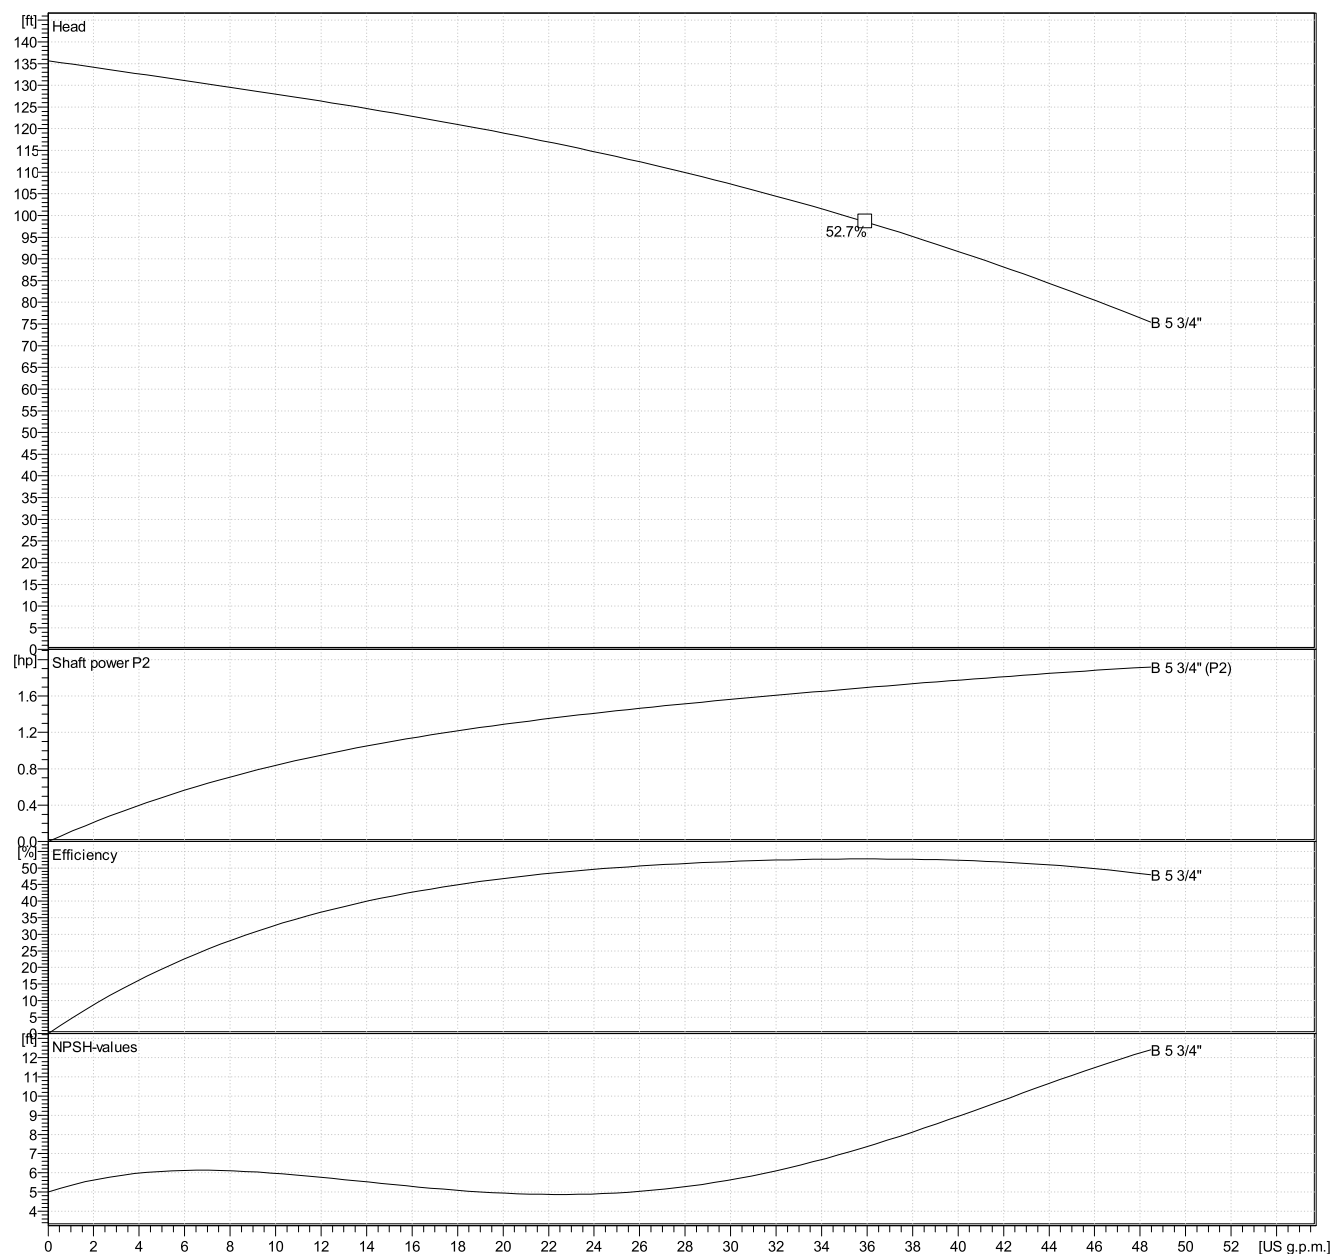

Customer	Date	05.03.2019
Contact	Project	
Phone number	Project no.	
Email		

1ST1F2B4

Drawing

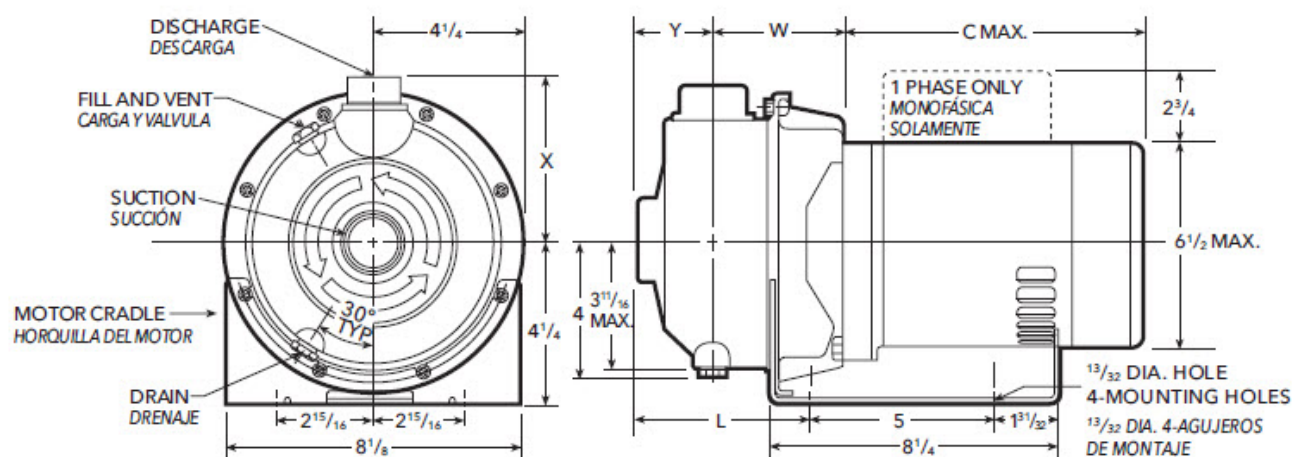

Dimensions inch

C. Max	$11\frac{15}{16}$					Weight
Discharge	1					On demand [Ⓟ]
L	$4\frac{9}{16}$					
Suction	$1\frac{1}{4}$					
W	$3\frac{5}{16}$					
X	$4\frac{3}{8}$					
Y	2					