






| Count | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1     | <p><b>CRN 1S-7A-P-A-V-HQQV</b></p>  <p>Product photo could vary from the actual product</p> <p>Product No.: <a href="#">96081696</a></p> <p>Vertical, non-self-priming, multistage, in-line, centrifugal pump for installation in pipe systems and mounting on a foundation.</p> <p>The pump has the following characteristics:</p> <ul style="list-style-type: none"> <li>- Impellers, intermediate chambers and outer sleeve are made of</li> <li>- Pump head cover and base are made of</li> <li>- The shaft seal has assembly length according to EN 12756.</li> <li>- Power transmission is via cast iron split coupling.</li> </ul> <p>flanges/couplings.</p> <p>The motor is a 3-phase AC motor.</p> <p><b>Controls:</b></p> <p>Frequency converter: NONE</p> <p><b>Liquid:</b></p> <p>Pumped liquid: Water</p> <p>Liquid temperature range: -4 .. 194 °F</p> <p>Selected liquid temperature: 68 °F</p> <p>Density: 62.29 lb/ft³</p> <p><b>Technical:</b></p> <p>Rated pump speed: 3485 rpm</p> <p>Rated flow: 4.84 US gpm</p> <p>Rated head: 131.9 ft</p> <p>Pump orientation: Vertical</p> <p>Shaft seal arrangement: Single</p> <p>Code for shaft seal: HQQV</p> <p>Approvals on nameplate: CURUS</p> <p>Curve tolerance: ISO9906:2012 3B</p> <p><b>Materials:</b></p> <p>Base: Stainless steel<br/>EN 1.4408<br/>AISI 316</p> <p>Impeller: Stainless steel<br/>EN 1.4401<br/>AISI 316</p> <p>Bearing: SIC</p> <p><b>Installation:</b></p> <p>Maximum ambient temperature: 104 °F</p> <p>Maximum operating pressure: 362.59 psi</p> <p>Max pressure at stated temperature: 363 psi / 194 °F<br/>363 psi / -4 °F</p> <p>Type of connection: PJE</p> |

| Count | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       | <p>Size of inlet connection: DN 32</p> <p>Size of suction port: 1 1/4 inch</p> <p>Size of outlet connection: DN 32</p> <p>Size of outlet port: 1 1/4 inch</p> <p>Pressure rating for pipe connection: PN 50</p> <p>Flange size for motor: 56C</p> <p><b>Electrical data:</b></p> <p>Motor standard: NEMA</p> <p>Motor type: 71AB</p> <p>Rated power - P2: 0.5 HP</p> <p>Power (P2) required by pump: 0.5 HP</p> <p>Main frequency: 60 Hz</p> <p>Rated voltage: 3 x 208-230YY/460Y V</p> <p>Service factor: 1.25</p> <p>Rated current: 1,64-1,55/0,78 A</p> <p>Starting current: 590-650 %</p> <p>Cos phi - power factor: 0.84-0.78</p> <p>Rated speed: 3430-3460 rpm</p> <p>Motor efficiency at full load: 78.5 %</p> <p>Number of poles: 2</p> <p>Enclosure class (IEC 34-5): 55 Dust/Jetting</p> <p>Insulation class (IEC 85): F</p> <p>Motor Number: 85900701</p> <p><b>Others:</b></p> <p>Net weight: 45.2 lb</p> <p>Gross weight: 56.2 lb</p> <p>Shipping volume: 4.94 ft<sup>3</sup></p> <p>Country of origin: US</p> <p>Custom tariff no.: 8413.70.2040</p> |

**96081696 CRN 1S-7A-P-A-V-HQQV 60 Hz**

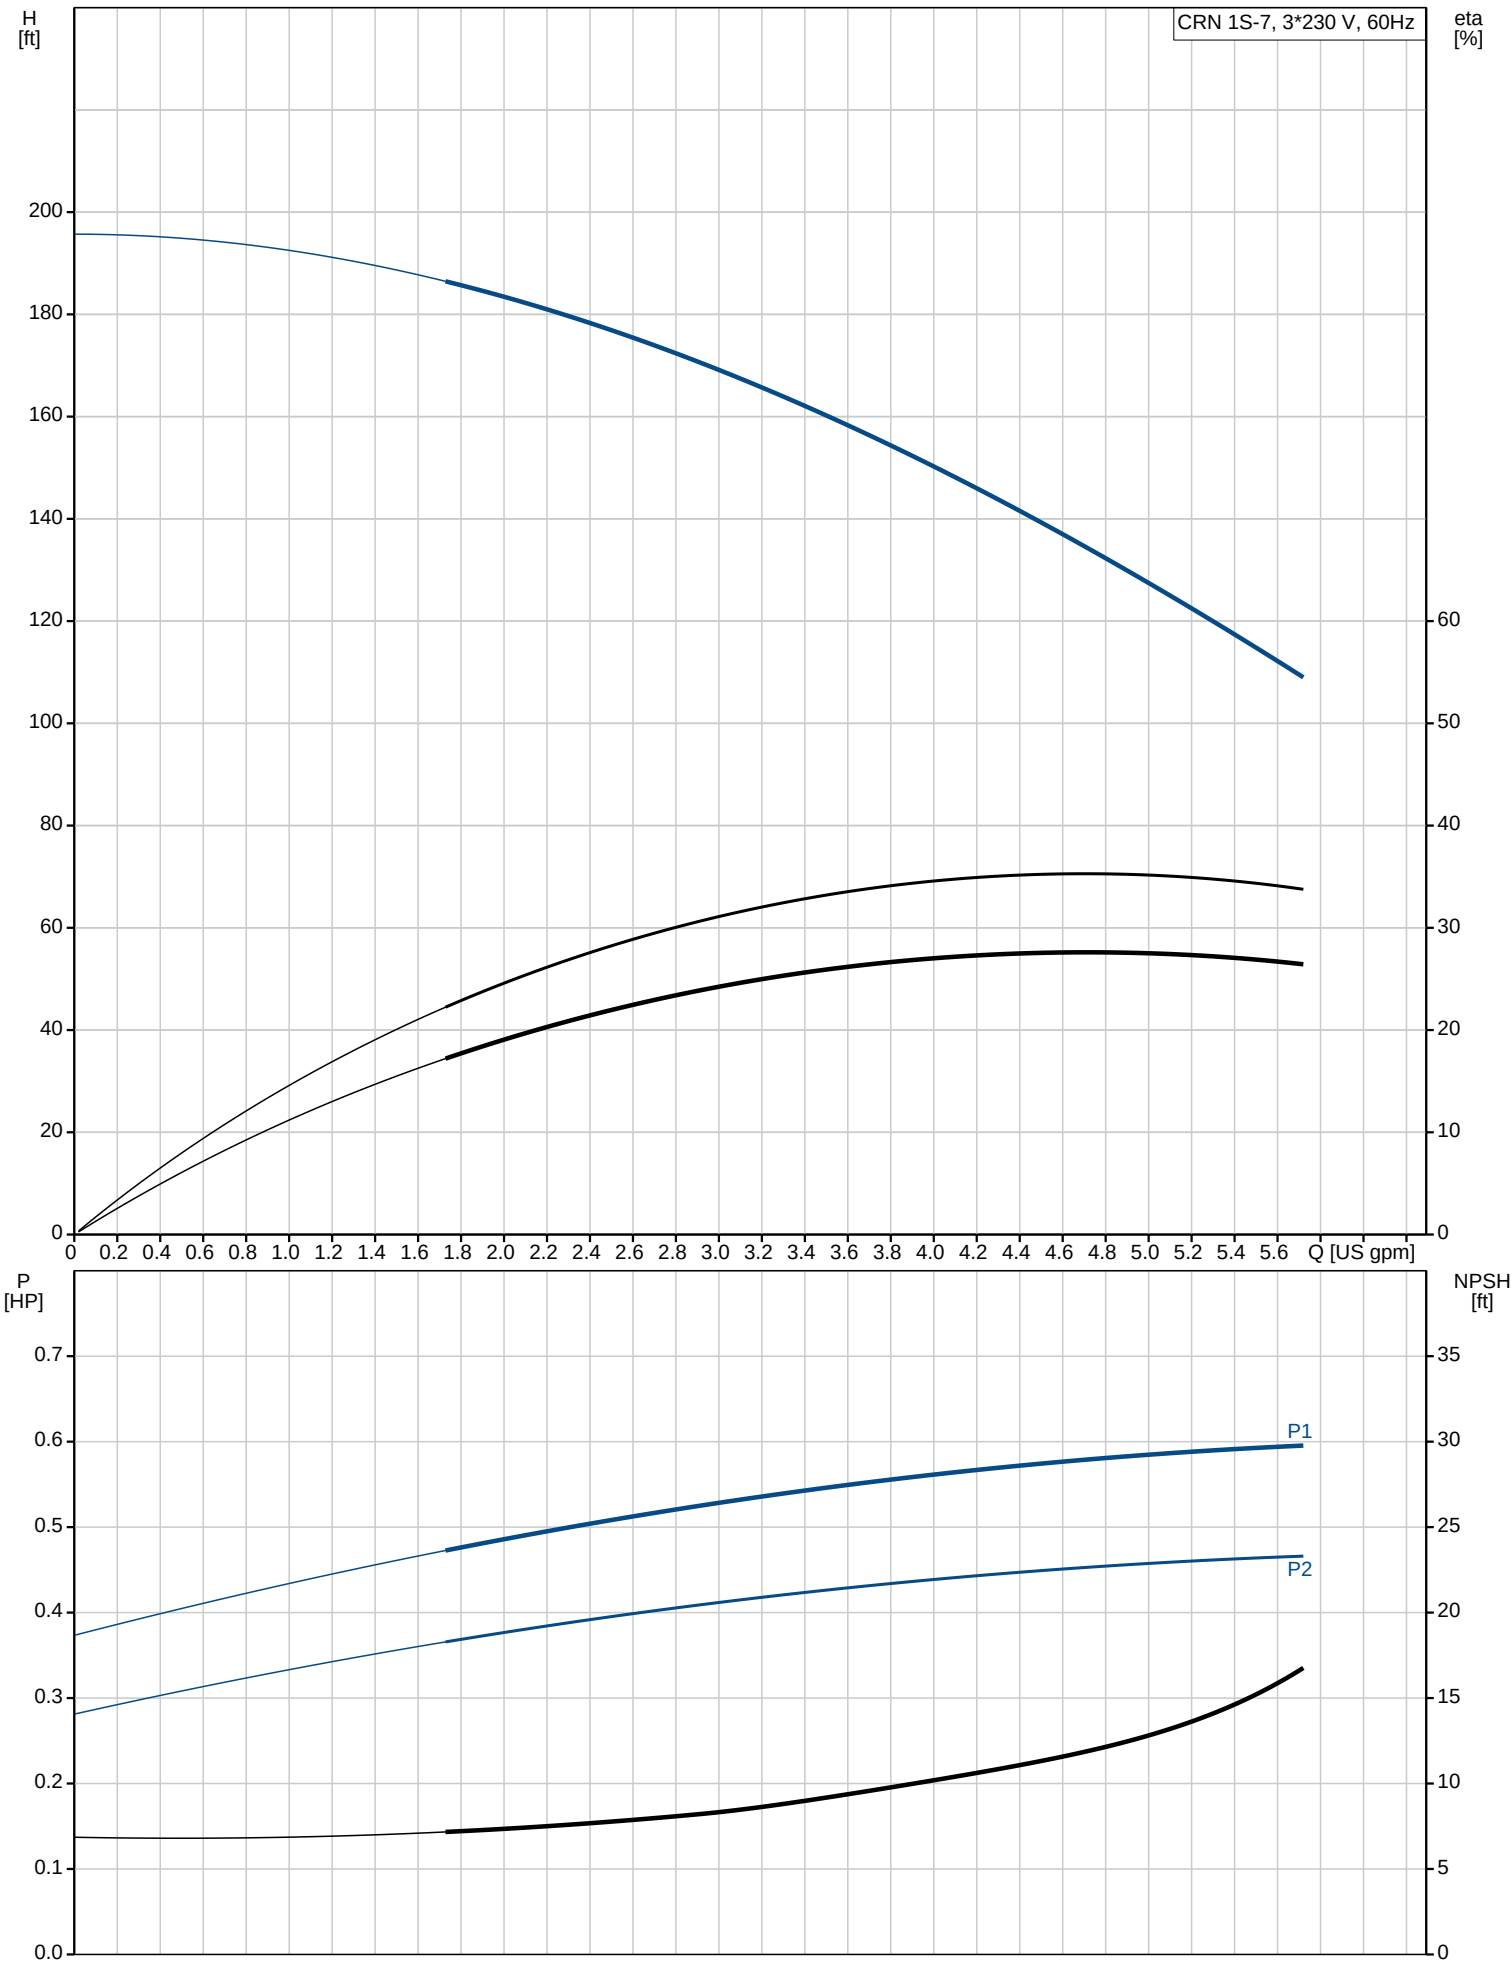

| Description                           | Value                    |
|---------------------------------------|--------------------------|
| <b>General information:</b>           |                          |
| Product name:                         | CRN 1S-7A-P-A-V-HQQV     |
| Product No.:                          | 96081696                 |
| EAN:                                  | 5700395161403            |
| <b>Technical:</b>                     |                          |
| Rated pump speed:                     | 3485 rpm                 |
| Rated flow:                           | 4.84 US gpm              |
| Rated head:                           | 131.9 ft                 |
| Head max:                             | 195.5 ft                 |
| Stages:                               | 7                        |
| Impellers:                            | 7                        |
| Number of reduced-diameter impellers: | 0                        |
| Low NPSH:                             | N                        |
| Pump orientation:                     | Vertical                 |
| Shaft seal arrangement:               | Single                   |
| Code for shaft seal:                  | HQQV                     |
| Approvals on nameplate:               | CURUS                    |
| Curve tolerance:                      | ISO9906:2012 3B          |
| Pump version:                         | A                        |
| Model:                                | A                        |
| Cooling:                              | TEFC                     |
| <b>Materials:</b>                     |                          |
| Base:                                 | Stainless steel          |
|                                       | EN 1.4408                |
|                                       | AISI 316                 |
| Impeller:                             | Stainless steel          |
|                                       | EN 1.4401                |
|                                       | AISI 316                 |
| Material code:                        | A                        |
| Code for rubber:                      | V                        |
| Bearing:                              | SIC                      |
| <b>Installation:</b>                  |                          |
| Maximum ambient temperature:          | 104 °F                   |
| Maximum operating pressure:           | 362.59 psi               |
| Max pressure at stated temperature:   | 363 psi / 194 °F         |
|                                       | 363 psi / -4 °F          |
| Type of connection:                   | PJE                      |
| Size of inlet connection:             | DN 32                    |
| Size of suction port:                 | 1 1/4 inch               |
| Size of outlet connection:            | DN 32                    |
| Size of outlet port:                  | 1 1/4 inch               |
| Pressure rating for pipe connection:  | PN 50                    |
| Flange size for motor:                | 56C                      |
| Connect code:                         | P                        |
| <b>Liquid:</b>                        |                          |
| Pumped liquid:                        | Water                    |
| Liquid temperature range:             | -4 .. 194 °F             |
| Selected liquid temperature:          | 68 °F                    |
| Density:                              | 62.29 lb/ft <sup>3</sup> |
| <b>Electrical data:</b>               |                          |
| Motor standard:                       | NEMA                     |
| Motor type:                           | 71AB                     |
| Rated power - P2:                     | 0.5 HP                   |
| Power (P2) required by pump:          | 0.5 HP                   |
| Main frequency:                       | 60 Hz                    |
| Rated voltage:                        | 3 x 208-230YY/460Y V     |
| Service factor:                       | 1.25                     |
| Rated current:                        | 1,64-1,55/0,78 A         |
| Starting current:                     | 590-650 %                |
| Load current:                         | 2,0-1,9/0,95 A           |
| Cos phi - power factor:               | 0.84-0.78                |
| Rated speed:                          | 3430-3460 rpm            |
| Motor efficiency at full load:        | 78.5 %                   |
| Number of poles:                      | 2                        |
| Enclosure class (IEC 34-5):           | 55 Dust/Jetting          |
| Insulation class (IEC 85):            | F                        |

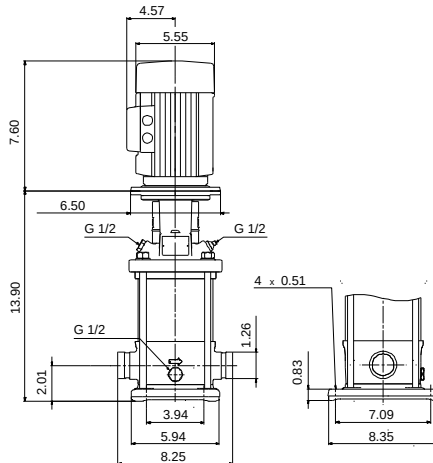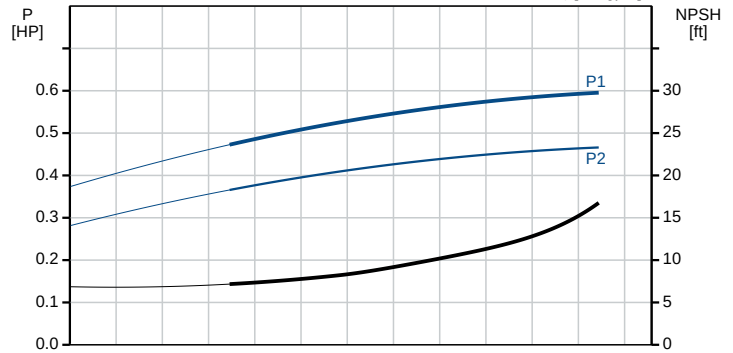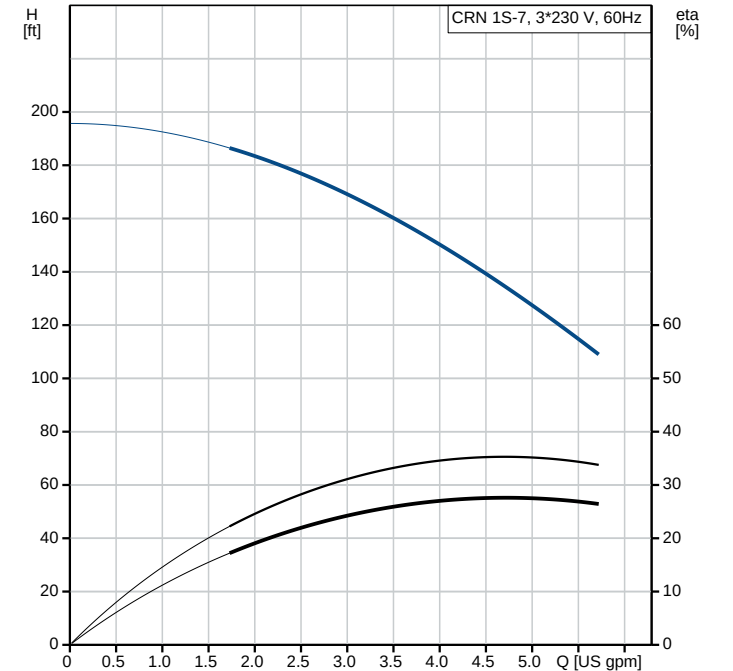




Company name:  
Created by:  
Phone:



Date: 4/25/2019

| Description          | Value        |
|----------------------|--------------|
| Motor protection:    | NONE         |
| Motor Number:        | 85900701     |
| Controls:            |              |
| Frequency converter: | NONE         |
| Others:              |              |
| Net weight:          | 45.2 lb      |
| Gross weight:        | 56.2 lb      |
| Shipping volume:     | 4.94 ft³     |
| Country of origin:   | US           |
| Custom tariff no.:   | 8413.70.2040 |


**96081696 CRN 1S-7A-P-A-V-HQQV 60 Hz**

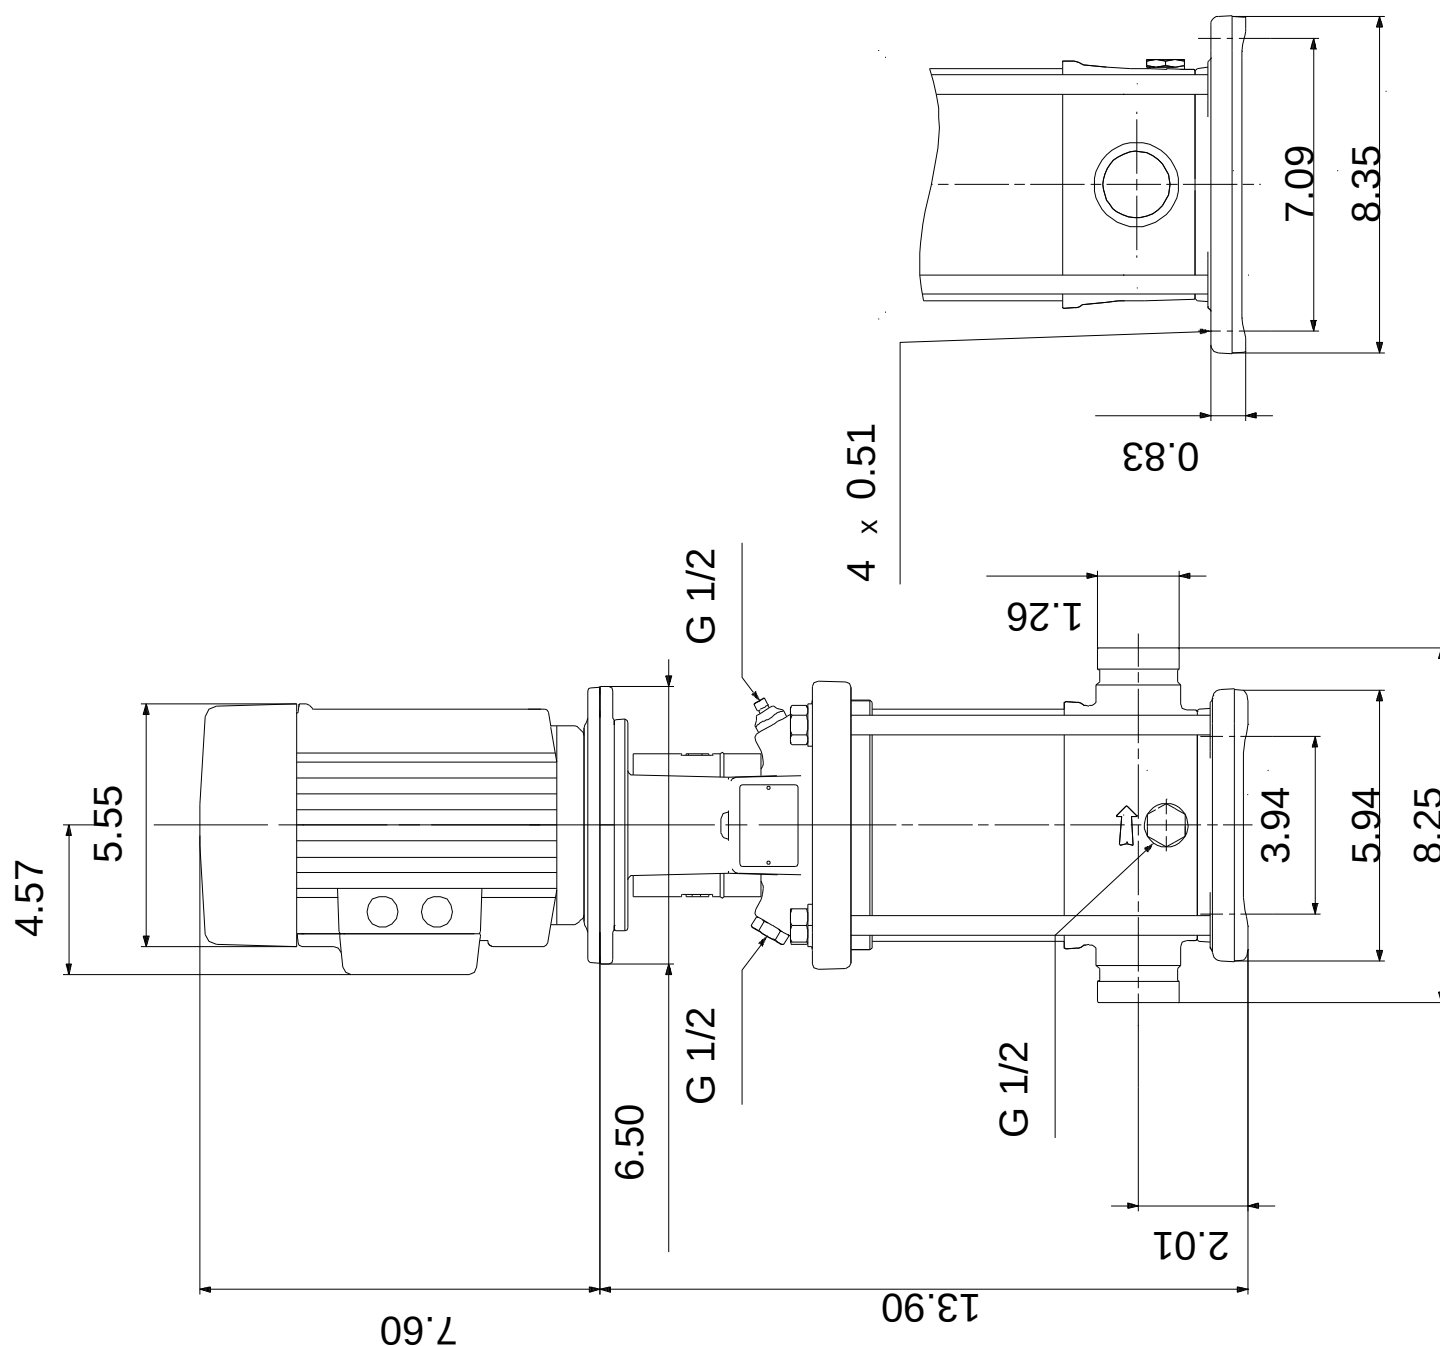

96081696 CRN 1S-7A-P-A-V-HQQV 60 Hz
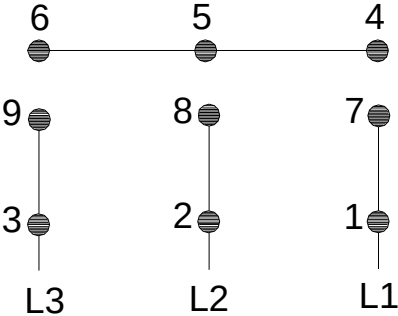
|                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <b>WARNING</b>                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                      |
| <p>MOTOR MUST BE GROUNDED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND LOCAL CODES BY TRAINED PERSONNEL TO PREVENT SERIOUS ELECTRICAL SHOCKS.</p> <p>TO SERVICE MOTOR, DISCONNECT POWER SOURCE FROM MOTOR AND ANY ACCESSORY DEVICES AND ALLOW MOTOR TO COME TO A COMPLETE STAND STILL.</p>                                                                                                                                           |                                                                                                                                                                                                                      |
| <p style="text-align: center;"><b>LOW VOLTAGE</b><br/>60Hz. 208-230V</p>                                                                                                                                                                                                                                                                                 | <p style="text-align: center;"><b>HIGH VOLTAGE</b><br/>60Hz: 460V<br/>50Hz: 400V</p>  <p style="text-align: right;">96553852</p> |
| <p>INTERCHANGE ANY TWO LINE WIRES TO REVERSE ROTATION</p>                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                      |
| <p>THERMOSTAT LEADS (WHEN PROVIDED)</p> <div style="display: flex; justify-content: flex-end; align-items: center;"><div style="width: 20px; height: 10px; background-color: black; border-radius: 5px; margin-right: 5px;"></div>J</div> <div style="display: flex; justify-content: flex-end; align-items: center;"><div style="width: 20px; height: 10px; background-color: black; border-radius: 5px; margin-right: 5px;"></div>J</div> |                                                                                                                                                                                                                      |

( TM069451 for SMCR standard)

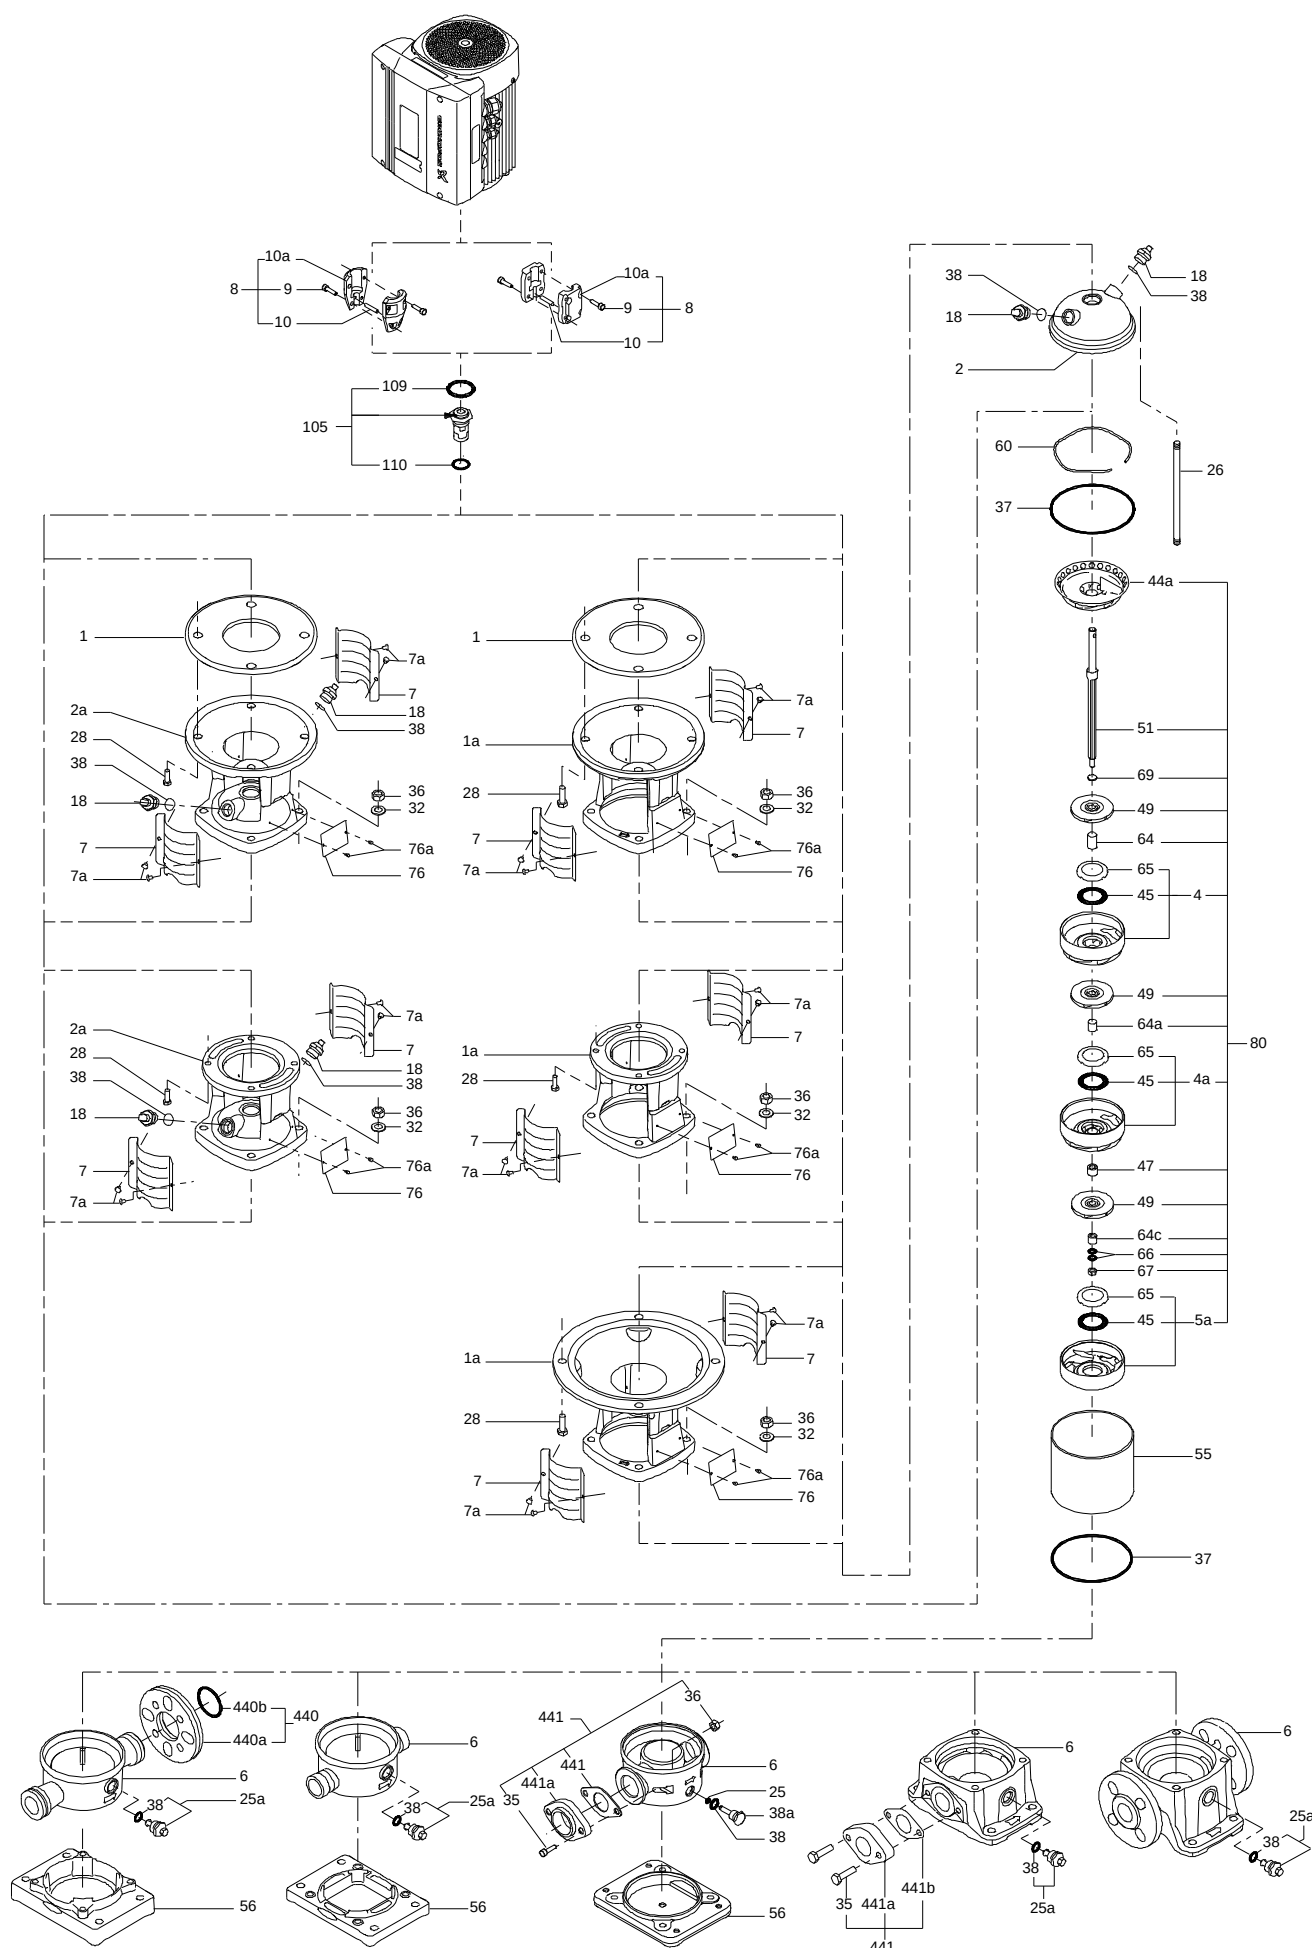



**Service parts CRN 1S-7, Prod number 96081696**
**Produced After 0503 (production year and week number)**

| Position | Description               | Annotation | Classification data   | Part No. | Count | Unit |
|----------|---------------------------|------------|-----------------------|----------|-------|------|
| - 80     | Kit, chamber stack        |            |                       | 96479083 | 1     | pcs  |
| - 4a     | Chamber w. bearing cpl.   |            |                       |          | 1     |      |
| 4a       | Intermediate chamber      |            |                       |          |       |      |
| 45       | Neck ring                 |            |                       |          |       |      |
| 65       | Neck ring retainer        |            |                       |          |       |      |
| - 4      | Chamber cpl.              |            |                       |          | 5     |      |
| 4a       | Intermediate chamber      |            |                       |          |       |      |
| 45       | Neck ring                 |            |                       |          |       |      |
| 65       | Neck ring retainer        |            |                       |          |       |      |
| - 5a     | Chamber cpl.              |            |                       |          | 1     |      |
| 4a       | Intermediate chamber      |            |                       |          |       |      |
| 45       | Neck ring                 |            |                       |          |       |      |
| 65       | Neck ring retainer        |            |                       |          |       |      |
| - 44a    | Guide vane                |            |                       |          | 1     |      |
|          | Plate                     |            |                       |          |       |      |
| 50       | Top plate                 |            |                       |          |       |      |
| 47       | Bearing ring, rotating    |            |                       |          | 1     |      |
| - 49     | Impeller cpl.             |            |                       |          | 7     |      |
| 49       | Impeller                  |            |                       |          |       |      |
| - 51     | Shaft, spline, cpl.       |            |                       |          | 1     |      |
|          | Shaft                     |            |                       |          |       |      |
| 62       | Stop ring                 |            |                       |          |       |      |
| 64d      | Spacing pipe              |            | Inner diameter: 12,85 |          | 1     |      |
|          |                           |            | Outer diameter: 15,85 |          |       |      |
|          |                           |            | Length: 4,50          |          |       |      |
| 64c      | Clamp, splined            |            | Inner diameter: 8,5   |          | 1     |      |
|          |                           |            | Outer diameter: 15    |          |       |      |
| 64a      | Spacing pipe              |            |                       |          | 5     |      |
| 66       | Wedge lock washer         |            |                       |          | 1     |      |
| 67       | Lock nut                  |            | Thread: M8            |          | 1     |      |
| -        | Kit, coupling             |            |                       | 00415314 | 1     | pcs  |
| 9        | Hex socket head cap screw |            | Designation: DIN 912  |          | 4     |      |
|          |                           |            | Length: 20            |          |       |      |
|          |                           |            | Thread: M6            |          |       |      |
| 10a      | Coupling half             |            |                       |          | 2     |      |
| 10       | Shaft pin                 |            | Diameter: 5           |          | 1     |      |
|          |                           |            | Length: 26            |          |       |      |
| -        | Kit, coupling guard       |            |                       | 96505130 | 1     | pcs  |
| 7.a      | Combi Slot Torx screw     |            |                       |          | 4     |      |
| 7        | Coupling guard            |            |                       |          | 2     |      |
| -        | Kit, O-rings              |            | Rubber type: FKM      | 96455091 | 1     | pcs  |
| 37       | O-ring                    |            | Diameter: 137,5       |          | 2     |      |
|          |                           |            | Material type: FKM    |          |       |      |
|          |                           |            | Thickness: 3,3        |          |       |      |
| 38       | O-ring                    |            | Diameter: 16,3        |          | 1     |      |
|          |                           |            | Material type: FKM    |          |       |      |
|          |                           |            | Thickness: 2,4        |          |       |      |
| 38       | O-ring                    |            | Diameter: 16,3        |          | 2     |      |
|          |                           |            | Material type: FKM    |          |       |      |
|          |                           |            | Thickness: 2,4        |          |       |      |
| 109      | O-ring                    |            | Diameter: 22,00       |          | 1     |      |
|          |                           |            | Material type: FKM    |          |       |      |
|          |                           |            | Thickness: 2,75       |          |       |      |
| -        | Kit, plug                 |            |                       | 96511103 | 1     | pcs  |
| - 18     | Air vent screw            |            |                       |          | 1     |      |
|          | Spindle                   |            |                       |          |       |      |
|          | Plug                      |            |                       |          |       |      |
| 23b      | Spindle                   |            |                       |          | 1     |      |
| - 25a    | Drain plug                |            |                       |          | 1     |      |
| 25a      | Pipe plug                 |            |                       |          |       |      |
| 25       | Drain plug                |            |                       |          |       |      |

| Position | Description                   | Annotation | Classification data            | Part No. | Count | Unit |
|----------|-------------------------------|------------|--------------------------------|----------|-------|------|
| 25       | Plug                          |            |                                |          | 1     |      |
| 38       | O-ring                        |            |                                |          | 1     |      |
| 38       | O-ring                        |            | Diameter: 16,3                 |          | 3     |      |
|          |                               |            | Material type: FKM             |          |       |      |
|          |                               |            | Thickness: 2,4                 |          |       |      |
| 38       | O-ring                        |            |                                |          | 1     |      |
| 38       | O-ring                        |            | Diameter: 16,3                 |          | 3     |      |
|          |                               |            | Material type: EPDM            |          |       |      |
|          |                               |            | Thickness: 2,4                 |          |       |      |
| -        | Kit, shaft seal HQQV          |            |                                | 96455087 | 1     | pcs  |
| - 105    | Shaft seal                    |            | Material type: HQQV            |          | 1     |      |
|          | Compression spring            |            |                                |          |       |      |
|          | Plug                          |            |                                |          |       |      |
|          | Plug                          |            |                                |          |       |      |
|          | Pipe                          |            |                                |          |       |      |
|          | Seal ring, rotating           |            |                                |          |       |      |
|          | Spacer ring                   |            |                                |          |       |      |
|          | Seal driver, lower            |            |                                |          |       |      |
|          | Seal ring, stationary         |            |                                |          |       |      |
|          | Seal driver, upper            |            |                                |          |       |      |
|          | O-ring                        |            |                                |          |       |      |
|          | O-ring                        |            |                                |          |       |      |
| 109      | O-ring                        |            |                                |          |       |      |
| 110      | O-ring                        |            |                                |          |       |      |
| 113      | Driver                        |            |                                |          |       |      |
| -        | Kit, wear parts               |            | Material type: SILICON CARBIDE | 96455095 | 1     | pcs  |
| - 4a     | Chamber w. bearing cpl.       |            |                                |          | 1     |      |
| 4a       | Intermediate chamber          |            |                                |          |       |      |
| 45       | Neck ring                     |            |                                |          |       |      |
| 65       | Neck ring retainer            |            |                                |          |       |      |
| 45       | Neck ring                     |            |                                |          | 8     |      |
| 47       | Bearing ring, rotating        |            |                                |          | 1     |      |
| 64d      | Spacing pipe                  |            | Inner diameter: 12,85          |          | 1     |      |
|          |                               |            | Outer diameter: 15,85          |          |       |      |
|          |                               |            | Length: 4,50                   |          |       |      |
| 64c      | Clamp, splined                |            | Inner diameter: 8,5            |          | 1     |      |
|          |                               |            | Outer diameter: 15             |          |       |      |
| 65       | Neck ring retainer            |            |                                |          | 8     |      |
| 66       | Wedge lock washer             |            |                                |          | 1     |      |
| 67       | Lock nut                      |            | Thread: M8                     |          | 1     |      |
| 441b     | Gasket                        |            |                                |          | 2     |      |
| -        | Motor                         |            |                                | 85901797 | 1     | pcs  |
| -        | Kit, Ball bearing             |            |                                | 96279741 | 1     |      |
| 111      | Ball bearing                  |            | Designation: 6304.2Z.C3.SYN    |          |       |      |
| 111      | Ball bearing                  |            |                                |          |       |      |
| 157      | O-ring                        |            | Diameter: 32                   |          |       |      |
|          |                               |            | Material type: NBR             |          |       |      |
|          |                               |            | Thickness: 2                   |          |       |      |
| 158      | Waved washer                  |            |                                |          |       |      |
| -        | Kit, fan                      |            |                                | 96279721 | 1     |      |
| 156      | Fan                           |            |                                |          |       |      |
| 159a     | Seal ring                     |            |                                |          |       |      |
| -        | Kit, fan cover                |            |                                | 96279720 | 1     |      |
| 151      | Fan cover                     |            |                                |          |       |      |
| 152      | Pan head thread forming screw |            |                                |          |       |      |
| -        | Kit, flange                   |            |                                | 96279836 | 1     |      |
| 156b     | Flange                        |            |                                |          |       |      |
| 159.c    | Seal ring                     |            |                                |          |       |      |
| 184      | Gasket                        |            | Inner diameter: 114,80         |          |       |      |
|          |                               |            | Outer diameter: 121,20         |          |       |      |
|          |                               |            | Thickness: 0,25                |          |       |      |
| 185      | Pan head screw                |            |                                |          |       |      |
| 186      | Drain plug                    |            |                                |          |       |      |
| -        | Kit, shaft seal               |            |                                | 96279722 | 1     |      |
| 159c     | Seal ring                     |            |                                |          |       |      |
| 159a     | Seal ring                     |            |                                |          |       |      |

| Position | Description                            | Annotation | Classification data                                     | Part No. | Count | Unit |
|----------|----------------------------------------|------------|---------------------------------------------------------|----------|-------|------|
| -        | Kit, terminal box                      |            |                                                         | 96279837 | 1     |      |
| 152      | Screw                                  |            |                                                         |          |       |      |
| 164a     | Terminal box w/gasket                  |            |                                                         |          |       |      |
| 164      | Terminal box cover w/gasket            |            |                                                         |          |       |      |
| 166      | Pan head thread forming screw          |            |                                                         |          |       |      |
| 173a     | Washer                                 |            | Designation: SQUARE                                     |          |       |      |
|          |                                        |            | Inner diameter: 5,5                                     |          |       |      |
|          |                                        |            | Outer diameter: 10X10                                   |          |       |      |
|          |                                        |            | Thickness: 1,5                                          |          |       |      |
| 173      | Pan head screw                         |            | Designation: DIN 7985                                   |          |       |      |
| 178      | Pan head screw                         |            | Designation: DIN 7985                                   |          |       |      |
|          | Motor                                  |            |                                                         |          | 1     | pcs  |
| 1a       | Motor stool                            |            |                                                         | 98947314 | 1     | pcs  |
| 2        | Pump cover                             |            |                                                         | 96588244 | 1     | pcs  |
| + 4a     | Bulk, Chamber w. bearing cpl. (5 pcs)  |            |                                                         | 97690603 | 1     | pcs  |
| + 4a     | Chamber w. bearing cpl.                |            |                                                         | 98371226 | 1     | pcs  |
| - 4      | Bulk, Chamber cpl. (5 pcs)             |            |                                                         | 97690021 | 5     | pcs  |
| 45       | Bulk, Neck ring (24 pcs)               |            |                                                         | 96536194 | 1     |      |
| 65       | Bulk, Neck ring retainer (8 pcs)       |            |                                                         | 99490745 | 1     |      |
| 65       | Bulk, Neck ring retainer (24 pcs)      |            |                                                         | 99490747 | 1     |      |
| + 4      | Bulk, Chamber cpl. (10 pcs)            |            |                                                         | 96547663 | 5     | pcs  |
| + 4      | Chamber cpl.                           |            |                                                         | 98371224 | 5     | pcs  |
| + 5a     | Chamber cpl.                           |            |                                                         | 98371222 | 1     | pcs  |
| 6        | Base                                   |            |                                                         | 96588139 | 1     | pcs  |
| 7a       | Bulk, Combi Slot Torx screw (1000 pcs) |            |                                                         | 96886324 | 4     | pcs  |
| 7        | Bulk, Coupling guard (10 pcs)          |            |                                                         | 96603690 | 2     | pcs  |
| + 18     | Bulk, Air vent screw (5 pcs)           |            |                                                         | 96547461 | 1     | pcs  |
| + 18     | Air vent screw                         |            |                                                         | 95061351 | 1     | pcs  |
| 26       | Staybolt                               |            | Length: 227<br>Thread: M12                              | 98985601 | 4     | pcs  |
| 38       | Bulk, O-ring (10 pcs)                  |            | Diameter: 16,3<br>Material type: FKM<br>Thickness: 2,4  | 99198813 | 1     | pcs  |
| 37       | Bulk, O-ring (24 pcs)                  |            | Diameter: 137,5<br>Material type: FKM<br>Thickness: 3,3 | 96547657 | 2     | pcs  |
| 38       | Bulk, O-ring (50 pcs)                  |            | Diameter: 16,3<br>Material type: FKM<br>Thickness: 2,4  | 99412883 | 1     | pcs  |
| + 44a    | Guide vane                             |            |                                                         | 98488445 | 1     | pcs  |
| 47       | Bulk, Bearing ring, rotating (10 pcs)  |            |                                                         | 97905743 | 1     | pcs  |
| 47       | Bearing ring, rotating                 |            |                                                         | 96547649 | 1     | pcs  |
| + 49     | Impeller cpl.                          |            |                                                         | 98394411 | 7     | pcs  |
| + 51     | Shaft, spline, cpl.                    |            |                                                         | 96588231 | 1     | pcs  |
| 55       | Outer sleeve                           |            |                                                         | 98811301 | 1     | pcs  |
| 56       | Base plate                             |            |                                                         | 96588142 | 1     | pcs  |
| 60       | Formed wire spring                     |            |                                                         | 96547664 | 1     | pcs  |
| 64c      | Bulk, Clamp, splined (5 pcs)           |            | Inner diameter: 8,5<br>Outer diameter: 15               | 98496968 | 1     | pcs  |
| 64a      | Bulk, Spacing pipe (24 pcs)            |            |                                                         | 96536198 | 5     | pcs  |
| 66       | Bulk, Wedge lock washer (10 pcs)       |            |                                                         | 96536157 | 1     | pcs  |
| 67       | Bulk, Lock nut (10 pcs)                |            | Thread: M8                                              | 98277008 | 1     | pcs  |
| + 105    | Bulk, Shaft seal (15 pcs)              |            | Material type: HQQV                                     | 96983416 | 1     | pcs  |