

PROJECT: _____	UNIT TAG: _____	QUANTITY: _____
REPRESENTATIVE: _____	TYPE OF SERVICE: _____	DATE: _____
ENGINEER: _____	SUBMITTED BY: _____	DATE: _____
CONTRACTOR: _____	APPROVED BY: _____	DATE: _____
	ORDER NO.: _____	DATE: _____


CUE 3X380-500V IP20 1,1KW


CUE



Product photo could vary from the actual product

Conditions of Service	Pump Data	Motor Data
Flow: _____	Maximum ambient temperature: 122 °F	Rated voltage: 380 - 440 / 441 - 500 V
Head: _____	Approvals: CE, CULUS, C-TICK	Main frequency: 50 / 60 Hz
Efficiency: _____	Product number: 99616709	Enclosure class: IP20
Liquid: _____		Motor protection: YES
Temperature: _____		Thermal protection: external
NPSH required: _____		
Viscosity: _____		
Specific Gravity: _____		

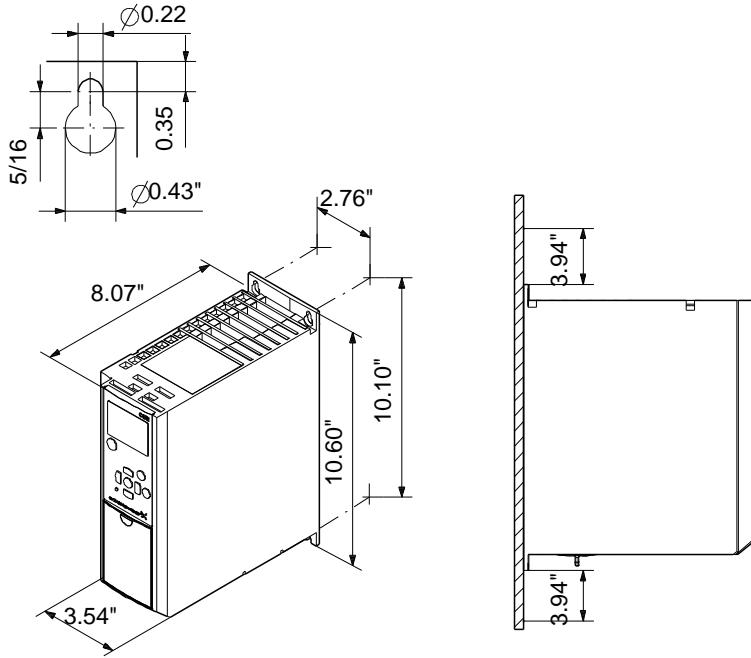

Count	Description
1	<p data-bbox="298 415 634 443">CUE 3X380-500V IP20 1,1KW</p> <div data-bbox="407 499 570 772"></div> <p data-bbox="686 800 1138 821">Product photo could vary from the actual product</p> <p data-bbox="298 831 561 852">Product No.: 99616709</p> <p data-bbox="298 888 1404 989">CUE is a complete range of external frequency converters designed for speed control of a wide range of Grundfos pumps. CUE has a built-in PI controller and offers the same functionality and user-interface as Grundfos E-pumps. CUE solutions can thus be seen as an extension to the E-pump range.</p> <p data-bbox="298 1003 984 1024">By choosing a CUE-solution, you will get the following benefits:</p> <ul data-bbox="337 1035 1300 1205" style="list-style-type: none">- Grundfos E-pump functionality and user-interface- application- and pump-family-related functions- increased comfort compared to fixed-speed pumps- very easy installation and commissioning compared to standard frequency converters- speed control of pumps up to 250 kW- speed control of pumps installed in potentially explosive environments. <p data-bbox="298 1241 764 1262">CUE offers the following inputs and output:</p> <ul data-bbox="337 1272 1130 1413" style="list-style-type: none">- RS-485 GENibus- an analog 0-10 V input for external setpoint- an analog 0/4-20 mA input for sensor- four digital inputs for various functions, for instance external start/stop- two signal relays (C/NO/NC). <p data-bbox="298 1451 440 1472">Accessories:</p> <p data-bbox="298 1482 581 1503">Input/output add-on board</p> <p data-bbox="298 1514 570 1535">Provides additional input:</p> <ul data-bbox="337 1545 1300 1623" style="list-style-type: none">- one 0/4-20 mA analog input for an additional sensor- one 0-20 mA analog output- two inputs for Pt100/Pt1000 temperature sensors, for instance for bearing monitoring. <p data-bbox="298 1661 435 1682">Motor filters:</p> <p data-bbox="298 1692 1404 1734">For reduction of dU/dt and peak voltages to the motor windings and for reduction of the acoustic noise generated in the motor, a number of motor filters are offered:</p> <ul data-bbox="337 1745 711 1797" style="list-style-type: none">- dU/dt filters , 11-250 kW- Sine wave filters, 0.55-250 kW. <p data-bbox="298 1833 423 1854">Technical:</p> <p data-bbox="298 1864 886 1885">Approvals on nameplate: CE, CULUS, C-TICK</p>



Company name:

Created by:

Phone:

Date:

5/26/2020




Count	Description
	<p data-bbox="298 415 440 443">Installation:</p> <p data-bbox="298 445 789 472">Range of ambient temperature: 32 .. 122 °F</p> <p data-bbox="298 474 740 501">Relative humidity: 5-95 %</p> <p data-bbox="298 533 477 560">Electrical data:</p> <p data-bbox="298 562 737 590">Rated power - P2: 1.5 HP</p> <p data-bbox="298 592 773 619">Main frequency: 50 / 60 Hz</p> <p data-bbox="298 621 948 648">Rated voltage: 3 x 380 - 440 / 441 - 500 V</p> <p data-bbox="298 651 740 678">Rated current: 3-2.7 A</p> <p data-bbox="298 680 699 707">Maximum current consumption: 3 A</p> <p data-bbox="298 709 716 737">Efficiency at full load: 96 %</p> <p data-bbox="298 739 711 766">Enclosure class (IEC 34-5): IP20</p> <p data-bbox="298 798 391 825">Others:</p> <p data-bbox="298 827 737 854">Net weight: 10.8 lb</p>



Company name:
Created by:
Phone:

Date: 5/26/2020

Description	Value
General information:	
Product name:	CUE 3X380-500V IP20 1,1KW
Product No.:	99616709
EAN:	5713831974147
	5713831974147
Technical:	
Approvals on nameplate:	CE, CULUS, C-TICK
Installation:	
Range of ambient temperature:	32 .. 122 °F
Relative humidity:	5-95 %
Mounted on:	Wall
Electrical data:	
Rated power - P2:	1.5 HP
Main frequency:	50 / 60 Hz
Rated voltage:	3 x 380 - 440 / 441 - 500 V
Rated current:	3-2.7 A
Maximum current consumption:	3 A
Efficiency at full load:	96 %
Enclosure class (IEC 34-5):	IP20
Motor protection:	YES
Thermal protec:	external
Cable length:	150/300 m
Others:	
Net weight:	10.8 lb

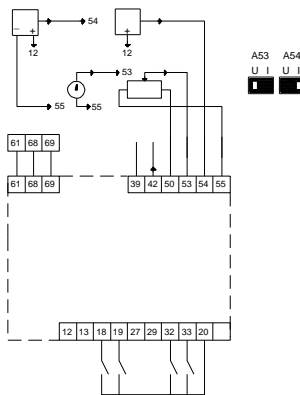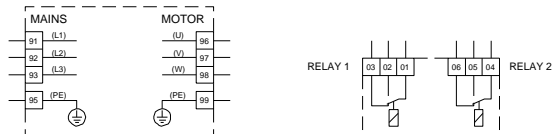
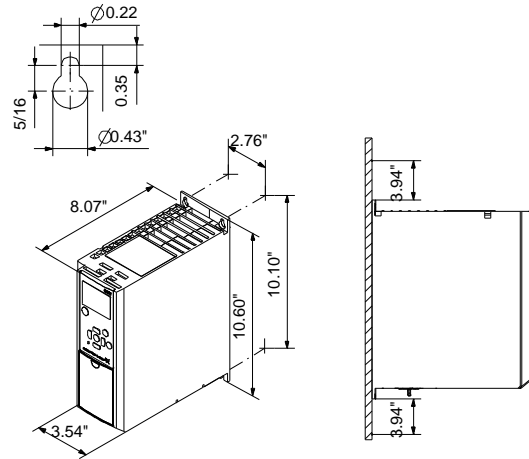




Company name:
Created by:
Phone:




Date: 5/26/2020

99616709 CUE 3X380-500V IP20 1,1KW

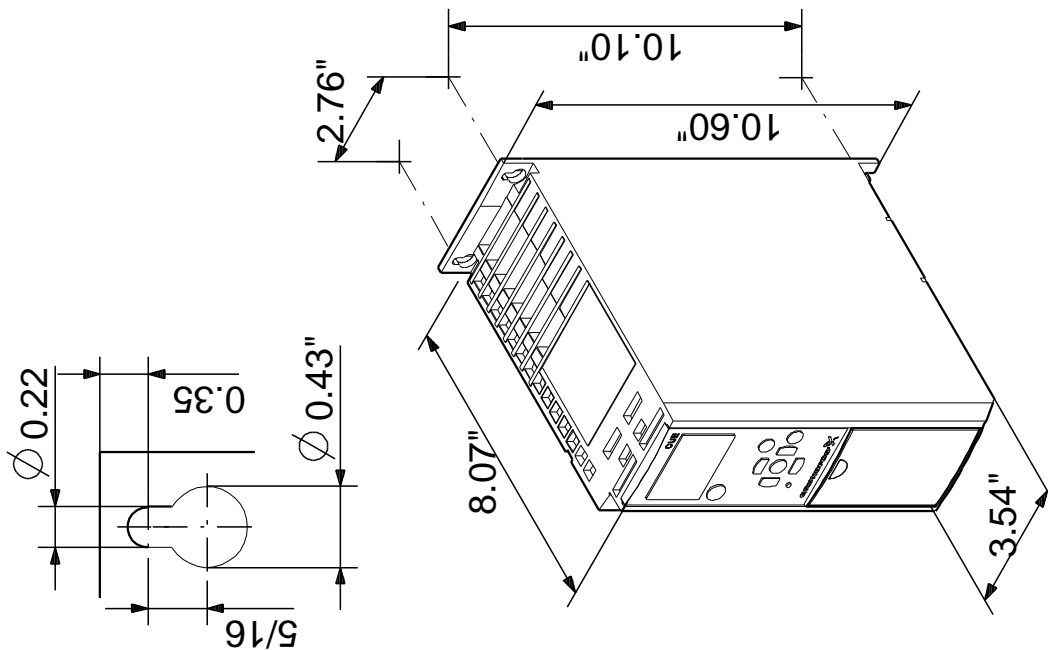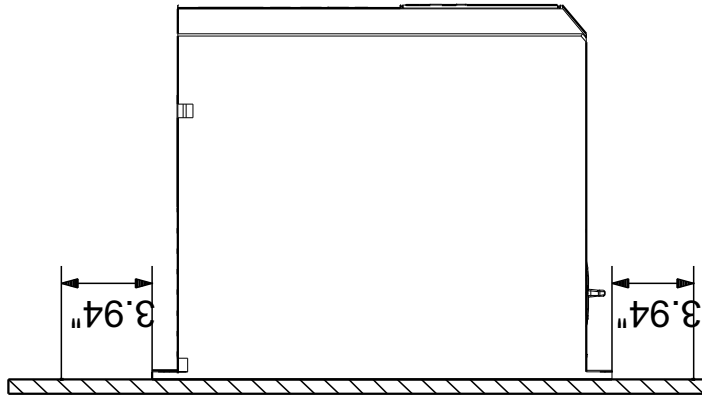

Note! All units are in [in] unless otherwise stated.
Disclaimer: This simplified dimensional drawing does not show all details.

99616709 CUE 3X380-500V IP20 1,1KW

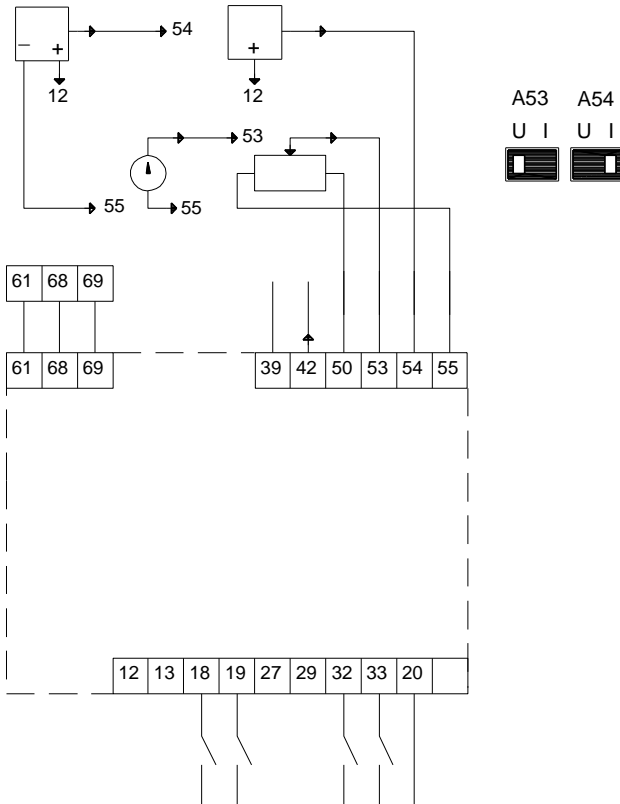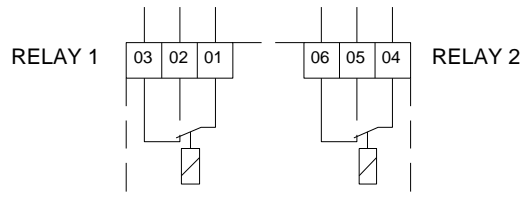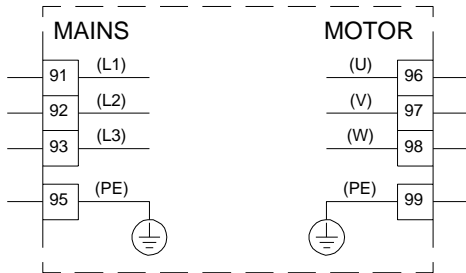

All units are [in] unless otherwise presented.