

|              |             |           |
|--------------|-------------|-----------|
| Customer     | Date        | 6/19/2019 |
| Contact      | Project     |           |
| Phone number | Project no. |           |
| Email        |             |           |



# 1SV29GF4C60

## Operating Data


|                           |                   |                           |                |
|---------------------------|-------------------|---------------------------|----------------|
| Pump type                 | Multi-Stage Pumps | Fluid                     | Water          |
| No. of pumps / Reserve    | 1 / 0             | Operating temperature t A | °F 39.2        |
| Nominal flow              | US g.p.m. 0       | pH-value at t A           | 7              |
| Nominal head              | ft 0              | Density at t A            | lb/ft³ 62.4    |
| Static head               | ft 0              | Kin. viscosity at t A     | ft²/s 1.689E-5 |
| Inlet pressure            | psi 0             | Vapor pressure at t A     | psi 14.5       |
| Environmental temperature | °F 68             | Solids                    | 0              |
| Available system NPSH     | ft 0              | Altitude                  | ft 0           |

## Pump Data

|                       |                         |                  |                |
|-----------------------|-------------------------|------------------|----------------|
| Make                  | Goulds Water Technology | Nominal          | US g.p.m. ( )  |
| Speed                 | rpm 3500                | Max-             | US g.p.m. 12.3 |
| Number of stages      | 29                      | Min-             | US g.p.m.      |
| Max. working pressure | psi 348.5               | Nominal          | ft             |
| Head H(Q=0)           | ft 800                  | at Qmax          | ft 476.2       |
| Weight                | lb 140                  | at Qmin          | ft 803.8       |
| Max.                  | inch 0                  | Shaft power      | hp ( )         |
| Impeller R            | Designed                | Max. shaft power | hp 3.3         |
| Min.                  | inch 0                  | Efficiency       | %              |
|                       |                         | NPSH 3%          | ft             |

## Shaft Seal

|                      |                                 |
|----------------------|---------------------------------|
| Single Seal          | Xylem                           |
| Mechanical Seals     |                                 |
| 1 - Rotating Face    | Carbon                          |
| 2 - Stationary Face  | Silicon Carbide Graphite Filled |
| 3 - Elastomers       | Viton                           |
| 4 - Spring           | 316SS                           |
| 5 - Metal Components | 316SS                           |

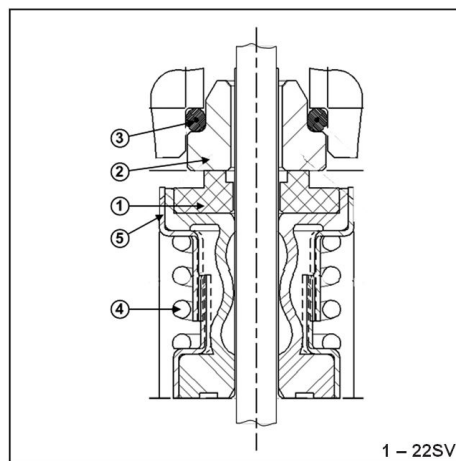

## Motor Data

|                 |                             |                  |       |                      |          |                  |          |
|-----------------|-----------------------------|------------------|-------|----------------------|----------|------------------|----------|
| Manufacturer    | Baldor                      | Electric voltage | 230 V | Speed                | 3450 rpm | Insulation class | F        |
| Specific design | 3ph TPE                     |                  |       | Frame size           | 56C      | Colour           | RAL 5010 |
| Type            | 230/460V 56C (V09A32F5BD2S) |                  |       | Degree of protection | IP 55    |                  |          |
| Rated power     | 3 hp                        | Electric current | 7 A   |                      |          |                  |          |

## Remarks:


|              |                |
|--------------|----------------|
| Customer     | Date 6/19/2019 |
| Contact      | Project        |
| Phone number | Project no.    |
| Email        |                |



# 1SV29GF4C60

## Pump Materials

|                               |                                           |
|-------------------------------|-------------------------------------------|
| 1 - Pump Body                 | Cast Iron (ASTM Class 35/40B)             |
| 2 - Impeller                  | Stainless Steel (AISI 304)                |
| 3 - Diffuser                  | Stainless Steel (AISI 304)                |
| 4 - Casing                    | Stainless Steel (AISI 316L)               |
| 5 - Shaft                     | Stainless Steel (AISI 316)                |
| 6 - Adapter                   | Cast Iron (ASTM Class 35/40B)             |
| 7 - Base                      | N/A                                       |
| 8 - Coupling                  | Aluminum (A384.0-F)                       |
| 9 - Seal Plate                | Stainless Steel (AISI 316L)               |
| 12 - Coupling Guard           | Stainless Steel (AISI 304)                |
| 13 - Shaft Sleeve and Bushing | Tungsten carbide                          |
| 14 - Fill/Drain Plugs         | Stainless Steel (AISI 316)                |
| 15 - Tie Rods                 | Carbon Steel / Zinc Plated (A29 Gr. 1045) |
| 16 - Wear Ring                | PPS                                       |
| 17 - Seal Gland               | Stainless Steel (AISI 316)                |

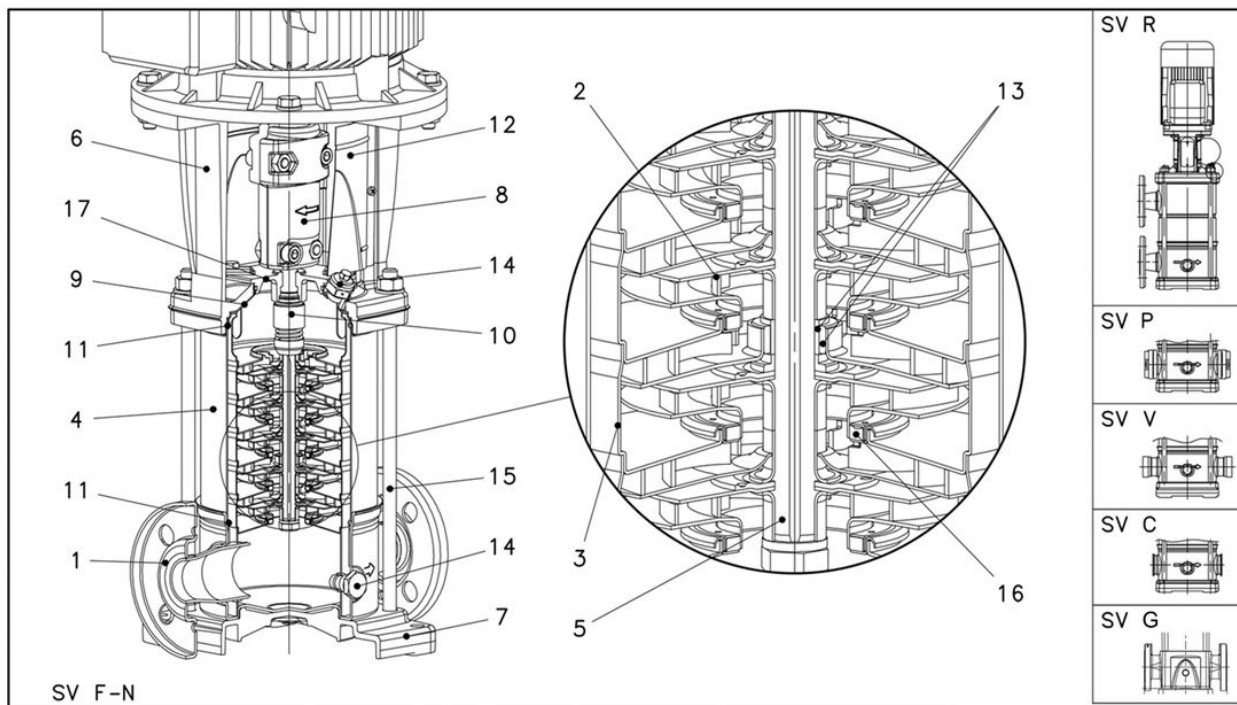

Remarks:

|              |             |           |
|--------------|-------------|-----------|
| Customer     | Date        | 6/19/2019 |
| Contact      | Project     |           |
| Phone number | Project no. |           |
| Email        |             |           |

## 1SV29GF4C60


### Hydraulic Data

| Operating Data Specification |             | Hydraulic data (duty point) |  | Impeller design |          |
|------------------------------|-------------|-----------------------------|--|-----------------|----------|
| Flow                         | 0 US g.p.m. | Flow                        |  | Impeller R      | "        |
| Head                         | 0 ft        | Head                        |  | Frequency       | 60 Hz    |
| Static head                  | 0 ft        |                             |  | Speed           | 3500 rpm |

#### Power datas refered to:

Water [100%] ; 39.2°F; 62.4lb/ft³; 1.69E-5ft²/s

Performance according to ISO 9906 - Annex A

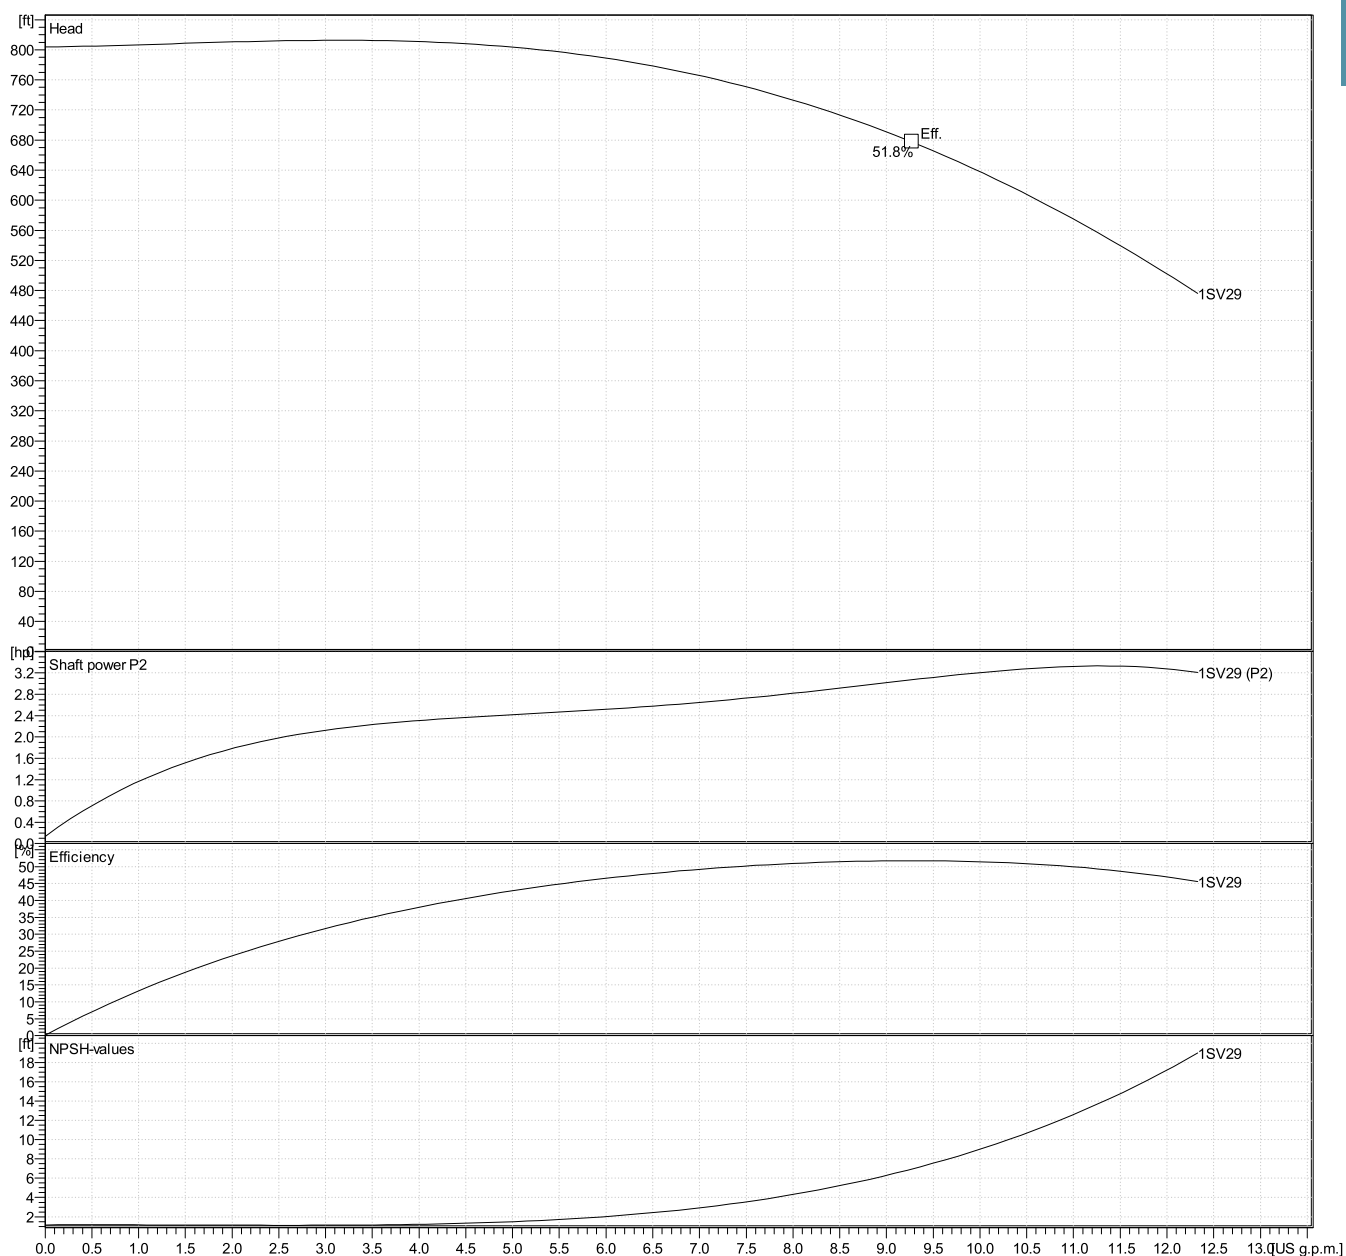


Customer  
Contact  
Phone number  
Email

Date 6/19/2019  
Project  
Project no.

## 1SV29GF4C60

### Drawing

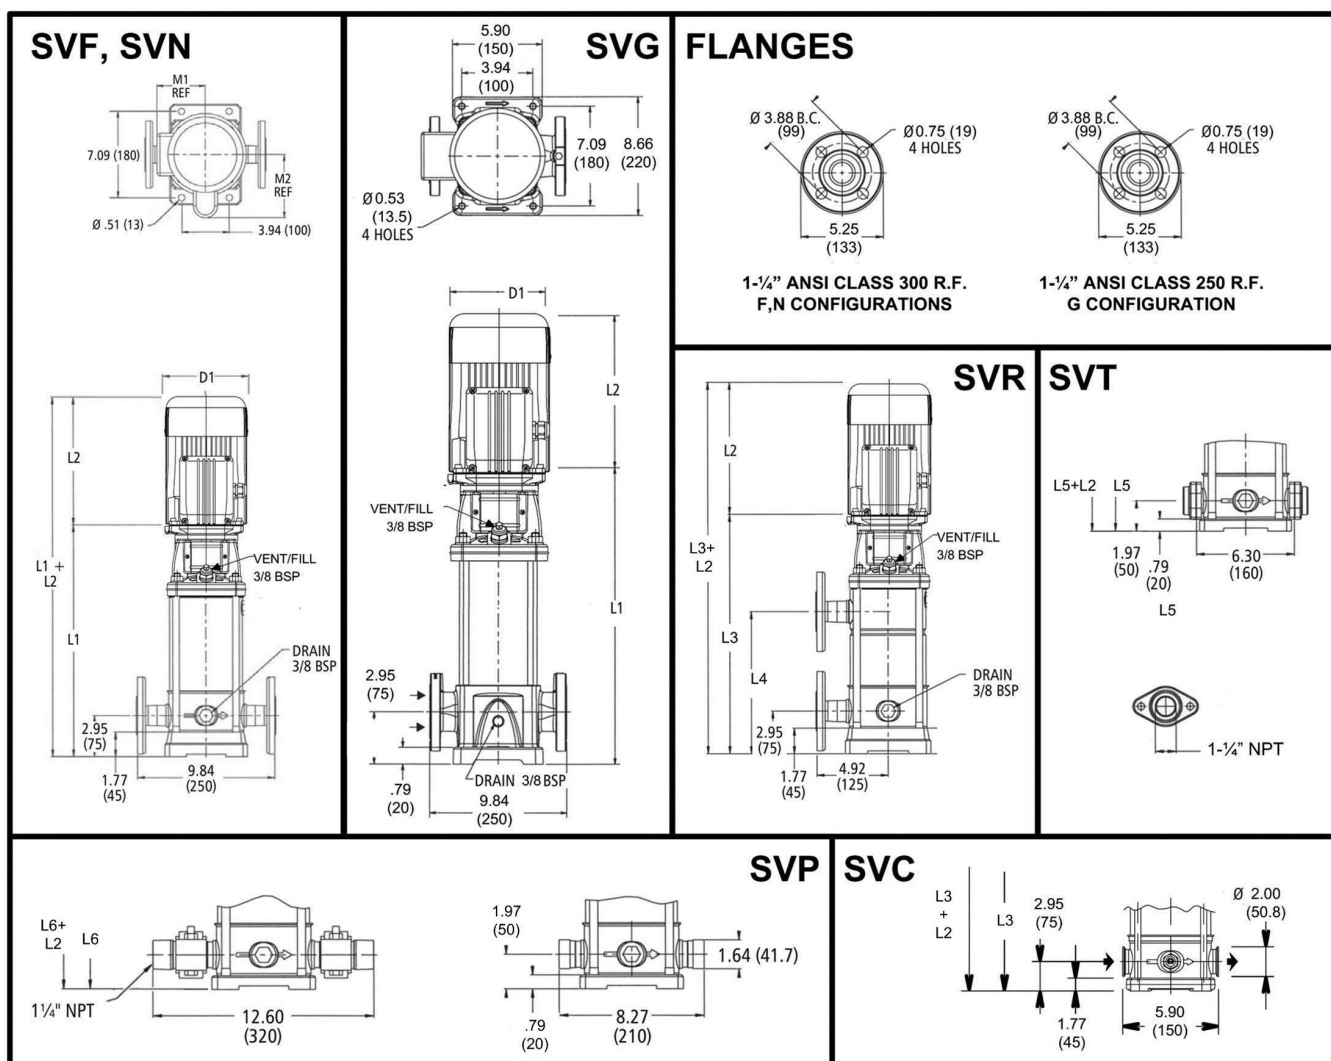

### Dimensions inch

|            |                                 |  |  |  |  |           |
|------------|---------------------------------|--|--|--|--|-----------|
| D1 max     | 7 <sup>3</sup> / <sub>16</sub>  |  |  |  |  | Weight    |
| D2         | 8 <sup>7</sup> / <sub>8</sub>   |  |  |  |  | 140.38 lb |
| L1         | 34 <sup>1</sup> / <sub>8</sub>  |  |  |  |  |           |
| L2         | 12 <sup>7</sup> / <sub>16</sub> |  |  |  |  |           |
| L3         | 34 <sup>1</sup> / <sub>8</sub>  |  |  |  |  |           |
| L4         | 25 <sup>1</sup> / <sub>2</sub>  |  |  |  |  |           |
| L6         | 33 <sup>1</sup> / <sub>8</sub>  |  |  |  |  |           |
| M. Ref     | 6 <sup>15</sup> / <sub>16</sub> |  |  |  |  |           |
| NEMA Frame | 182TC                           |  |  |  |  |           |