

Count

1

Company name: Created by: Phone:

Phone: Date: 7/9/2019 Description **BALDOR 56C** Product photo could vary from the actual product Product No.: 84Z04010 The motor is a 1-phase AC standard motor. Installation: Maximum ambient temperature: 104 °F Flange size for motor: 56C **Electrical data:** Motor type: Baldor Rated power - P2: 2 HP Main frequency: 60 Hz Rated voltage: 1 x 115/208-230 V Service factor: 1.15 Rated current: 23,0/12,7-11,5 A Rated speed: 3450 rpm Number of poles: 2 Insulation class (IEC 85): F Others: Net weight: 48.5 lb Color/Type: NCS 9000 gloss 40+-10 Custom tariff no.: 8501.40.5040



Company name: Created by: Phone:

		Date:	7/9/2019	
Description	Value			
General information:		 		
Product name:	BALDOR 56C		N	
Product No.:	84Z04010		• •	-
EAN:	5700395150223		1	i
Technical:				
Shaft diameter:	0.63 in			1
Length of shaft end:	1.88 in			
Cooling:	TEFC			
Installation:		- 4		
Maximum ambient temperature:	104 °F			
Flange size for motor:	56C			
Electrical data:				
Motor type:	Baldor			•
Rated power - P2:	2 HP			
Main frequency:	60 Hz			
Rated voltage:	1 x 115/208-230 V			
Service factor:	1.15	ſ		
Rated current:	23,0/12,7-11,5 A	(1.4)		I
Load current:	25.4/12.7 A			1
Rated speed:	3450 rpm			
Number of poles:	2			-
Insulation class (IEC 85):	F			
Motor protection:	NONE			•
Tropic protec:	No			
Thermal protec:	internal			
Winding 1:	2			I
Winding 2:	2			1
Winding 3:	2			
Mounting design per IEC 34-7:	NEMA type C			_
Others:				
Brand:	Baldor			
Net weight:	48.5 lb			
Color/Type:	NCS 9000 gloss 40+-10			
Custom tariff no .:	8501.40.5040			
				/

Μ




Company name: Created by: Phone:

Date:

7/9/2019

84Z04010 BALDOR 56C 60 Hz

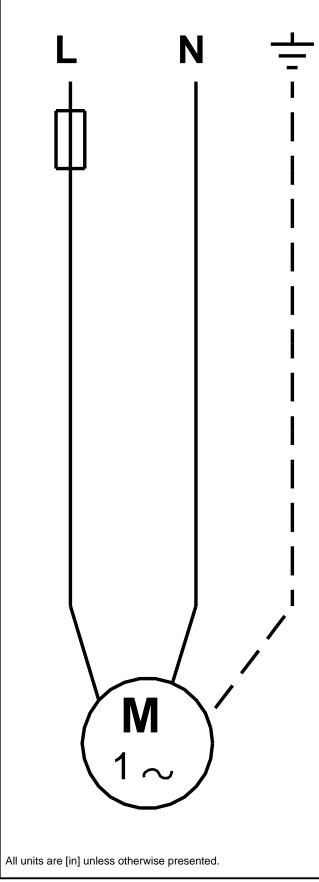



Ordering data

84Z04010 BALDOR 56C 60 Hz Company name: Created by: Date: Fax:

Phone: Project: Contact:

Color/type

Client number: Reference number: Product No.: 84Z04010 7/9/2019



Electrical data	:	Explosion protection:		
Frequency	60 Hz	Type of protection	-	
Rated motor voltage	115/208-230 V			
Rated motor power	2 HP	-		
Rated motor speed	3450 rpm	Ambient conditions:		
Rated motor torque -	-	Ambient temperature		
Wiring connection -	- 23,0/12,7-11,5 A	Altitude above sea level	3280 ft	
Rated motor current Max motor current -		Approvals and specifications	IEC 60034	
Efficiency class				
Full load Efficiency % -		-		
Power factor -		General data:		
Starting- / Rated motor current (50/60)	/	Frame size	Baldor	
Breakdown- / Rated motor torque (50/60)	/ %	Type of construction	NEMA type C	
Starting- / Rated motor torque (50/60)	/ //		Flange size 56C	
	,	 Weight, without optional accessories 	48.5 lb	
		Frame material	-	
Mechanical data	a:	Degree of protection		
		Method of cooling, TEFC	TEFC	
Noise measurements (50/60)		_ Vibration class		
Moment of inertia	-	Insulation class	155(F) to 130(B)	
Drain holes		_ Duty type	-	
Bearing DE	6306	Direction of rotation CCW /		
Bearing NDE	6302	_		
Bearing arrangement	NDE-locked	Torminal b	A Y <i>i</i>	
ype of bearing DE -		Terminal box:		
Bearing seal DE			-	
Characteristic of grease DE -		- Cable entry -		
Type of bearing NDE -		_ Cable gland -		
Bearing seal NDE	-	-		
Characteristic of grease NDE	-	-		
Regreasing device No		Protection:		
Type of lubrication -		Built-in protection	-	
Relubrication interval	-	-		
Quantity of grease for relubrication	-	_		
External grounding	-			

Grundfos A/S reserves the right to change the specifications without further notice. Grundfos A/S cannot be held responsible for any missing, inaccurate or obsolete data. There may be discrepancies between calculated and rating plate values.

NCS 9000 gloss 40+-10