



Count	Description
1	<p data-bbox="225 340 416 362">BALDOR 182TC</p>  <p data-bbox="619 772 1072 795">Product photo could vary from the actual product</p> <p data-bbox="225 801 496 824">Product No.: 84Z04014</p> <p data-bbox="225 831 703 853">The motor is a 1-phase AC standard motor.</p> <p data-bbox="225 891 368 913">Installation:</p> <p data-bbox="225 920 667 943">Maximum ambient temperature: 104 °F</p> <p data-bbox="225 949 667 972">Flange size for motor: 182TC</p> <p data-bbox="225 1010 405 1032">Electrical data:</p> <p data-bbox="225 1039 667 1061">Motor type: Baldor</p> <p data-bbox="225 1068 587 1090">Rated power - P2: 3 HP</p> <p data-bbox="225 1097 667 1120">Main frequency: 60 Hz</p> <p data-bbox="225 1126 794 1149">Rated voltage: 1 x 115/208-230 V</p> <p data-bbox="225 1155 639 1178">Service factor: 1.15</p> <p data-bbox="225 1184 735 1207">Rated current: 29/16-14,5 A</p> <p data-bbox="225 1214 699 1236">Rated speed: 3450 rpm</p> <p data-bbox="225 1243 603 1265">Number of poles: 2</p> <p data-bbox="225 1272 603 1294">Insulation class (IEC 85): F</p> <p data-bbox="225 1332 320 1355">Others:</p> <p data-bbox="225 1361 667 1384">Net weight: 70.6 lb</p> <p data-bbox="225 1391 858 1413">Color/Type: NCS 9000 gloss 40+-10</p> <p data-bbox="225 1420 746 1442">Custom tariff no.: 8501.52.4000</p>


Description	Value
General information:	
Product name:	BALDOR 182TC
Product No.:	84Z04014
EAN:	5700395150230
Technical:	
Shaft diameter:	1.13 in
Length of shaft end:	2.63 in
Cooling:	TEFC
Installation:	
Maximum ambient temperature:	104 °F
Flange size for motor:	182TC
Electrical data:	
Motor type:	Baldor
Rated power - P2:	3 HP
Main frequency:	60 Hz
Rated voltage:	1 x 115/208-230 V
Service factor:	1.15
Rated current:	29/16-14,5 A
Load current:	31,8/18-16,9 A
Rated speed:	3450 rpm
Number of poles:	2
Insulation class (IEC 85):	F
Motor protection:	NONE
Tropic protec:	No
Thermal protec:	internal
Others:	
Brand:	Baldor
Net weight:	70.6 lb
Color/Type:	NCS 9000 gloss 40+-10
Custom tariff no.:	8501.52.4000

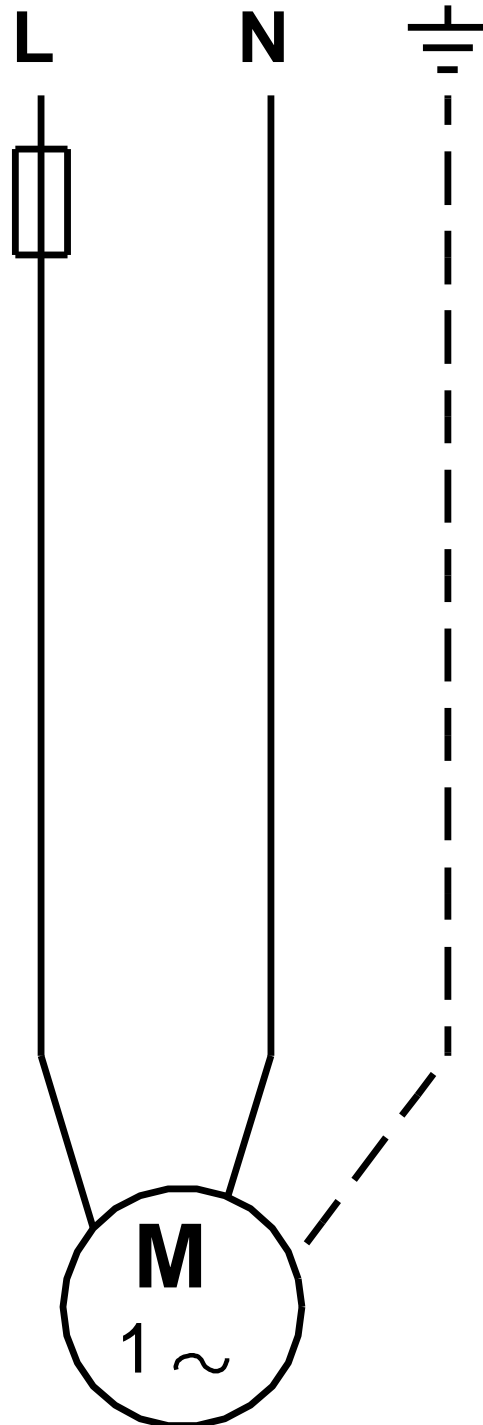

84Z04014 BALDOR 182TC 60 Hz

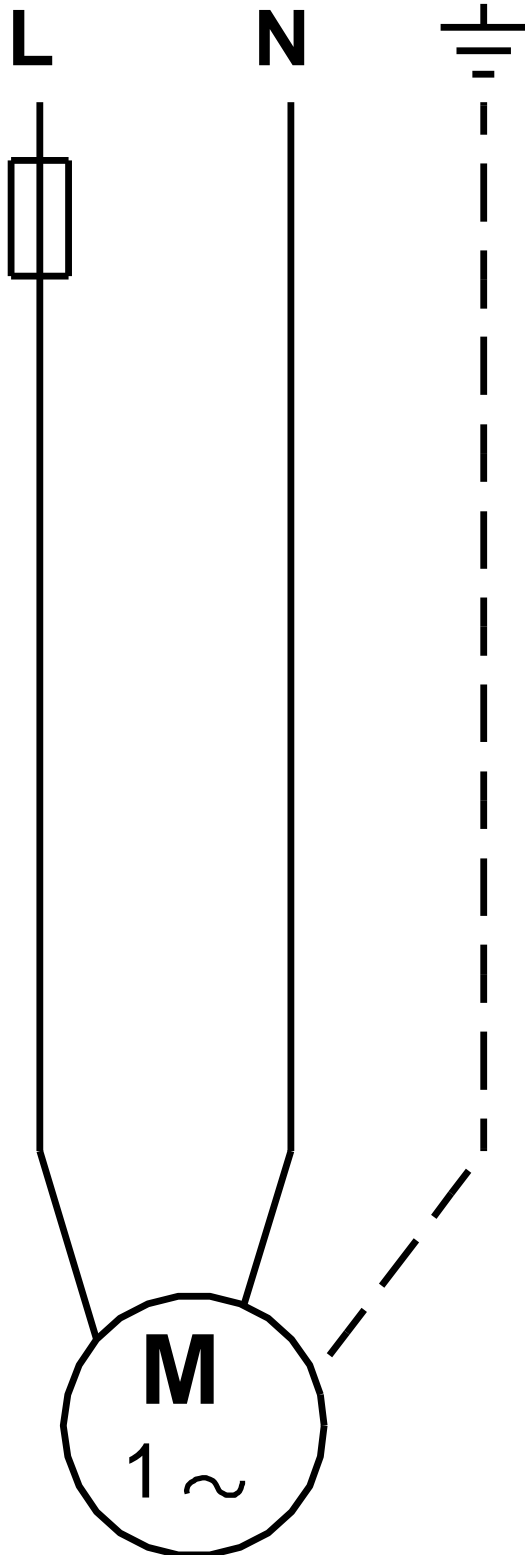

All units are [in] unless otherwise presented.



Ordering data

84Z04014 BALDOR 182TC 60 Hz

Product No.: 84Z04014

Company name:

Date:

7/24/2019

Created by:

Phone:

Fax:

Project:

Client number:

Contact:

Reference number:

Electrical data:

Frequency	60 Hz
Rated motor voltage	115/208-230 V
Rated motor power	3 HP
Rated motor speed	3450 rpm
Rated motor torque	-
Wiring connection	-
Rated motor current	29/16-14,5 A
Max motor current	-
Efficiency class	-
Full load Efficiency %	-
Power factor	-
Starting- / Rated motor current ^(50/60)	/
Breakdown- / Rated motor torque ^(50/60)	/ %
Starting- / Rated motor torque ^(50/60)	/

Mechanical data:

Noise measurements ^(50/60)	-
Moment of inertia	-
Drain holes	-
Bearing DE	6307
Bearing NDE	-
Bearing arrangement	NDE-locked
Type of bearing DE	-
Bearing seal DE	-
Characteristic of grease DE	-
Type of bearing NDE	-
Bearing seal NDE	-
Characteristic of grease NDE	-
Regreasing device	No
Type of lubrication	-
Relubrication interval	-
Quantity of grease for relubrication	-
External grounding	-
Color/type	NCS 9000 gloss 40+-10

Explosion protection:

Type of protection	-
--------------------	---

Ambient conditions:

Ambient temperature	-
Altitude above sea level	3280 ft
Approvals and specifications	IEC 60034

General data:

Frame size	Baldor
Type of construction	-
Flange size	182TC
Weight, without optional accessories	70.6 lb
Frame material	-
Degree of protection	-
Method of cooling, TEFC	TEFC
Vibration class	-
Insulation class	155(F) to 130(B)
Duty type	-
Direction of rotation	CCW /

Terminal box:

Material of terminal box	-
Cable entry	-
Cable gland	-

Protection:

Built-in protection	-
---------------------	---