

## Submittal Data

PROJECT:	UNIT TAG:	QUANTITY:	
	 TYPE OF SERVICE:		
REPRESENTATIVE:	SUBMITTED BY:	DATE:	
ENGINEER:	APPROVED BY:	DATE:	
CONTRACTOR:	 ORDER NO.:	 DATE:	

## VFI/-1.3-25m/1/C/M5.00-X/EG6/S




Accessories

Product photo could vary from the actual product


Conditions of Service	Pump Data		Motor Data	1
Flow:	Maximum operating pressure: Liquid temperature range: Maximum ambient temperature: Type of connection: Product number:	435.11 psi -22 248 °F 158 °F NPT 98126404	Enclosure class:	IP67



## Submittal Data

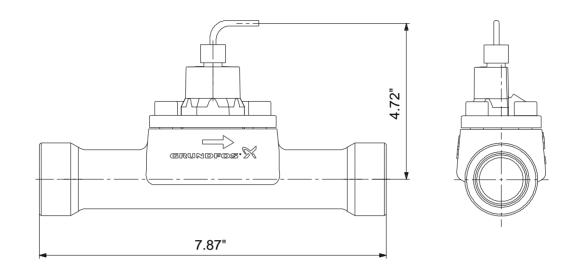

Materials: Material: Stainless steel

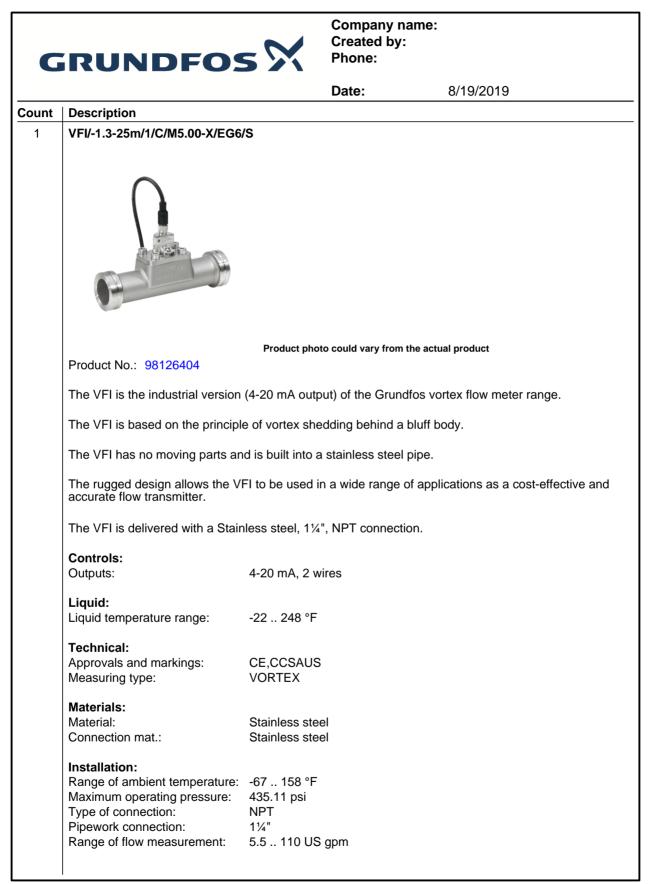

Printed from Grundfos Product Center [2019.04.001]

Company name: Created by: Phone:

			Date:	8/19/2019
Count	Description			
	Electrical data: Enclosure class (IEC 34-5): Length of cable: Udc:	IP67 16.4 ft 30 V 12 V		
	Others:			
	Net weight:	5.6 lb		
	Gross weight:	8.47 lb		
1				



Company name: Created by: Phone:

Date:

æ

8/19/2019

Description	Value
General information:	
Product name:	VFI/-1.3-25m/1/C/M5.00-X/EG 6/S
Product No.:	98126404
EAN:	5710629492104
	5710629492104
Technical:	
Flow range:	1.3-25 m³/h
Approvals and markings:	CE,CCSAUS
Measuring type:	VORTEX
Materials:	
Material:	Stainless steel
Connection mat .:	Stainless steel
Installation:	
Range of ambient temperature:	-67 158 °F
Maximum operating pressure:	435.11 psi
Type of connection:	NPT
Pipework connection:	1¼"
Range of flow measurement:	5.5 110 US gpm
Liquid:	
Liquid temperature range:	-22 248 °F
Electrical data:	
Enclosure class (IEC 34-5):	IP67
Length of cable:	16.4 ft
Udc:	30 V
	12 V
Controls:	
4-20 mA control:	YES
Outputs:	4-20 mA, 2 wires
Others:	
Brand:	GRUNDFOS DIRECT SENSORS
Net weight:	5.6 lb
Gross weight:	8.47 lb

