



**Pump Performance Curve**

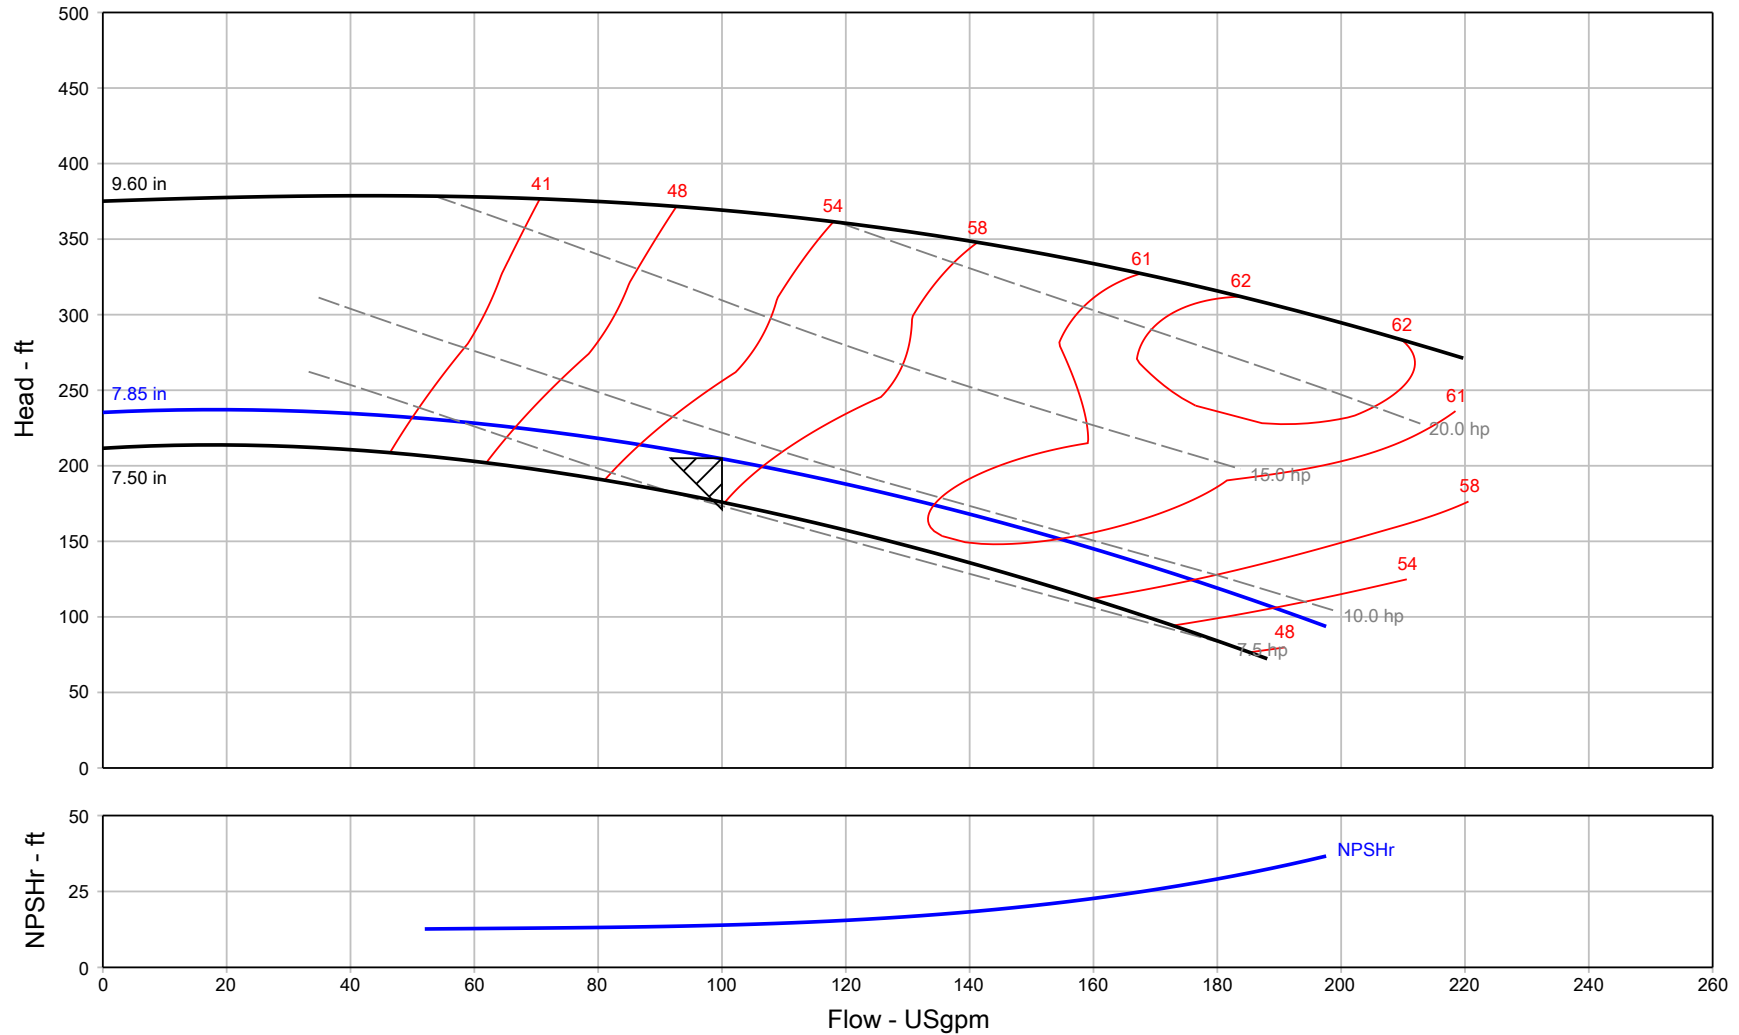

Project name :	Tag Number : 002	Flow, rated : 100.0 USgpm
Consulting engineer :	Service :	Differential head / pressure, rated : 205.0 ft
Customer :	Model : 15951 LC	Rated power (based on duty point) : 9.09 hp
Customer ref. / PO :	Quantity : 1	Max power (non-overloading) : 9.71 hp
Project Number / ID : 1109944	Quoted By (Sales Office) : PFC EQUIPMENT INC	Efficiency : 56.86 %
Date last saved : 02/04/2020 4:46 PM	Quoted By (Sales Engineer) : Corey Nath	Impeller diameter, rated : 7.85 in
Based on curve number : RC1949-SS Rev 0	Stages : 1	PEI (CL) : 0.92
	Speed, rated : 3530 rpm	ER (CL) : 8

**Multi-Speed Performance Curve**

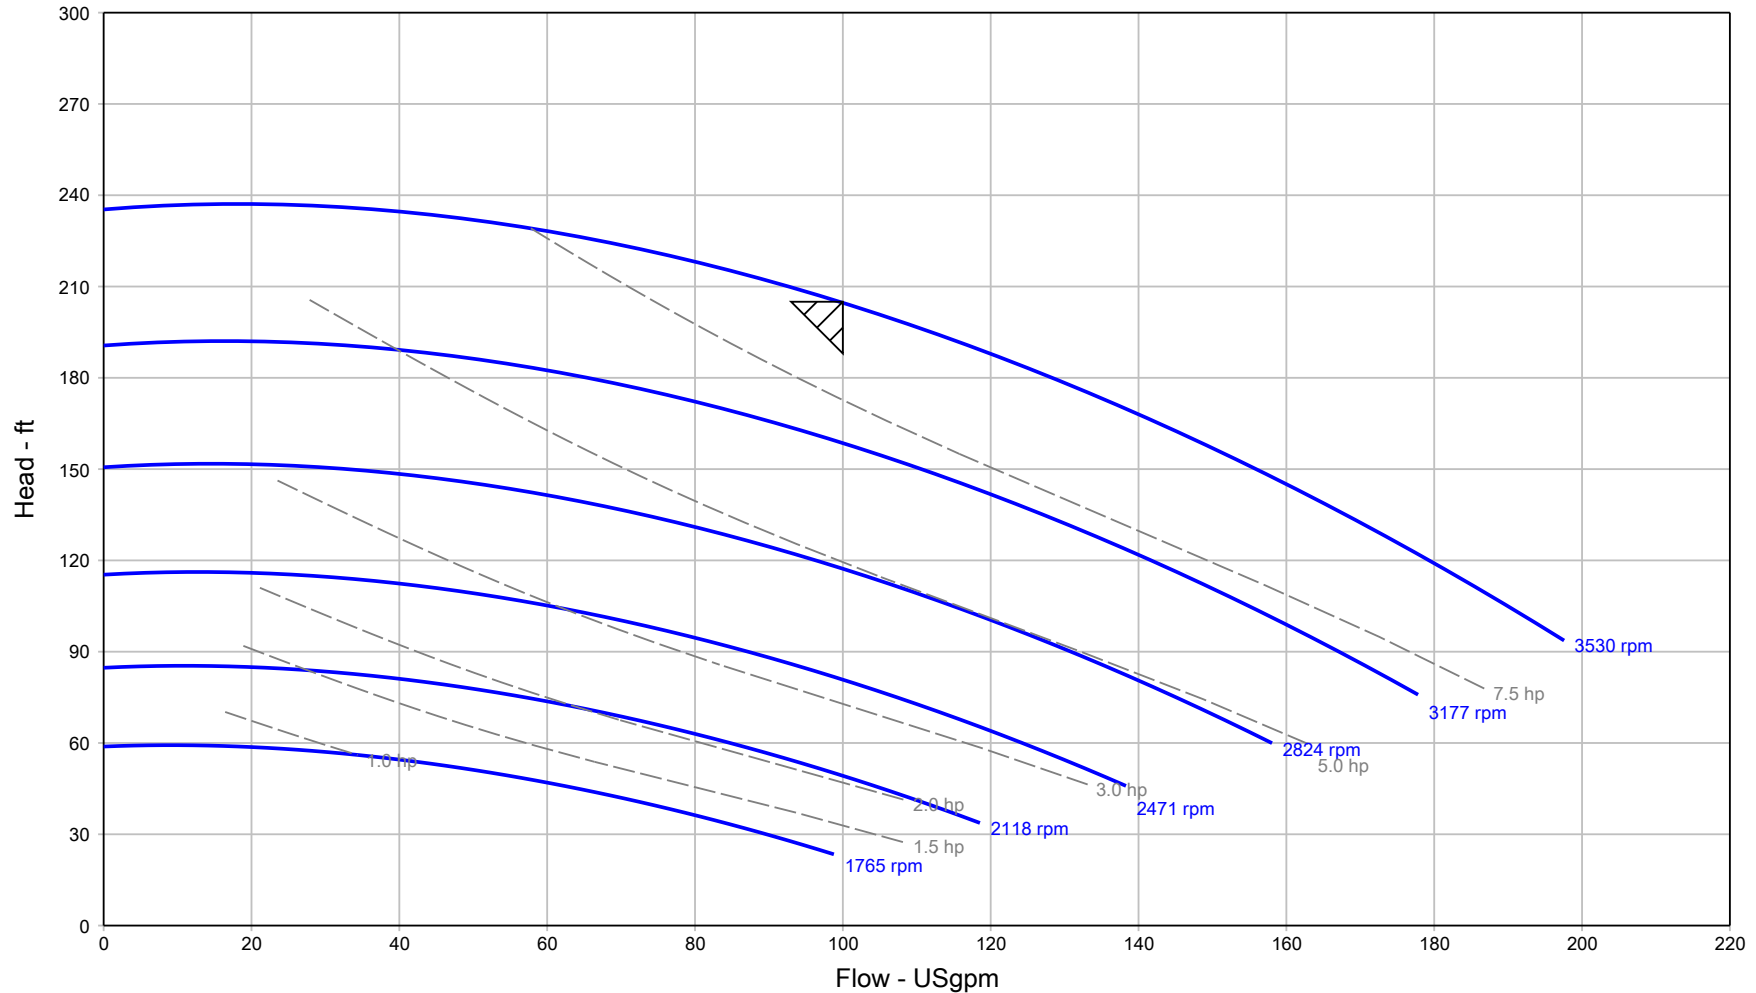


Project name	:	Tag Number	:	002	Speed, rated	:	3530 rpm
Consulting engineer	:	Service	:		Flow, rated	:	100.0 USgpm
Customer	:	Model	:	15951 LC	Differential head / pressure, rated	:	205.0 ft
Customer ref. / PO	:	Quantity	:	1	Fluid density, rated / max	:	1.000 / 1.000 SG
Project Number / ID	:	Quoted By (Sales Office)	:	PFC EQUIPMENT INC	Viscosity	:	1.00 cP
Date last saved	:	Quoted By (Sales Engineer)	:	Corey Nath	Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	:	1.00 / 1.00 / 1.00 / 1.00
		Stages	:	1	Based on curve number	:	RC1949-SS Rev 0

**Construction Datasheet**


Project name	:		Tag Number	:	002
Consulting engineer	:		Service	:	
Customer	:	PFC EQUIPMENT INC	Model	:	15951 LC
Customer ref. / PO	:		Quantity	:	1
Quote Number / ID	:	1109944	Quoted By (Sales Office)	:	PFC EQUIPMENT INC
Date last saved	:	02/04/2020 4:46 PM	Quoted By (Sales Engineer)	:	Corey Nath
<b>Construction</b>			<b>Motor Information</b>		
Nozzle	Size (in.)	Nozzle Configuration	Pos'n	Manufacturer	: Baldor
Suction	2	NPS	End	Frame Size	: 215JM
Discharge	1.5	NPS	Top	Power	: 10.00 hp
Orientation / Configuration	:	Horizontal	RPM	:	3600 rpm
Rotation	:	Clockwise	Enclosure	:	TEFC
Wear Ring Configuration	:	Single - Case	Operating Power Supply	:	230/460/3/60
Discharge Elbow Size	:	-	Efficiency	:	Premium
Subplate	:	-	Service factor	:	1.15
Sump Depth (feet)	:	-	Motor Application	:	General Purpose
Bearing Frame	:	-	Motor Options/Accessories	:	-
Bearing Frame Foot	:	-	Cord Length (feet)	:	-
Bearing Type (Radial/Thrust)	:	In motor	<b>Materials</b>		
Bearing Lubrication	:	-	Case	:	Cast Iron, ASTM A48 - Class 30
Thrust Bearing	:	-	Motor Bracket	:	Cast Iron, ASTM-A48, CL 30
Intermediate Bearing	:	-	Impeller	:	Stainless Steel, AISI-304 (H304)
Lower Bearing	:	-	Impeller Cap Screw and Washer	:	Stainless Steel, AISI-303
Bearing Housing Accessories	:	-	Impeller Key	:	Stainless Steel, AISI 316
PACO Construction code	:	10-15951-130008-2781P	Case wear ring	:	Tin Bronze, ASTM B584-90500 (B18)
<b>Baseplate, Coupling and Guard</b>			Impeller wear ring	:	-
Baseplate	:	Not Applicable	Pump Shaft	:	Steel, AISI-1040
Drip Pan	:	-	Sleeve	:	Bronze, III932, C89835
Coupling	:	-	Line Shaft	:	-
Guard	:	Not Applicable	Column	:	-
<b>Seal &amp; Packing Construction</b>			Discharge Pipe	:	-
Sealing Method	:	Single Seal, Type 21S	Discharge Elbow	:	-
Seal Material	:	Buna Carbon Ceramic SS-Spring and Hardware	Suction Elbow	:	-
Packing Gland	:	-	Subplate	:	-
Lantern Ring	:	-	Hardware	:	Steel, Grade 5
Recirculation Lines	:	None	O Rings	:	Buna N
<b>Weights (Approx.)</b>			Pump Coatings	:	Standard Manufacturer's Paint
Pump	:	70.00 lb			
Baseplate	:	-			
Driver	:	161.0 lb			
Estimated Shipping gross weight	:	231.0 lb			

## General Arrangement


Project name	:	Tag Number	:	: 002
Consulting engineer	:	Service	:	
Customer	:	Model	:	: 15951 LC
Customer ref. / PO	:	Quantity of pumps	:	: 1
Quote Number / ID	:	Quoted By (Sales Office)	:	: PFC EQUIPMENT INC
Date last saved	:	Quoted By (Sales Engineer)	:	: Corey Nath
	:		:	



PLAN

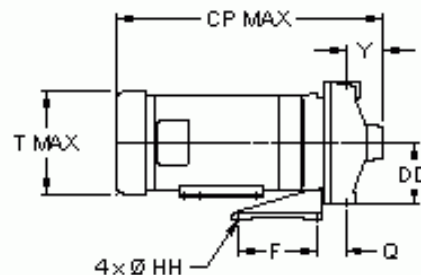

SIDE VIEW

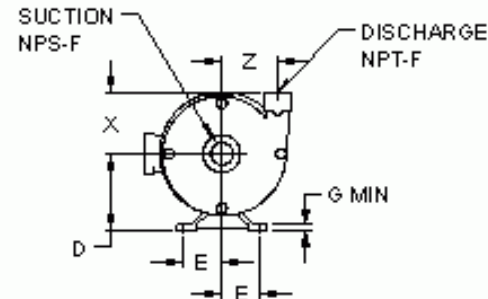

END VIEW

NOT FOR CONSTRUCTION, Unless certified and referenced on order

Units	Frame	Suct(in)	Disch(in)	CP	D	DD	E	F	G	HH	Q	T	X	Y	Z	Weight ea
inches	215JM	2	1.5	25.00	7.50	6.00	3.75	7.50	0.63	0.44	2.81	9.56	6.00	3.62	5.38	231.0

Conditions of Service			Motor Data			
Flow: 100.0 USgpm	Fluid: Cold Water	HP: 10	Encl: TEFC	Phase: 3	Efficiency: Premium	
TDH: 205.0 ft	Temp.: 68.00 deg F	RPM: 3530 rpm	Hz: 60	Voltage: 230/460	S.F.: 1.15	