

|              |                 |
|--------------|-----------------|
| Customer     | Date 20.03.2020 |
| Contact      | Project         |
| Phone number | Project no.     |
| Email        |                 |

# 125SV50CNT4C60

## Operating data


|                           |                   |                           |                |
|---------------------------|-------------------|---------------------------|----------------|
| Pump type                 | Multi-Stage Pumps | Fluid                     | Water          |
| No. of pumps / Reserve    | 1 / 0             | Operating temperature t A | °F 39.2        |
| Nominal flow              | US g.p.m. 0       | pH-value at t A           | 7              |
| Nominal head              | ft 0              | Density at t A            | lb/ft³ 62.4    |
| Static head               | ft 0              | Kin. viscosity at t A     | ft²/s 1.689E-5 |
| Inlet pressure            | psi 0             | Vapor pressure at t A     | psi 14.5       |
| Environmental temperature | °F 68             | Solids                    | 0              |
| Available system NPSH     | ft 0              | Altitude                  | ft 0           |

## Pump data

|                       |                         |                  |                    |
|-----------------------|-------------------------|------------------|--------------------|
| Make                  | Goulds Water Technology | Nominal          | US g.p.m. ( )      |
| Speed                 | rpm 3500                | Flow             | Max- US g.p.m. 725 |
| No. of stages         | 5                       |                  | Min- US g.p.m.     |
| Max. working pressure | psi 278.7               |                  | Nominal ft         |
| Head H(Q=0)           | ft 640                  | Head             | at Qmax ft 336.9   |
| Weight                | lb 1386                 |                  | at Qmin ft 642.6   |
| Efficiency            | %                       | Shaft power      | hp ( )             |
| NPSH 3%               | ft                      | Max. shaft power | hp 87.1            |

## Shaft Seal

|                      |                                 |
|----------------------|---------------------------------|
| Single Seal          | Xylem                           |
| Mechanical Seals     |                                 |
| 1 - Rotating Face    | Carbon                          |
| 2 - Stationary Face  | Silicon Carbide Graphite Filled |
| 3 - Elastomers       | Viton                           |
| 4 - Spring           | 316SS                           |
| 5 - Metal Components | 316SS                           |

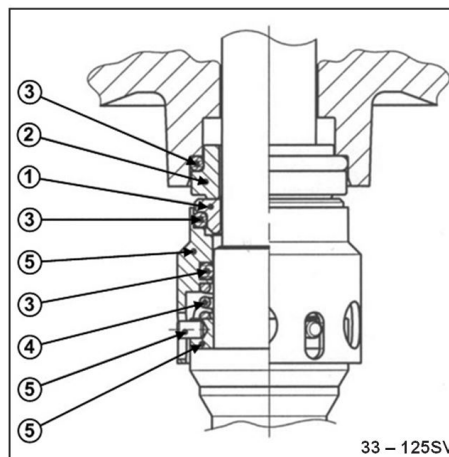

## Motor data

|                 |                                |                  |       |                      |          |                  |          |
|-----------------|--------------------------------|------------------|-------|----------------------|----------|------------------|----------|
| Manufacturer    | Baldor                         | Electric voltage | 230 V | Speed                | 3500 rpm | Insulation class | F        |
| Specific design | 3ph TPE                        |                  |       | Frame size           | 365TSC   | Colour           | RAL 5010 |
| Type            | 230/460V 365TSC (X20A32F5BP2S) |                  |       | Degree of protection | TEPE     |                  |          |
| Rated power     | 75 hp                          | Electric current | 161 A |                      |          |                  |          |


## Remarks:

|              |                 |
|--------------|-----------------|
| Customer     | Date 20.03.2020 |
| Contact      | Project         |
| Phone number | Project no.     |
| Email        |                 |

# 125SV50CNT4C60

## Pump Materials

|                                |                                                           |
|--------------------------------|-----------------------------------------------------------|
| 1 - Pump Body                  | Stainless Steel (AISI 316)                                |
| 2 - Impeller                   | Stainless Steel (AISI 316)                                |
| 3 - Diffuser                   | Stainless Steel (AISI 316)                                |
| 4 - Casing                     | Stainless Steel (AISI 316L)                               |
| 5 - Shaft                      | Duplex Stainless Steel (UNS S 31803)<br>(ASTM Class A536) |
| 6 - Adapter (50HP and higher)  | PPS                                                       |
| 7 - Wear Ring                  | N/A                                                       |
| 8 - Coupling (50HP and higher) | Stainless Steel (AISI 316)                                |
| 9 - Upper Head                 | Stainless Steel (AISI 316)                                |
| 9A - Seal Housing              | Stainless Steel (AISI 316)                                |
| 10 - Mechanical Seal           | Refer Mechanical Seals                                    |
| 11 - Elastomers                | Refer Mechanical Seals                                    |
| 12 - Coupling Guard            | Stainless Steel (AISI 304)                                |
| 13 - Shaft Sleeve and Bushing  | Tungsten carbide                                          |
| 14 - Bushing for Diffuser      | Carbon                                                    |
| 15 - Fill/Drain Plugs          | Stainless Steel (AISI 316)                                |
| 16 - Tie Rods                  | Carbon Steel / Zinc Plated (A29 Gr.1045)                  |

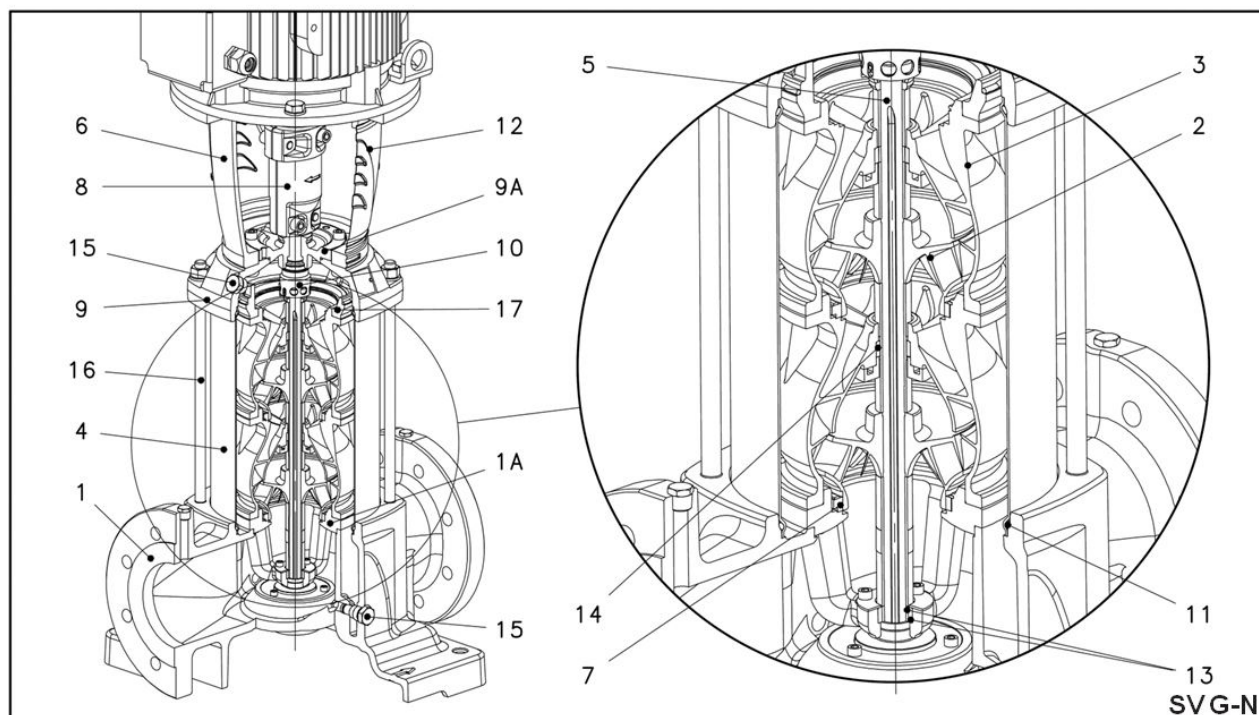

Remarks:

|              |             |            |
|--------------|-------------|------------|
| Customer     | Date        | 20.03.2020 |
| Contact      | Project     |            |
| Phone number | Project no. |            |
| Email        |             |            |

## 125SV50CNT4C60


### Hydraulic Data

| Operating Data Specification |             | Hydraulic data (duty point) | Impeller design |          |
|------------------------------|-------------|-----------------------------|-----------------|----------|
| Flow                         | 0 US g.p.m. | Flow                        | Impeller R      | "        |
| Head                         | 0 ft        | Head                        | Frequency       | 60 Hz    |
| Static head                  | 0 ft        |                             | Speed           | 3500 rpm |

#### Power datas referred to:

Water [100%] ; 39.2°F; 62.4lb/ft³; 1.69E-5ft²/s



Performance according to ISO 9906 - Annex A

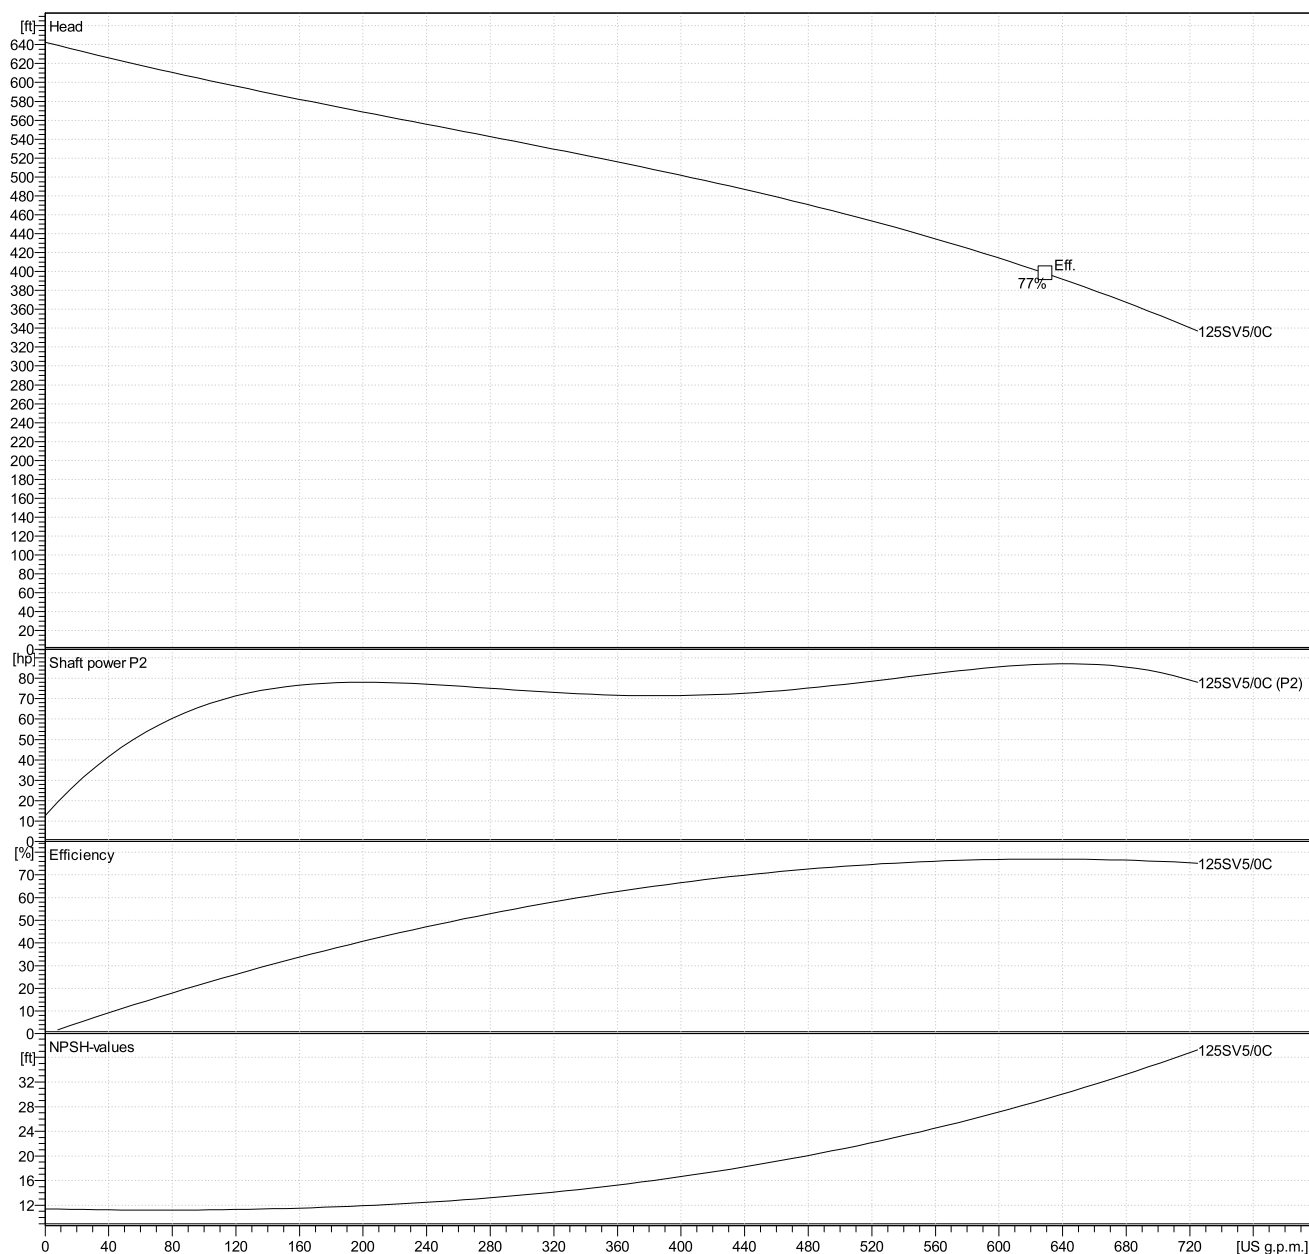


|              |             |            |
|--------------|-------------|------------|
| Customer     | Date        | 20.03.2020 |
| Contact      | Project     |            |
| Phone number | Project no. |            |
| Email        |             |            |

## 125SV50CNT4C60


### Drawing

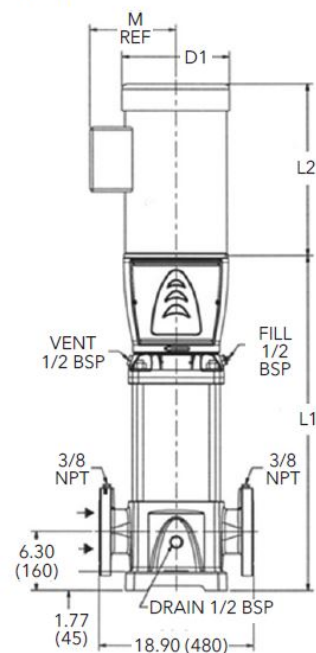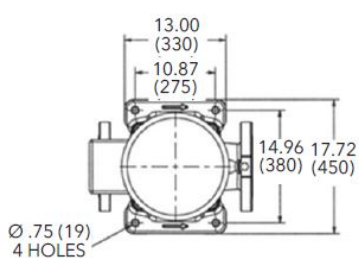


All dimensions are in inches (mm).

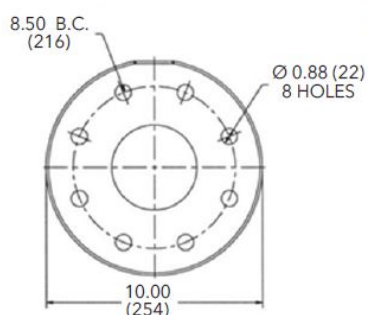


**Cast Iron**  
**5" Class 125 F.F.**

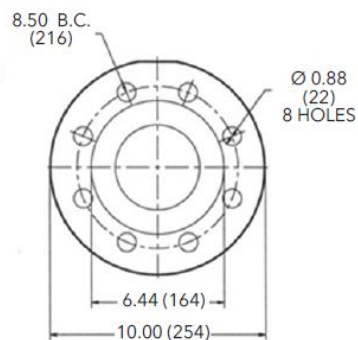

**316SS**  
**5" Class 150 R.F.**



**Cast Iron**  
**5" Class 250 R.F.**



**316SS**  
**5" Class 300 R.F.**

### Dimensions inch

|            |                                  |  |  |  |  |         |
|------------|----------------------------------|--|--|--|--|---------|
| D1 max     | 20 <sup>1</sup> / <sub>4</sub>   |  |  |  |  | Weight  |
| D2         | 13 <sup>1</sup> / <sub>4</sub>   |  |  |  |  | 1386 lb |
| L1         | 52 <sup>1</sup> / <sub>4</sub>   |  |  |  |  |         |
| L2         | 30 <sup>9</sup> / <sub>16</sub>  |  |  |  |  |         |
| M.Ref      | 18 <sup>13</sup> / <sub>16</sub> |  |  |  |  |         |
| NEMA Frame | 365TSC                           |  |  |  |  |         |