

Customer	Date 06.03.2020
Contact	Project
Phone number	Project no.
Email	

5SV7GE4F60

Operating data


Pump type	Multi-Stage Pumps	Fluid	Water
No. of pumps / Reserve	1 / 0	Operating temperature t A	°F 39.2
Nominal flow	US g.p.m. 30	pH-value at t A	7
Nominal head	ft 160	Density at t A	lb/ft³ 62.4
Static head	ft 0	Kin. viscosity at t A	ft²/s 1.689E-5
Inlet pressure	psi 0	Vapor pressure at t A	psi 14.5
Environmental temperature	°F 68	Solids	0
Available system NPSH	ft 0	Altitude	ft 0

Pump data

Make	Goulds Water Technology	Nominal	US g.p.m. 32.3 (32.3)
Speed	rpm 3500	Max-	US g.p.m. 43.9
No. of stages	7	Min-	US g.p.m.
Max. working pressure	psi 104.5	Nominal	ft 185
Head H(Q=0)	ft 240	at Qmax	ft 120.8
Weight	lb 72	at Qmin	ft 241
Efficiency	% 70.38	Shaft power	hp 2.1 (2.1)
NPSH 3%	ft 6.8	Max. shaft power	hp 2.3

Shaft Seal

Single Seal	Xylem
Mechanical Seals	
1 - Rotating Face	Carbon
2 - Stationary Face	Silicon Carbide Graphite Filled
3 - Elastomers	Viton
4 - Spring	316SS
5 - Metal Components	316SS

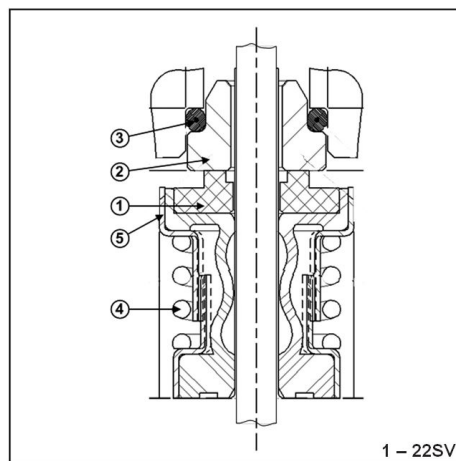

Motor data

Manufacturer	Baldor	Electric voltage	208 V	Speed	3500 rpm	Insulation class	F
Specific design	3ph TPE			Frame size	56C	Colour	RAL 5010
Type	208-230/460V 56C (V08A32E5BB2S)			Degree of protection	TEPE		
Rated power	2 hp	Electric current	5.3 A				


Remarks:

Customer	Date 06.03.2020
Contact	Project
Phone number	Project no.
Email	

5SV7GE4F60

Pump Materials

1 - Pump Body	Cast Iron (ASTM Class 35/40B)
2 - Impeller	Stainless Steel (AISI 304)
3 - Diffuser	Stainless Steel (AISI 304)
4 - Casing	Stainless Steel (AISI 316L)
5 - Shaft	Stainless Steel (AISI 316)
6 - Adapter	Cast Iron (ASTM Class 35/40B)
7 - Base	N/A
8 - Coupling	Aluminum (A384.0-F)
9 - Seal Plate	Stainless Steel (AISI 316L)
10 - Mechanical Seal	Refer Mechanical Seals
11 - Elastomers	Refer Mechanical Seals
12 - Coupling Guard	Stainless Steel (AISI 304)
13 - Shaft Sleeve and Bushing	Tungsten carbide
14 - Fill/Drain Plugs	Stainless Steel (AISI 316)
15 - Tie Rods	Carbon Steel / Zinc Plated (A29 Gr.1045)
16 - Wear Ring	PPS
17 - Seal Gland	Stainless Steel (AISI 316)

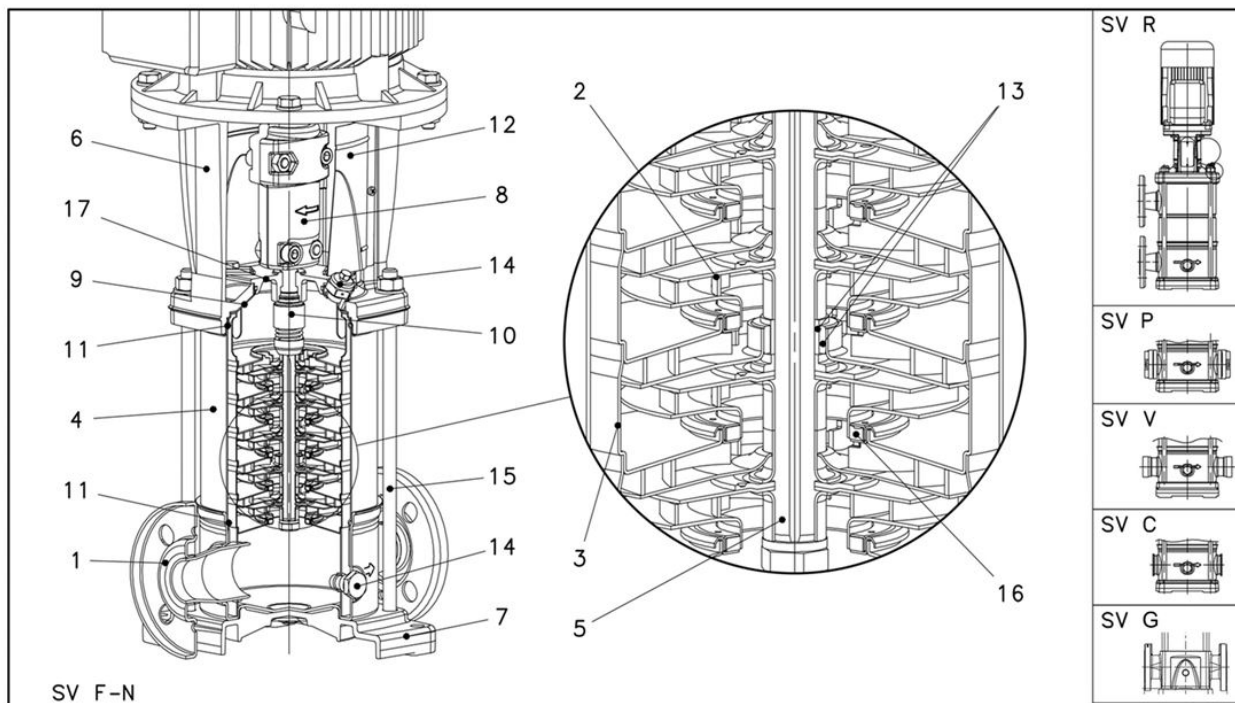

Remarks:

Customer	Date	06.03.2020
Contact	Project	
Phone number	Project no.	
Email		

5SV7GE4F60


Hydraulic Data

Operating Data Specification		Hydraulic data (duty point)		Impeller design	
Flow	30 US g.p.m.	Flow	32.3 US g.p.m.	Impeller R	"
Head	160 ft	Head	185 ft	Frequency	60 Hz
Static head	0 ft			Speed	3500 rpm

Power data referred to:

Water [100%] ; 39.2°F; 62.4lb/ft³; 1.69E-5ft²/s

Performance according to ISO 9906 - Annex A

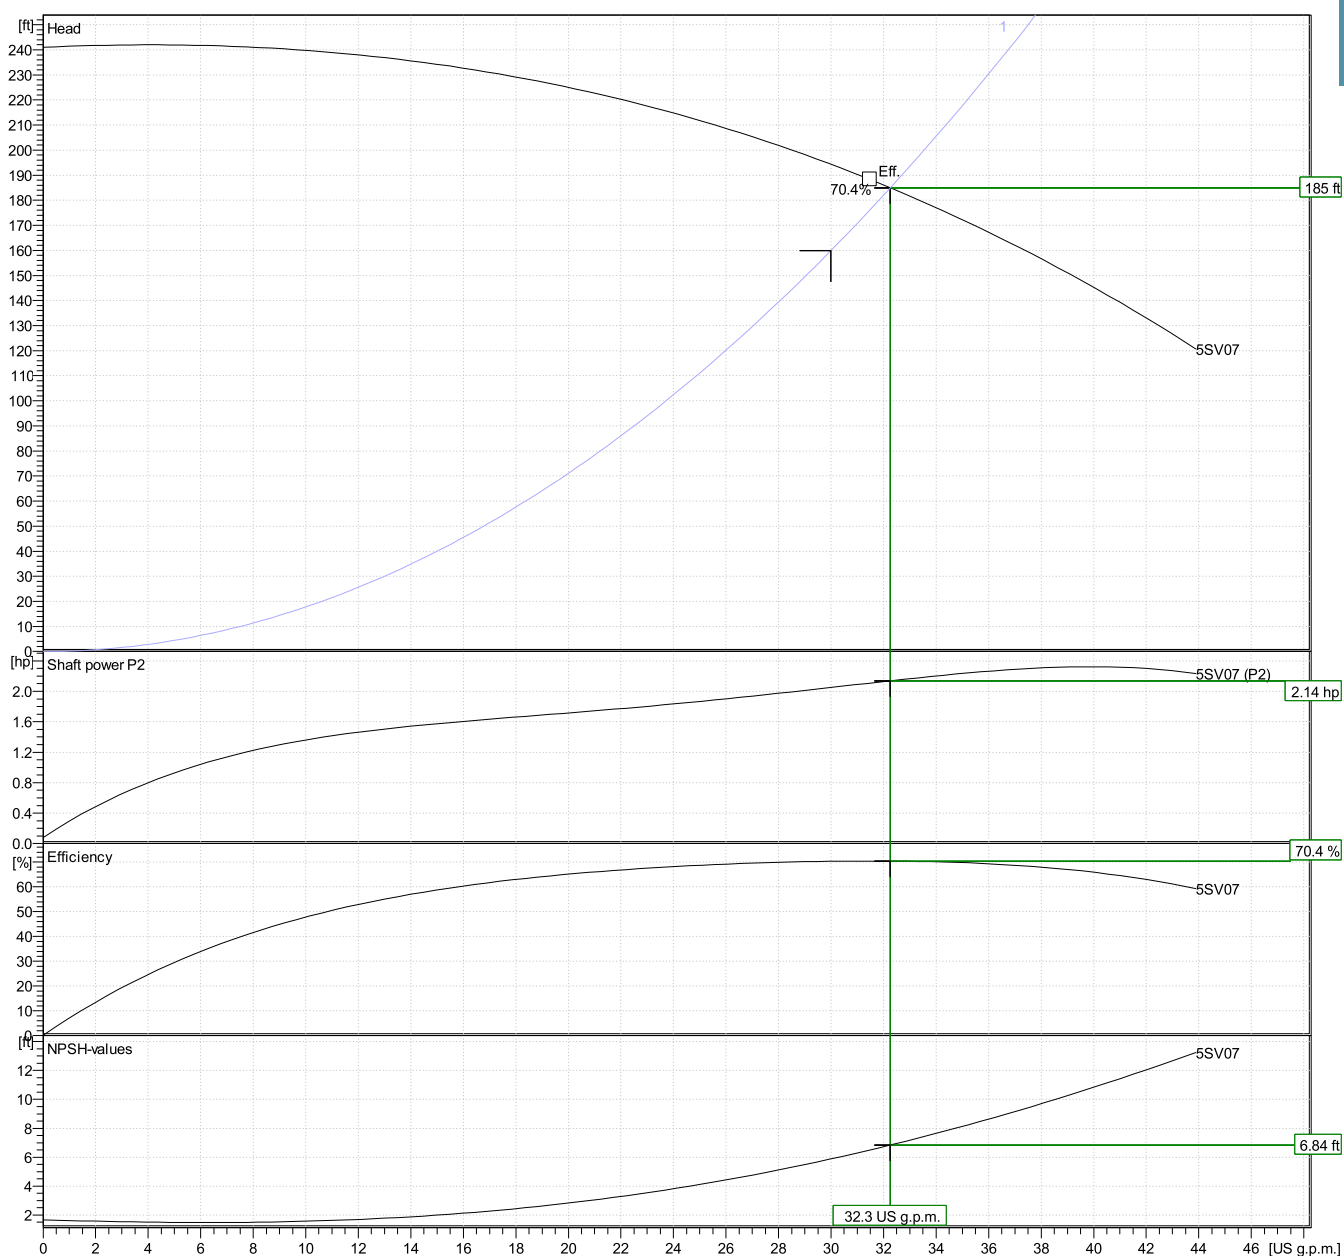

5SV7GE4F60

SVF, SVN

SVG

FLANGES

1-1/4" ANSI CLASS 300 R.F.
F,N CONFIGURATIONS

1-1/4" ANSI CLASS 250 R.F.
G CONFIGURATION

SVR

SVT

1-1/4" NPT

SVP

SVC

D1 max	$7^{3/16}$	NEMA Frame	56C			Weight	72.002	lb
D2	$6^{1/2}$							
L1	$17^{13/16}$							
L2	$11^{3/16}$							
L3	$17^{13/16}$							
L4	$9^{1/2}$							
L5	$16^{13/16}$							
L6	$16^{13/16}$							
M.Ref	$6^{15/16}$							