

PROJECT: _____	UNIT TAG: _____	QUANTITY: _____
REPRESENTATIVE: _____	TYPE OF SERVICE: _____	DATE: _____
ENGINEER: _____	SUBMITTED BY: _____	DATE: _____
CONTRACTOR: _____	APPROVED BY: _____	DATE: _____
	ORDER NO.: _____	DATE: _____





Product photo could vary from the actual product

### CR 1-17 A-B-A-E-HQQE

Vertical, multistage centrifugal pump with suction and discharge ports on the same level. The pump head and base are in cast iron. All other wetted parts are in stainless steel (EN 1.4301)(AISI 304)

Conditions of Service	Pump Data	Motor Data
Flow: _____	Max pressure at stated temperature: 232 psi / 250 °F	Rated power - P2: 2 HP
Head: _____	Liquid temperature range: -4 .. 248 °F	Rated voltage: 115/208-230 V
Efficiency: _____	Maximum ambient temperature: 104 °F	Main frequency: 60 Hz
Liquid: Water	Approvals: CURUS, NSF61	Insulation class: F
Temperature: 68 °F	Shaft seal: HQQE	Motor protection: NONE
NPSH required: ft	Product number: 96081991	Motor type: BALDOR
Viscosity: _____		
Specific Gravity: 1.000		

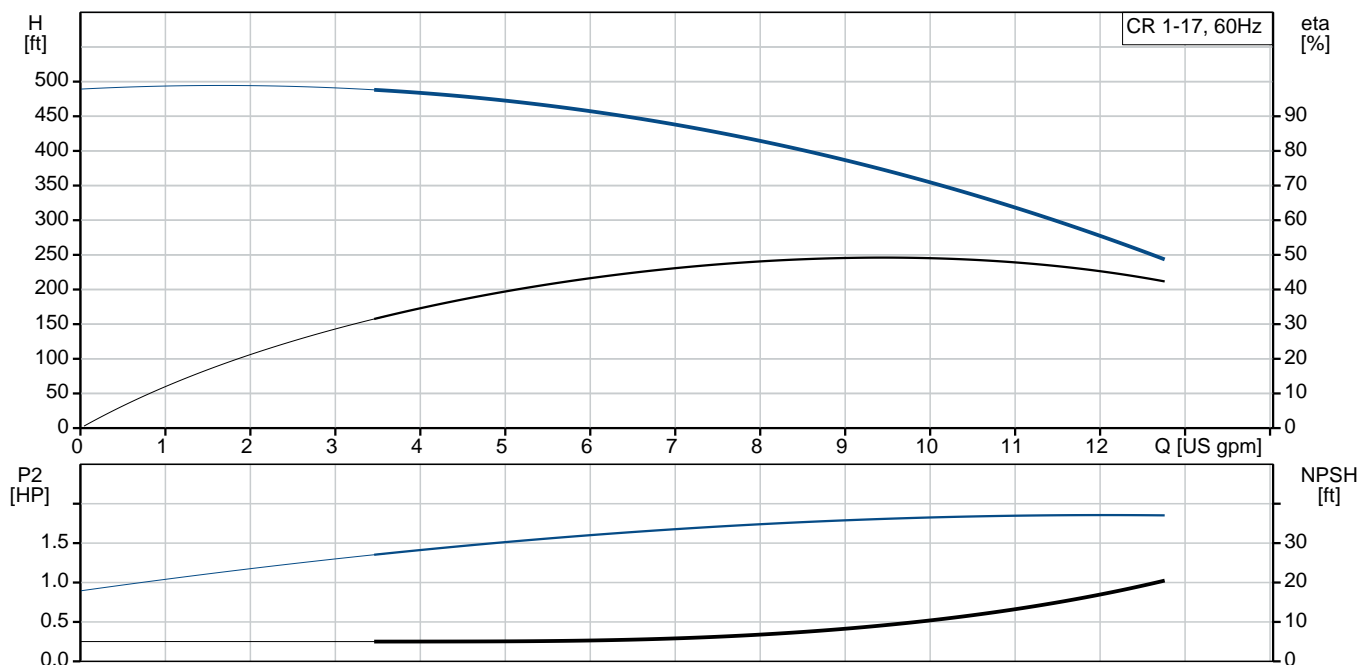

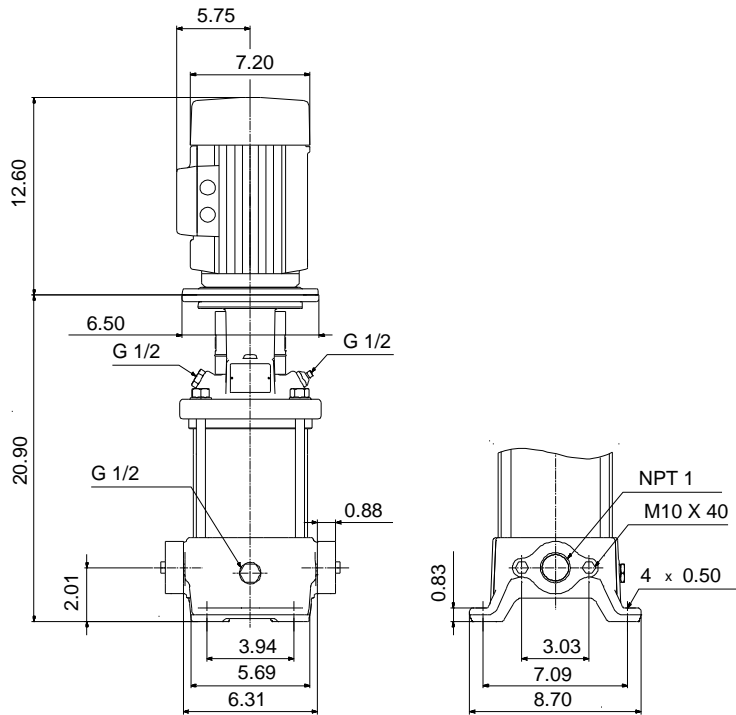


**Materials:**

Base: Cast iron  
EN 1561 EN-GJL-200  
ASTM A48-25B

Impeller: Stainless steel  
AISI 304  
EN 1.4301

Material code: A

Code for rubber: E

Count	Description																																												
1	<p><b>CR 1-17 A-B-A-E-HQQE</b></p>  <p>Product No.: <a href="#">96081991</a></p> <p>Vertical, multistage centrifugal pump with inlet and outlet ports on same the level (inline). The pump head and base are in cast iron – all other wetted parts are in stainless steel. A cartridge shaft seal ensures high reliability, safe handling, and easy access and service. Power transmission is via a rigid split coupling. Pipe connection is via oval flanges with internal NPT threads.</p> <p>The pump is fitted with a 1-phase, fan-cooled asynchronous motor.</p> <p><b>Liquid:</b></p> <table> <tr> <td>Pumped liquid:</td><td>Water</td></tr> <tr> <td>Liquid temperature range:</td><td>-4 .. 248 °F</td></tr> <tr> <td>Selected liquid temperature:</td><td>68 °F</td></tr> <tr> <td>Density:</td><td>62.29 lb/ft³</td></tr> </table> <p><b>Technical:</b></p> <table> <tr> <td>Rated pump speed:</td><td>3499 rpm</td></tr> <tr> <td>Rated flow:</td><td>9.69 US gpm</td></tr> <tr> <td>Rated head:</td><td>381.3 ft</td></tr> <tr> <td>Pump orientation:</td><td>Vertical</td></tr> <tr> <td>Shaft seal arrangement:</td><td>Single</td></tr> <tr> <td>Code for shaft seal:</td><td>HQQE</td></tr> <tr> <td>Approvals on nameplate:</td><td>CURUS,NSF61</td></tr> <tr> <td>Curve tolerance:</td><td>ISO9906:2012 3B</td></tr> </table> <p><b>Materials:</b></p> <table> <tr> <td>Base:</td><td>Cast iron EN 1561 EN-GJL-200 ASTM A48-25B</td></tr> <tr> <td>Impeller:</td><td>Stainless steel EN 1.4301 AISI 304</td></tr> <tr> <td>Bearing:</td><td>SIC</td></tr> </table> <p><b>Installation:</b></p> <table> <tr> <td>Maximum ambient temperature:</td><td>104 °F</td></tr> <tr> <td>Maximum operating pressure:</td><td>232.06 psi</td></tr> <tr> <td>Max pressure at stated temperature:</td><td>232 psi / 250 °F 232 psi / -4 °F</td></tr> <tr> <td>Type of connection:</td><td>Oval / NPT(F)</td></tr> <tr> <td>Size of suction port:</td><td>1 inch</td></tr> <tr> <td>Size of outlet port:</td><td>1 inch</td></tr> <tr> <td>Pressure rating for connection:</td><td>PN 16</td></tr> </table>	Pumped liquid:	Water	Liquid temperature range:	-4 .. 248 °F	Selected liquid temperature:	68 °F	Density:	62.29 lb/ft³	Rated pump speed:	3499 rpm	Rated flow:	9.69 US gpm	Rated head:	381.3 ft	Pump orientation:	Vertical	Shaft seal arrangement:	Single	Code for shaft seal:	HQQE	Approvals on nameplate:	CURUS,NSF61	Curve tolerance:	ISO9906:2012 3B	Base:	Cast iron EN 1561 EN-GJL-200 ASTM A48-25B	Impeller:	Stainless steel EN 1.4301 AISI 304	Bearing:	SIC	Maximum ambient temperature:	104 °F	Maximum operating pressure:	232.06 psi	Max pressure at stated temperature:	232 psi / 250 °F 232 psi / -4 °F	Type of connection:	Oval / NPT(F)	Size of suction port:	1 inch	Size of outlet port:	1 inch	Pressure rating for connection:	PN 16
Pumped liquid:	Water																																												
Liquid temperature range:	-4 .. 248 °F																																												
Selected liquid temperature:	68 °F																																												
Density:	62.29 lb/ft³																																												
Rated pump speed:	3499 rpm																																												
Rated flow:	9.69 US gpm																																												
Rated head:	381.3 ft																																												
Pump orientation:	Vertical																																												
Shaft seal arrangement:	Single																																												
Code for shaft seal:	HQQE																																												
Approvals on nameplate:	CURUS,NSF61																																												
Curve tolerance:	ISO9906:2012 3B																																												
Base:	Cast iron EN 1561 EN-GJL-200 ASTM A48-25B																																												
Impeller:	Stainless steel EN 1.4301 AISI 304																																												
Bearing:	SIC																																												
Maximum ambient temperature:	104 °F																																												
Maximum operating pressure:	232.06 psi																																												
Max pressure at stated temperature:	232 psi / 250 °F 232 psi / -4 °F																																												
Type of connection:	Oval / NPT(F)																																												
Size of suction port:	1 inch																																												
Size of outlet port:	1 inch																																												
Pressure rating for connection:	PN 16																																												



Company name: PFC Equipment

Created by:

Phone:

Date: 4/20/2020

Count	Description
	Flange size for motor: 56C
	<b>Electrical data:</b>
	Motor standard: NEMA
	Motor type: BALDOR
	Rated power - P2: 2 HP
	Power (P2) required by pump: 2 HP
	Main frequency: 60 Hz
	Rated voltage: 1 x 115/208-230 V
	Service factor: 1.15
	Rated current: 23,0/12,7-11,5 A
	Rated speed: 3450 rpm
	Number of poles: 2
	Insulation class (IEC 85): F
	Motor Number: 84Z04010
	<b>Controls:</b>
	Frequency converter: NONE
	<b>Others:</b>
	Net weight: 92.1 lb
	Gross weight: 107 lb
	Shipping volume: 8.26 ft <sup>3</sup>
	Country of origin: US
	Custom tariff no.: 8413.70.2040



Company name: PFC Equipment


Created by:

Phone:


Date:

4/20/2020

## 96081991 CR 1-17 A-B-A-E-HQQE 60 Hz

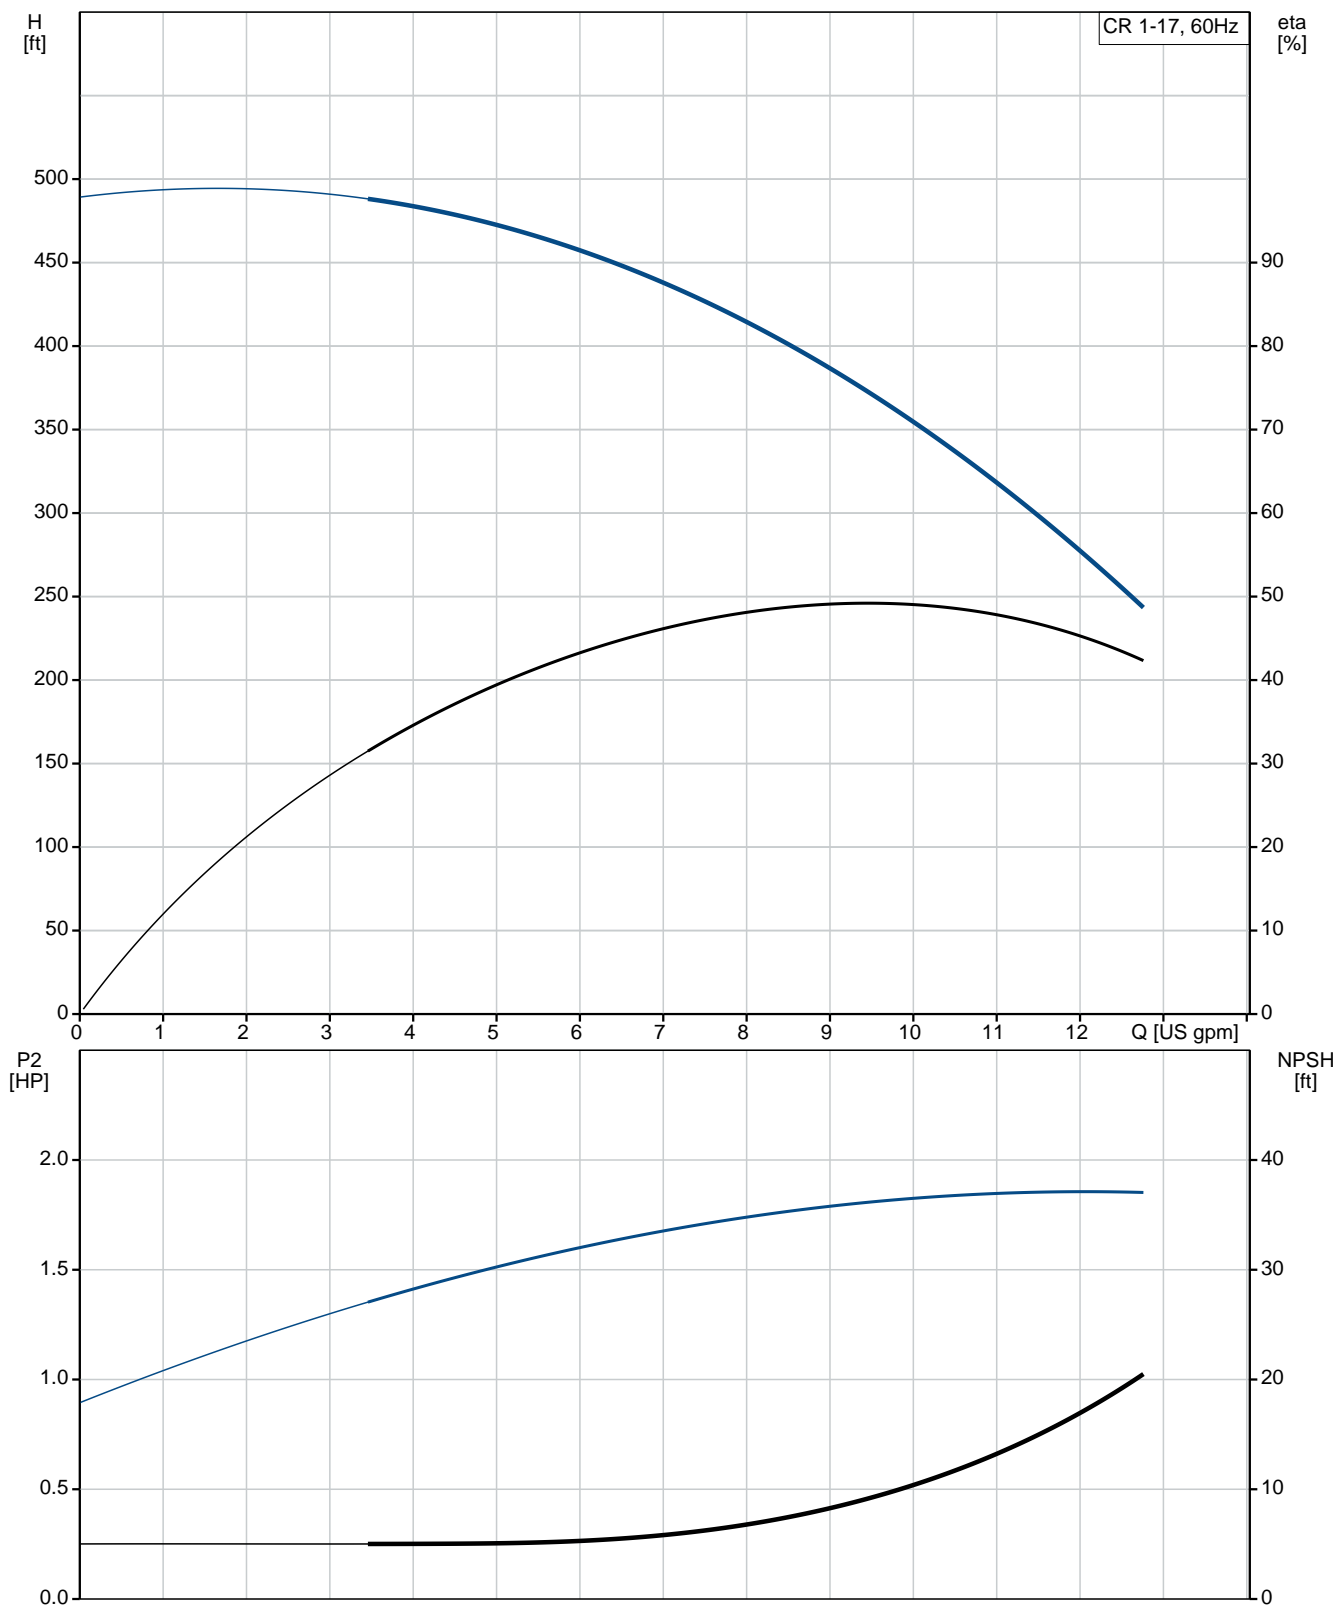

Description	Value
<b>General information:</b>	
Product name:	CR 1-17 A-B-A-E-HQQE
Product No.:	96081991
EAN:	5700395167290
	5700395167290
<b>Technical:</b>	
Rated pump speed:	3499 rpm
Rated flow:	9.69 US gpm
Rated head:	381.3 ft
Maximum head:	502 ft
Stages:	17
Impellers:	17
Number of reduced-diameter impellers:	0
Low NPSH:	N
Pump orientation:	Vertical
Shaft seal arrangement:	Single
Code for shaft seal:	HQQE
Approvals on nameplate:	CURUS,NSF61
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	A
Cooling:	TEFC
<b>Materials:</b>	
Base:	Cast iron
	EN 1561 EN-GJL-200
	ASTM A48-25B
Impeller:	Stainless steel
	EN 1.4301
	AISI 304
Material code:	A
Code for rubber:	E
Bearing:	SIC
<b>Installation:</b>	
Maximum ambient temperature:	104 °F
Maximum operating pressure:	232.06 psi
Max pressure at stated temperature:	232 psi / 250 °F
	232 psi / -4 °F
Type of connection:	Oval / NPT(F)
Size of suction port:	1 inch
Size of outlet port:	1 inch
Pressure rating for connection:	PN 16
Flange size for motor:	56C
Connect code:	B
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	-4 .. 248 °F
Selected liquid temperature:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Motor standard:	NEMA
Motor type:	BALDOR
Rated power - P2:	2 HP
Power (P2) required by pump:	2 HP
Main frequency:	60 Hz

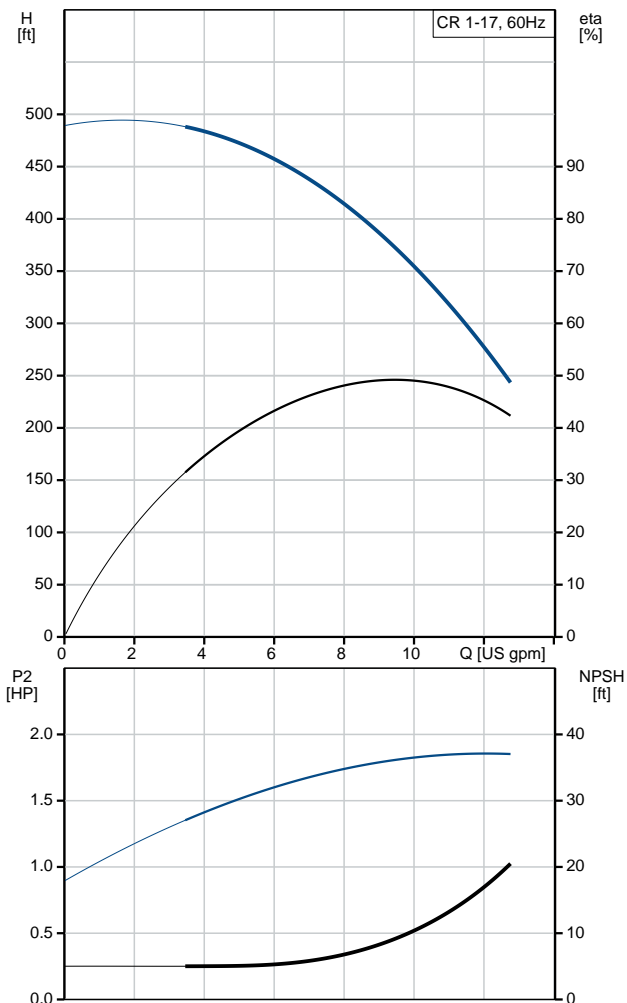



**Company name:** PFC Equipment

**Created by:**

**Phone:**


**Date:** 4/20/2020

Description	Value
Rated voltage:	1 x 115/208-230 V
Service factor:	1.15
Rated current:	23,0/12,7-11,5 A
Load current:	25.4/12.7 A
Rated speed:	3450 rpm
Number of poles:	2
Insulation class (IEC 85):	F
Motor protection:	NONE
Motor Number:	84Z04010
<b>Controls:</b>	
Frequency converter:	NONE
<b>Others:</b>	
Net weight:	92.1 lb
Gross weight:	107 lb
Shipping volume:	8.26 ft <sup>3</sup>
Country of origin:	US
Custom tariff no.:	8413.70.2040





**96081991 CR 1-17 A-B-A-E-HQQE 60 Hz**

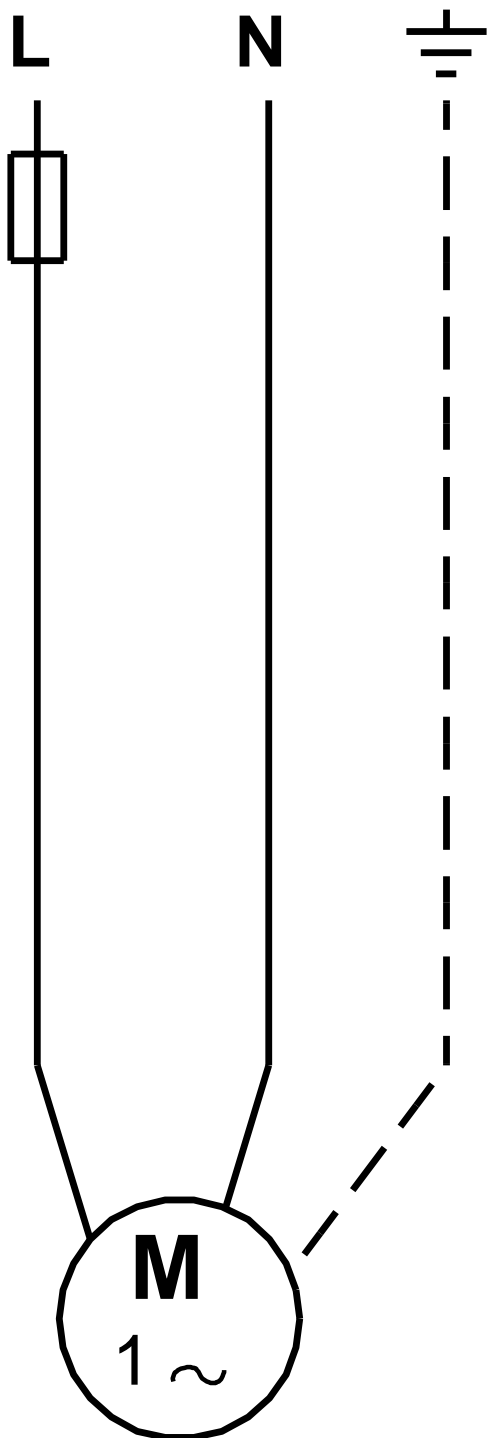

All units are [in] unless otherwise presented.