


PROJECT: _____	UNIT TAG: _____	QUANTITY: _____
REPRESENTATIVE: _____	TYPE OF SERVICE: _____	DATE: _____
ENGINEER: _____	SUBMITTED BY: _____	DATE: _____
CONTRACTOR: _____	APPROVED BY: _____	DATE: _____
	ORDER NO.: _____	DATE: _____


### 5S07-18




Submersible pumps in stainless steel. EN 1.4301 (AISI 304). EN 1.4401 (AISI 316). EN 1.4539 (AISI 904L).  
 Typical application: Ground water, Irrigation, Mining, Fountain, Off-shore etc.

Product photo could vary from the actual product

Conditions of Service	Pump Data	Motor Data
Flow: _____	Approvals: CE,EAC,CSACOMP,UR	Rated power - P2: 0.75 HP
Head: _____	Product number: 81595185	Rated voltage: 230 V
Efficiency: _____		Main frequency: 60 Hz
Liquid: Water		Enclosure class: IP68
Temperature: 68 °F		Insulation class: B
NPSH required: ft		Motor protection: CONTACT
Viscosity: _____		Thermal protection: internal
Specific Gravity: 1.000		Motor type: MS402

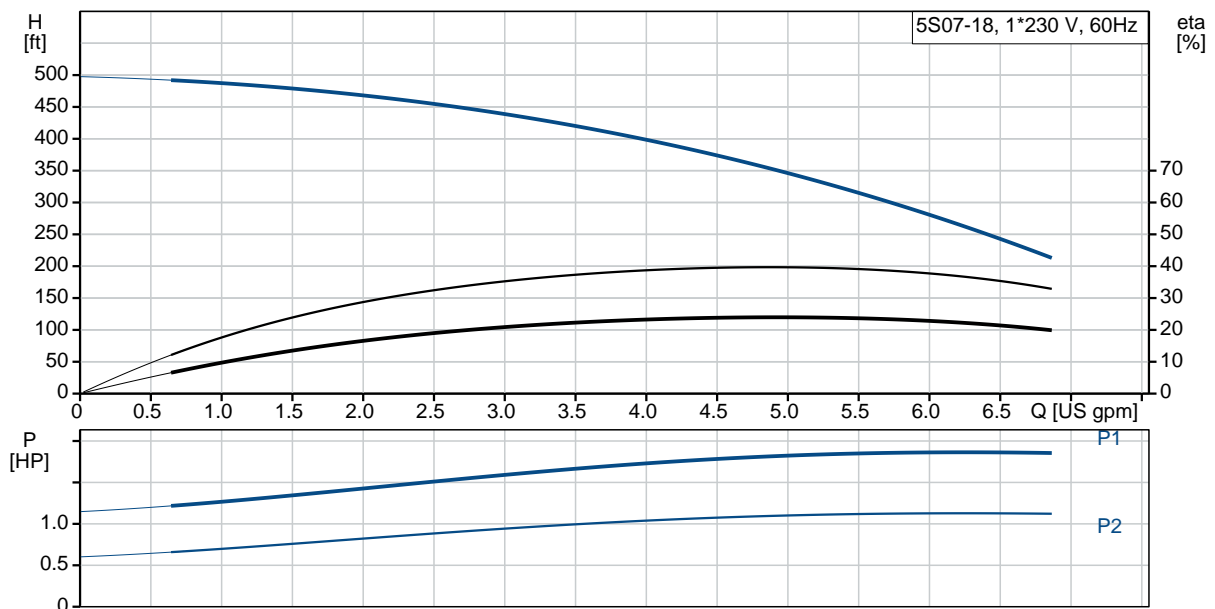

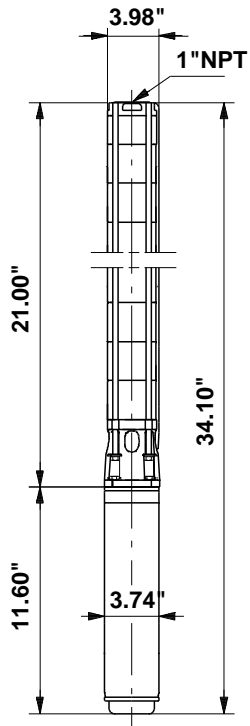

**Materials:**

- Pump: Stainless steel  
EN 1.4301  
AISI 304
- Impeller: Stainless steel  
EN 1.4301  
AISI 304
- Motor: Stainless steel  
DIN W.-Nr. 1.4301  
AISI 304




Company name:

Created by:

Phone:

Date:

5/18/2020

Count	Description
1	<p></p> <p>Product No.: <a href="#">81595185</a> Multi-stage submersible pump for raw water supply, groundwater lowering and pressure boosting. The pump is suitable for pumping clean, thin, non-aggressive liquids without solid particles or fibers.</p> <p>The pump is made entirely of Stainless steel DIN W.-Nr. EN 1.4301 and suitable for horizontal and vertical installation. The pump is fitted with a built-in non-return valve.</p> <p>The motor is a 1-phase motor of the canned type with a sand shield, liquid-lubricated bearings and pressure-equalizing diaphragm.</p> <p><b>Liquid:</b> Pumped liquid: Water Maximum liquid temperature: 140 °F Max liquid temperature at 0.15 m/sec: 104 °F Selected liquid temperature: 68 °F Density: 62.29 lb/ft<sup>3</sup></p> <p><b>Technical:</b> Pump speed on which pump data is based: 3450 rpm Rated flow: 4.4 US gpm Rated head: 351.1 ft Shaft seal for motor: LIPSEAL Approvals on nameplate: CE,EAC,CSACOMP,UR Curve tolerance: ISO9906:2012 3B Motor version: T40 Specification for shaft end: SPLINE</p> <p><b>Materials:</b> Pump: Stainless steel EN 1.4301 AISI 304 Impeller: Stainless steel EN 1.4301 AISI 304</p>



Company name:

Created by:

Phone:

Date:

5/18/2020


Count	Description
	Motor: Stainless steel DIN W.-Nr. 1.4301 AISI 304
	<b>Installation:</b> Maximum ambient pressure: 217.56 psi Pump outlet: 1"NPT Motor diameter: 4 inch
	<b>Electrical data:</b> Motor type: MS402 Type of motor: RSIR Rated power - P2: 0.75 HP Power (P2) required by pump: 0.75 HP Main frequency: 60 Hz Rated voltage: 1 x 230 V Service factor: 1.50 Rated current: 8.4 A Starting current: 610 % Cos phi - power factor: 0.75 Rated speed: 3450 rpm Start. method: direct-on-line Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): B Built-in temperature transmitter: No Motor Number: 79952103
	<b>Others:</b> ErP status: EuP Standalone/Prod. Net weight: 29.8 lb Gross weight: 33.1 lb Shipping volume: 352 ft <sup>3</sup> Country of origin: US Custom tariff no.: 8413.70.2004



Company name:  
Created by:  
Phone:

Date: 5/18/2020

### 81595185 5S07-18 60 Hz




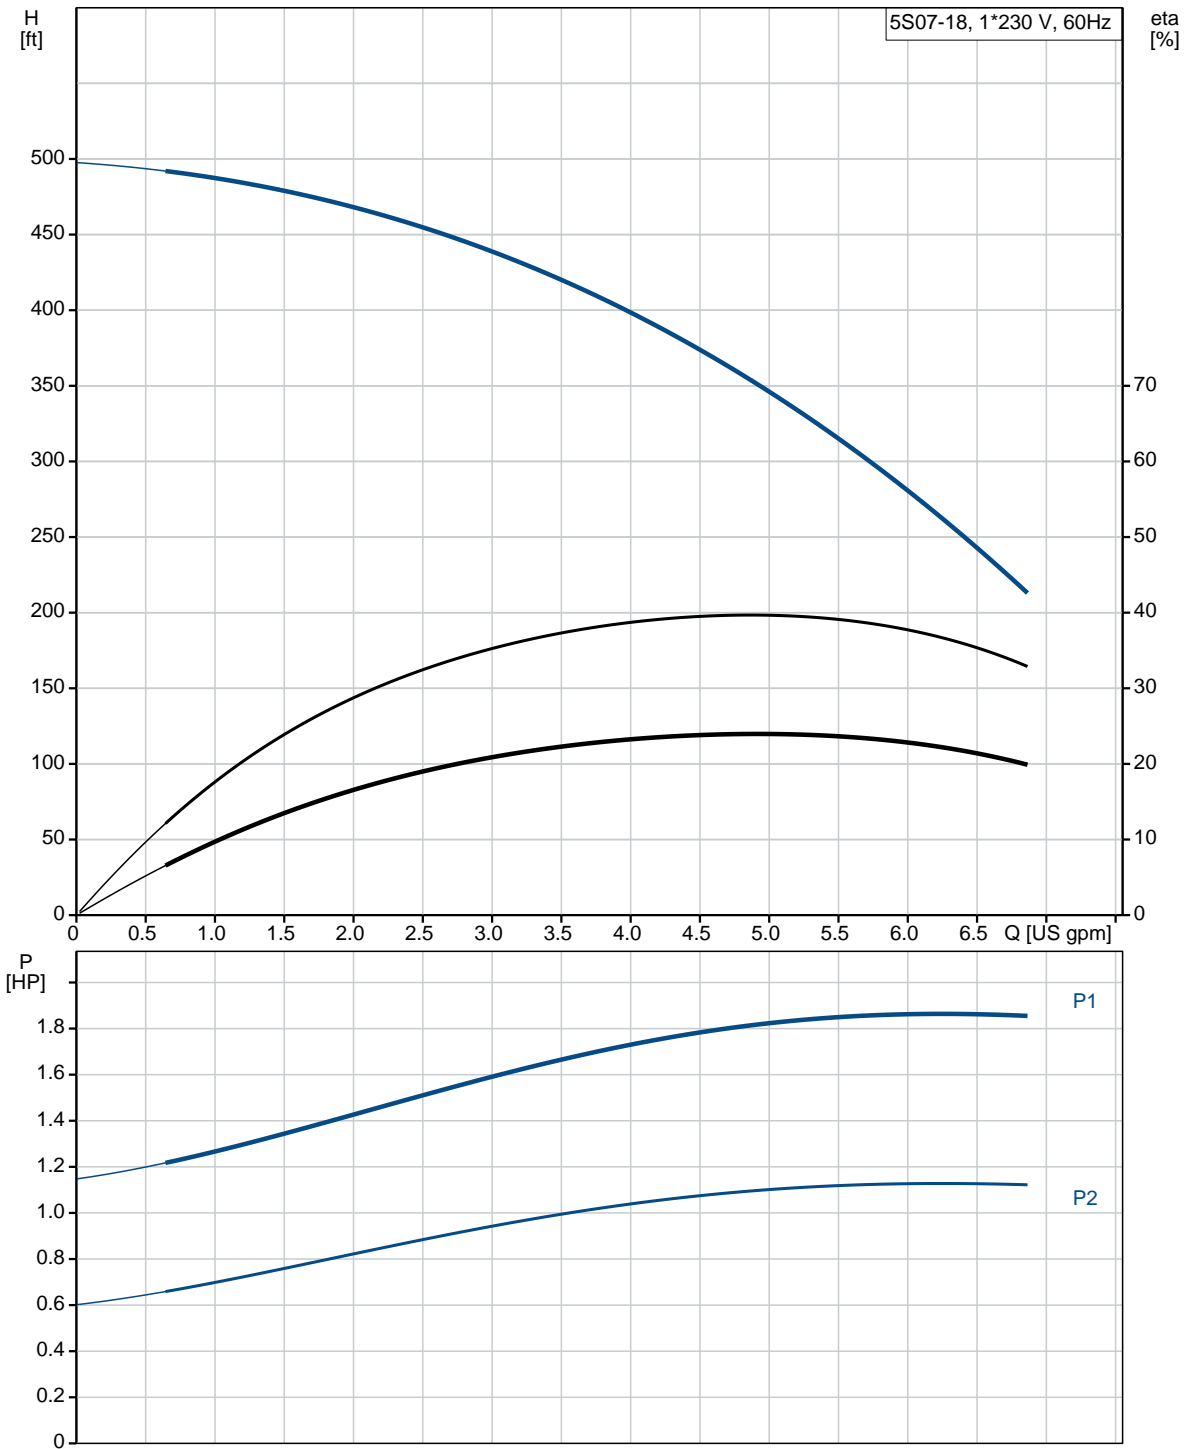




Company name:  
Created by:  
Phone:

Date: 5/18/2020

Description	Value
<b>General information:</b>	
Product name:	5S07-18
Product No.:	81595185
EAN:	5700394509787
	5700394509787
<b>Technical:</b>	
Pump speed on which pump data is based:	3450 rpm
Rated flow:	4.4 US gpm
Rated head:	351.1 ft
Stages:	18
Impeller reduc.:	NONE
Shaft seal for motor:	LIPSEAL
Approvals on nameplate:	CE,EAC,CSACOMP, UR
Curve tolerance:	ISO9906:2012 3B
Pump Number:	08010018
Model:	A
Valve:	YES
Motor version:	T40
Specification for shaft end:	SPLINE
<b>Materials:</b>	
Pump:	Stainless steel EN 1.4301 AISI 304
Impeller:	Stainless steel EN 1.4301 AISI 304
Motor:	Stainless steel DIN W.-Nr. 1.4301 AISI 304
<b>Installation:</b>	
Maximum ambient pressure:	217.56 psi
Pump outlet:	1"NPT
Motor diameter:	4 inch
<b>Liquid:</b>	
Pumped liquid:	Water
Maximum liquid temperature:	140 °F
Max liquid temperature at 0.15 m/sec:	104 °F
Selected liquid temperature:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Motor type:	MS402
Type of motor:	RSIR
Applic. motor:	GRUNDFOS
Rated power - P2:	0.75 HP
Power (P2) required by pump:	0.75 HP
KVA code:	N

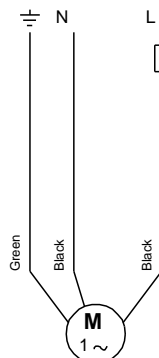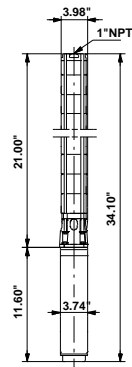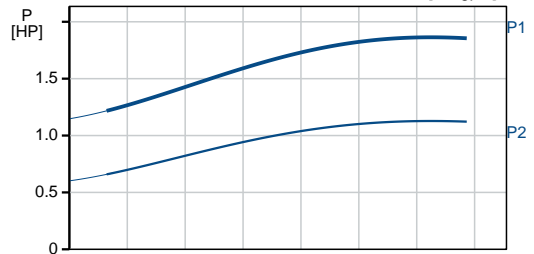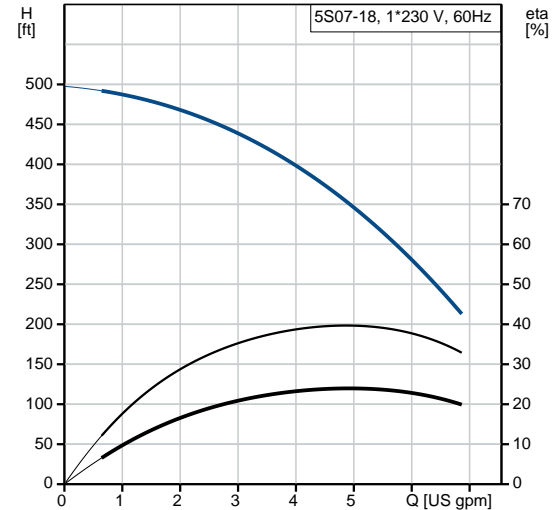



Company name:

Created by:

Phone:

Date:

5/18/2020


Description	Value
Main frequency:	60 Hz
Rated voltage:	1 x 230 V
Service factor:	1.50
Rated current:	8.4 A
Starting current:	610 %
Cos phi - power factor:	0.75
Rated speed:	3450 rpm
Axial load max:	772 lb
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	B
Motor protection:	CONTACT
Thermal protec:	internal
Built-in temperature transmitter:	No
Motor Number:	79952103
<b>Others:</b>	
ErP status:	EuP Standalone/Prod.
Net weight:	29.8 lb
Gross weight:	33.1 lb
Shipping volume:	352 ft <sup>3</sup>
Sales region:	Namreg
Country of origin:	US
Custom tariff no.:	8413.70.2004



Company name:  
Created by:  
Phone:

Date: 5/18/2020


**81595185 5S07-18 60 Hz**

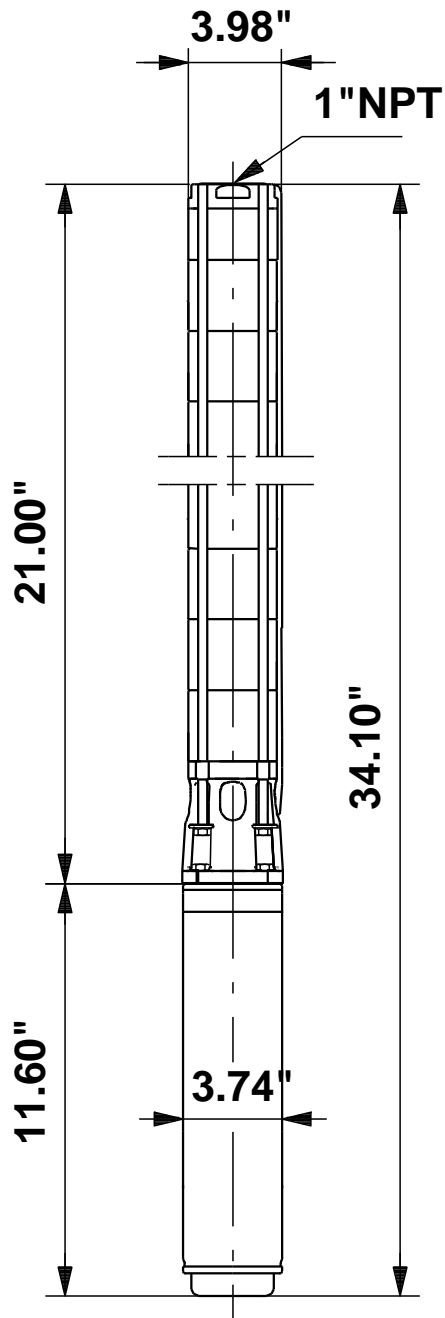

Note! All units are in [in] unless otherwise stated.  
Disclaimer: This simplified dimensional drawing does not show all details.



**81595185 5S07-18 60 Hz**

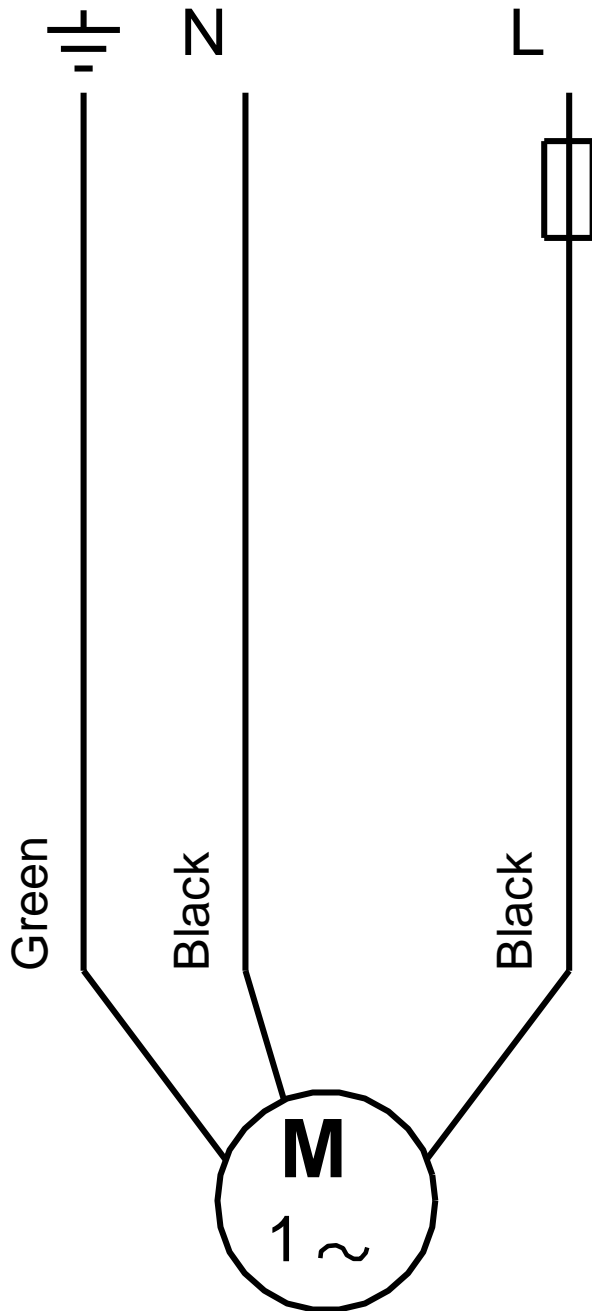

All units are [in] unless otherwise presented.