


The **MINI** Pump is designed to transfer corrosive chemicals from small drums and storage vessels. Electric or Air powered motors provide additional versatility for low volume transfer applications. The ergonomic design makes the **MINI** Pump an ideal solution for laboratory use.

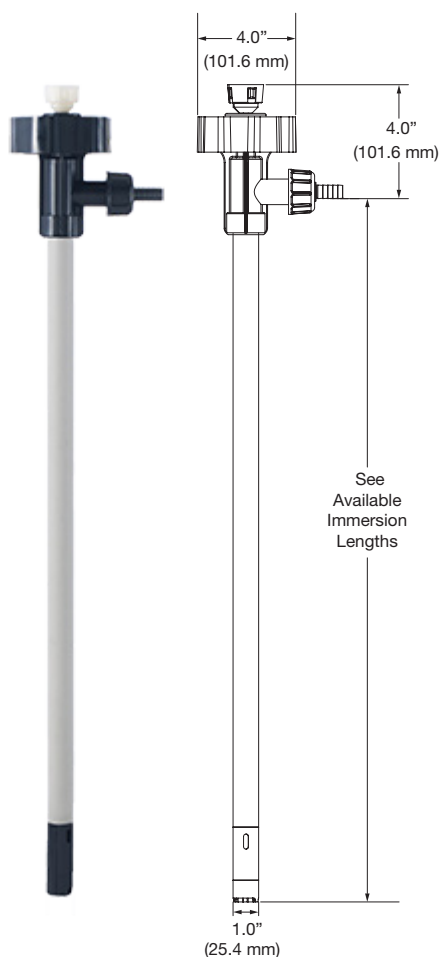

Common Applications

- Corrosive Chemicals
- Acids
- Alkalies
- Life Sciences
- Organic Compounds

Features

- Lightweight & Portable
- Designed for Low-Volume Applications
- Chemically Resistant
- Electric or Air Powered

Technical Specifications

Pump Design:	Sealless / Centrifugal
Discharge:	1/2" (12,7 mm) Hose Barb
Wetted Materials:	Polypropylene, Carbon Graphite, Hastelloy C-276
Motor Drive Options:	110V & 220V Single Phase, Pneumatic
Maximum Viscosity: <i>(based on motor option)</i>	250 cps (mPas)
Maximum Discharge Pressure:	6.0 psi (0,41 bar)
Maximum Flow Rate: <i>(based on water)</i>	5.5 gpm (20,8 lpm)
Maximum Temperature:	130°F (55°C)
Duty Cycle:	Intermittent
Available Immersion Lengths:	20" (500 mm), 27" (700 mm), 39" (1000 mm)