



Customer	Date	31.12.2020
Contact	Project	
Phone number	Project no.	
Email		

5HM02N05T6PBQE

Operating data

Pump type	Single head pump	Fluid	Water
No. of pumps / Reserve	1 / 0	Operating temperature t A	°F 39.2
Nominal flow	US g.p.m. 0	pH-value at t A	7
Nominal head	ft 0	Density at t A	lb/ft³ 62.4
Static head	ft 0	Kin. viscosity at t A	ft²/s 1.689E-5
Inlet pressure	psi 0	Vapor pressure at t A	psi 14.5
Environmental temperature	°F 68	Solids	0
Available system NPSH	ft 0	Altitude	ft 0

Pump data

Make	Goulds	Nominal	US g.p.m.	()
Speed	rpm 3500	Max-	US g.p.m.	44.9
No. of stages	2	Min-	US g.p.m.	
Max. casing pressure	psi	Nominal	ft	
Max. working pressure	psi 30.2	at Qmax	ft	25
Head H(Q=0)	ft 70	at Qmin	ft	69.5
Weight	lb 18	Shaft power	hp	()
		Max. shaft power	hp	.6
		Efficiency	%	
		NPSH 3%	ft	

Pump Materials

Adapter	Aluminium
Bolts and screws	Stainless steel
Diffuser	Stainless steel
Fill / drain plugs	Stainless steel
Impeller	Stainless steel 316
Pump Body	Stainless steel
Seal Housing	Stainless steel
Shaft	Stainless steel
Wear Ring	Technopolymer (PPS)

Shaft Seal

Rotating Part	Silicon Carbide
Stationary Part	Carbon, resin-impregnated
Elastomers	EPDM
Springs	AISI 316
Other Components	AISI 316

Motor data

Specific design	IE3 Three phase surface motor		
Type	SM71HM..A/UL305		
Rated power	0.75 hp	Electric voltage	208 V
Speed	3455 rpm	Electric current	2.64 A
Frame size	56	Degree of protection	55
Colour	RAL 5010	Insulation class	155 (F)



Customer	Date	31.12.2020
Contact	Project	
Phone number	Project no.	
Email		

5HM02N05T6PBQE


Hydraulic Data

Operating Data Specification		Hydraulic data (duty point)		Impeller design	
Flow	0 US g.p.m.	Flow		Impeller R	3"
Head	0 ft	Head		Frequency	60 Hz
Static head	0 ft			Speed	3500 rpm

Power data referred to:

Water [100%] ; 39.2°F; 62.4lb/ft³; 1.69E-5ft²/s

Performance according to ANSI/HI 14.6 - Grade 2B

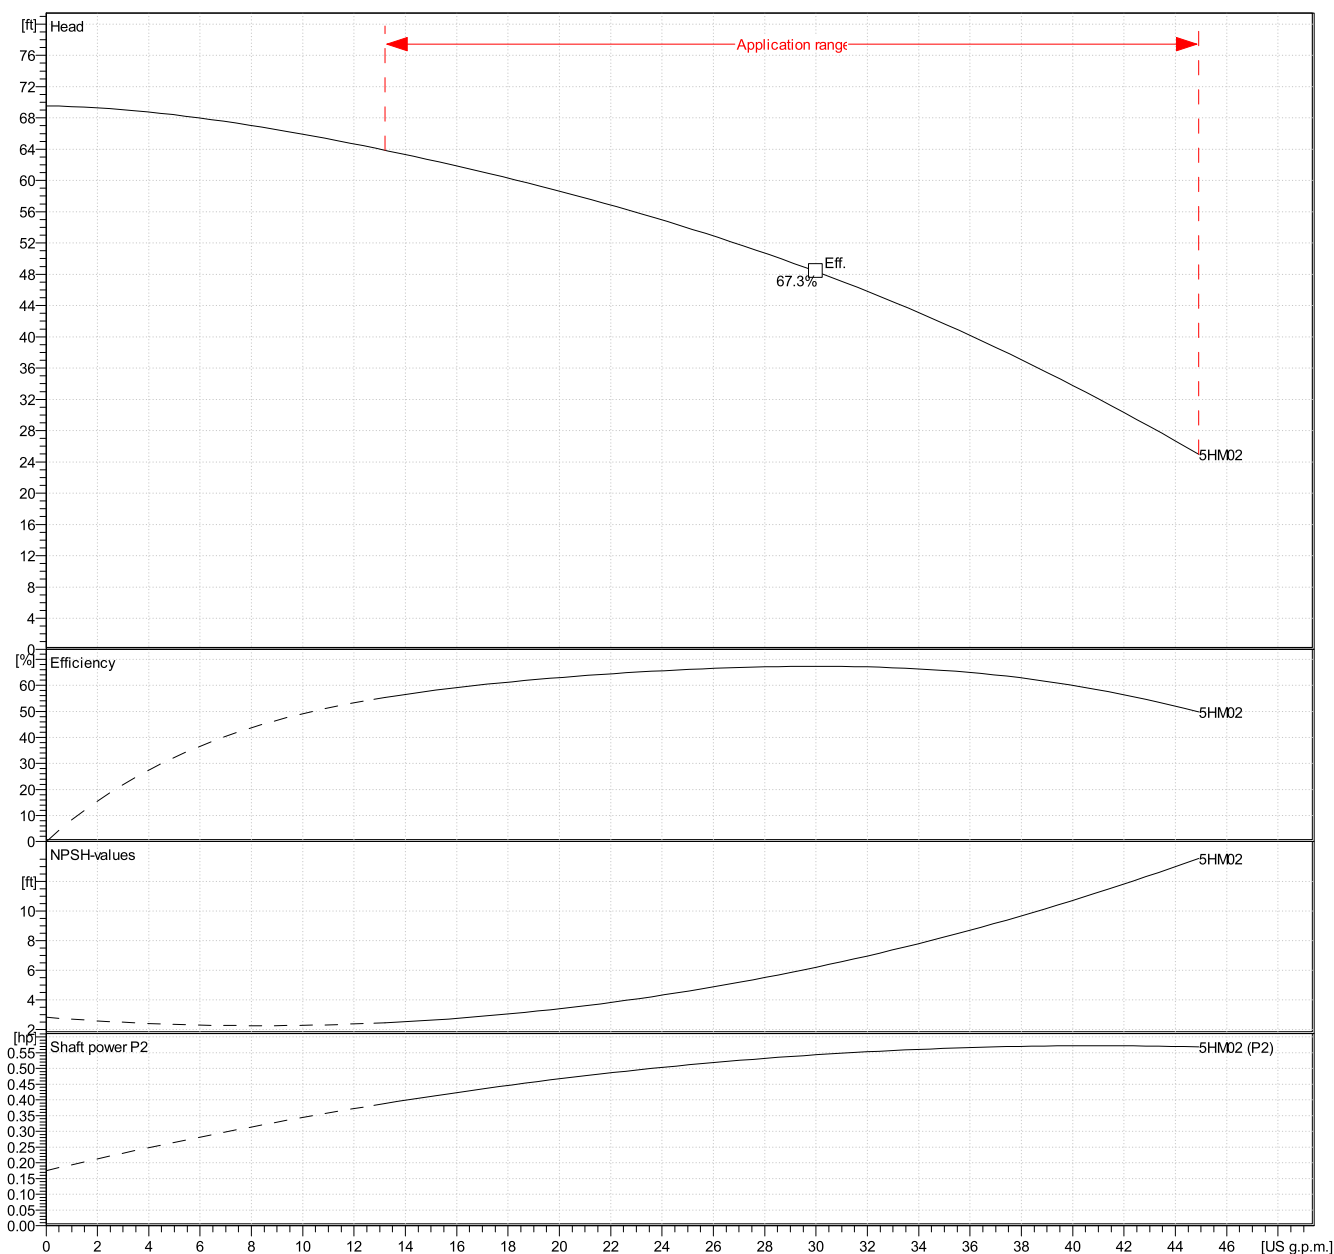




Customer	Date	31.12.2020
Contact	Project	
Phone number	Project no.	
Email		

5HM02N05T6PBQE

Drawing

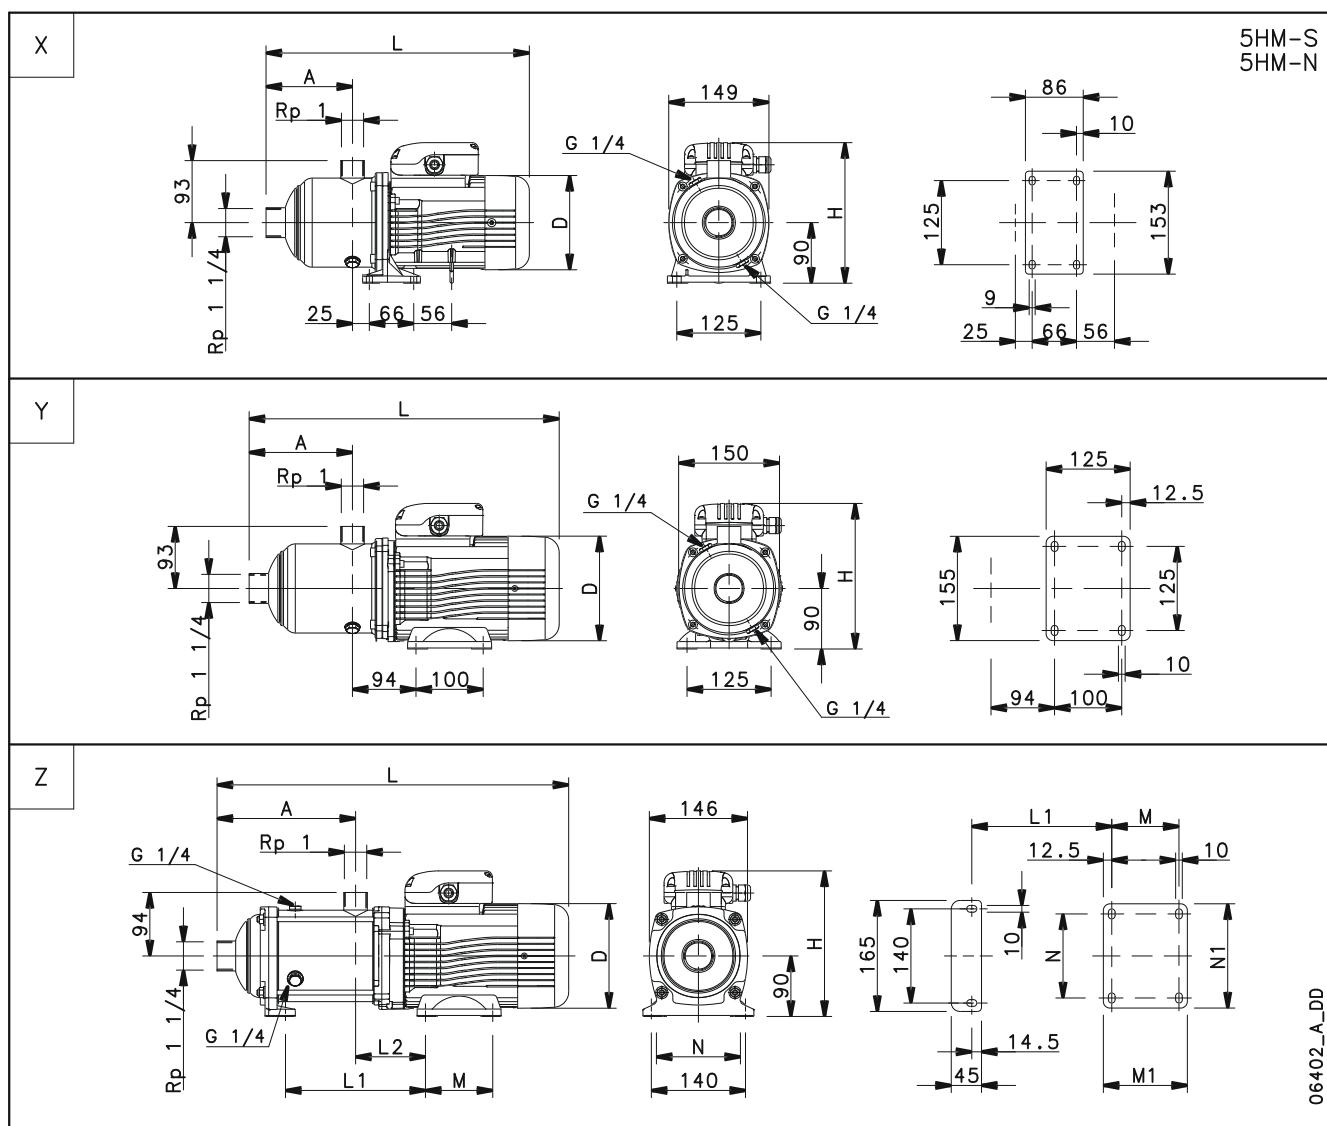

Dimensions inch

A	4 ¹ / ₈					Weight
D	5 ¹ / ₂					17.637 lb
H	8 ⁷ / ₈					
L	14 ⁷ / ₁₆					
Ref. Drawing	X					