


PROJECT:	_____	UNIT TAG:	_____	QUANTITY:	_____
REPRESENTATIVE:	_____	TYPE OF SERVICE:	_____	DATE:	_____
ENGINEER:	_____	SUBMITTED BY:	_____	DATE:	_____
CONTRACTOR:	_____	APPROVED BY:	_____	DATE:	_____
		ORDER NO.:	_____	DATE:	_____






### CMBE TWIN 3-51 I-X-C-B-D-G

The CMBE TWIN booster systems consist of two to four Grundfos CMBE booster connected in parallel, designed for the transfer and pressure boosting of clean water.

Product photo could vary from the actual product


Conditions of Service	Pump Data	Motor Data
Efficiency: _____	Liquid temperature range: 32 .. 140 °F	Rated power - P2: 1 HP
Liquid: Water	Maximum ambient temperature: 104 °F	Rated voltage: 115 V
Temperature: 68 °F	Shaft seal: AQQE	Main frequency: 60 Hz
NPSH required: psi	Flange standard: INTERNAL NPT THREAD	Insulation class: F
Specific Gravity: 1.000	Product number: 99503873	

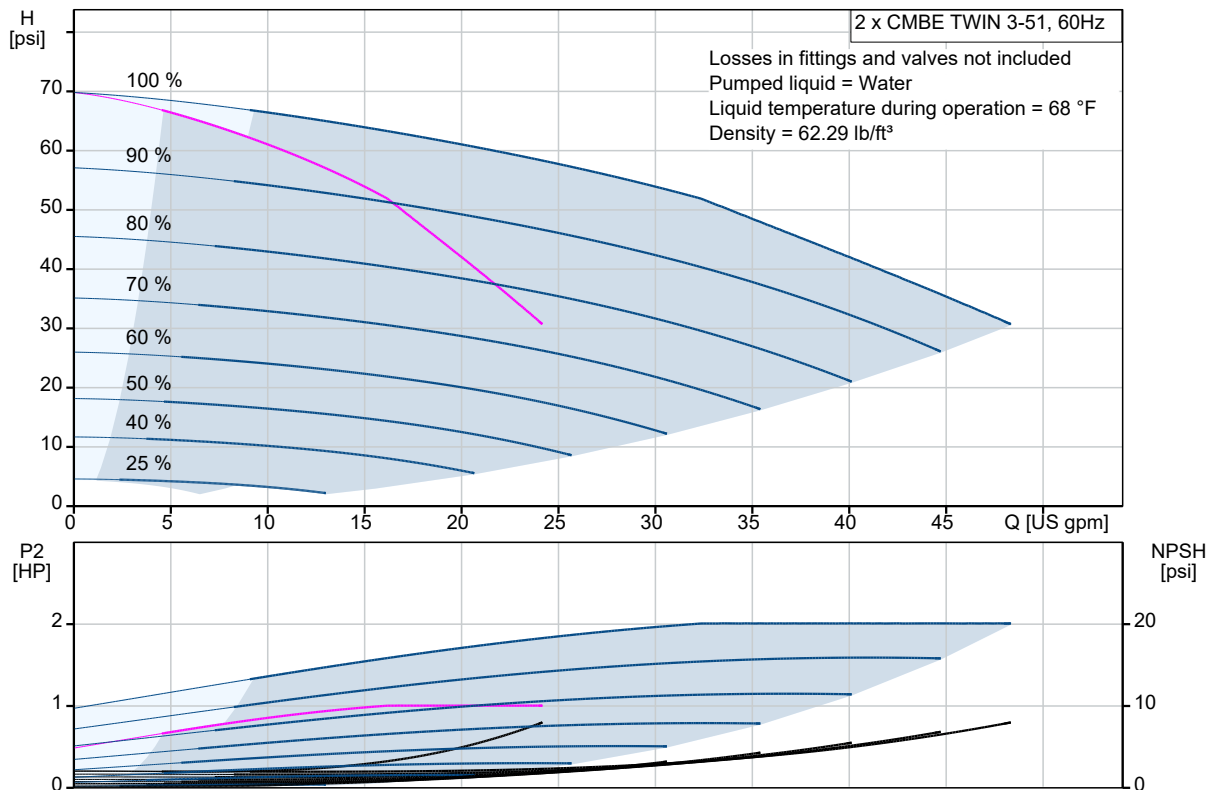

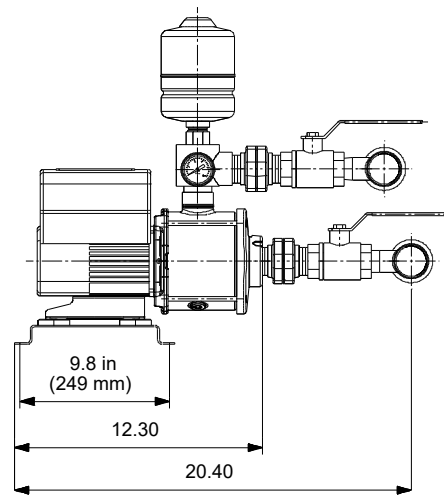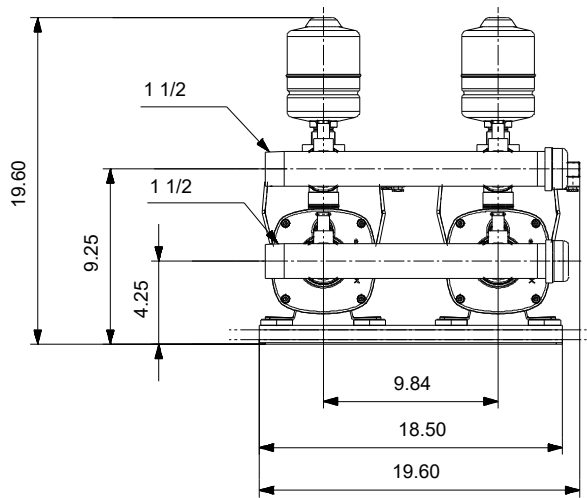

**Materials:**

Pump housing: Stainless steel  
 Pump housing: EN 1.4301  
 Pump housing: AISI 304  
 Impeller: Stainless steel  
 Impeller: DIN W.-Nr. 1.4301  
 Impeller: AISI 304  
 Rubber: EPDM

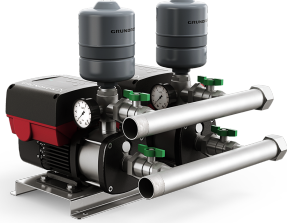Count	Description
1	<p><b>CMBE TWIN 3-51 I-X-C-B-D-G</b></p>  <p>Product photo could vary from the actual product</p> <p>Product No.: <a href="#">99503873</a></p> <p>The Grundfos CMBE TWIN Booster is a compact two-booster system for water supply in domestic and commercial applications.</p> <p>The integrated speed controller allows the CMBE Booster to maintain constant pressure in the pipe system.</p> <p>A pressure sensor monitoring changes in the water consumption will signal the speed controller to change the motor speed.</p> <p>This way performance is adjusted according to the new state, thus running in cascade multi pump.</p> <p>The cascade control ensures that the performance of the CMBE Booster is automatically adapted to consumption by switching pumps on or off and by changing the speed of the pumps in operation.</p> <p>The system thus runs as energy-efficiently as possible with a limited number of pumps.</p> <p>The CMBE-TWIN Booster is very easy to install.</p> <p>It has UL approval.</p> <p>The CME Booster consists of</p> <p>2 units of CMBE Booster which each include</p> <ul style="list-style-type: none"> <li>5-way valve</li> <li>expansion tank</li> <li>pressure gauge</li> <li>Pressure sensor</li> </ul> <p>Features</p> <ul style="list-style-type: none"> <li>Cascade multi pump operation</li> <li>Automatic pump alternation</li> <li>Constant pressure control</li> <li>Pipe filling</li> <li>Compact design</li> <li>Robust, stainless steel</li> <li>Easy installation (Plug &amp; Pump)</li> <li>Dry run protection</li> </ul> <p>Applications</p> <ul style="list-style-type: none"> <li>Apartment buildings</li> <li>Schools</li> <li>Small hotels</li> <li>Office buildings</li> <li>Agriculture</li> </ul>



Company name:

Created by:

Phone:

Date:

3/4/2021

Count	Description
	<p>Thermal protection CME Booster pumps require no external motor protection. The MGE motor incorporates thermal protection against slow overloading and blocking (IEC 34.11: TP211).</p> <p>NB:</p> <p>Suction lift: Max. 1 m, including suction-pipe pressure loss at a liquid temperature of +20 °C. (not self-priming)</p> <p>Liquid:</p> <p>Pumped liquid: Water</p> <p>Liquid temperature range: 32 .. 140 °F</p> <p>Selected liquid temperature: 68 °F</p> <p>Density: 62.29 lb/ft<sup>3</sup></p> <p>Technical:</p> <p>Pump speed on which pump data is based: 3780 rpm</p> <p>Primary shaft seal: AQQE</p> <p>Approvals and markings: CULUS</p> <p>Curve tolerance: ISO9906:2012 3B</p> <p>Start pressure: Integrated Frequency converter</p> <p>Main pump type: CMBE 3-51</p> <p>Main pump product number: 99503803</p> <p>Materials:</p> <p>Pump housing: Stainless steel EN 1.4301 AISI 304</p> <p>Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304</p> <p>Rubber: EPDM</p> <p>Installation:</p> <p>Maximum ambient temperature: 104 °F</p> <p>Flange standard: INTERNAL NPT THREAD</p> <p>Pump inlet: NPT1 1/2</p> <p>Pump outlet: NPT 1 1/2</p> <p>Electrical data:</p> <p>Rated power - P2: 1 HP</p> <p>Main frequency: 60 Hz</p> <p>Rated voltage: 1 x 115 V</p> <p>Insulation class (IEC 85): F</p> <p>Type of cable plug: FUSE</p> <p>Mains cable: 4.92 ft</p> <p>Tank:</p> <p>Tank volume: 4 l</p> <p>Others:</p>



Company name:

Created by:

Phone:

Date:

3/4/2021

Count	Description
	Net weight: 123 lb
	Gross weight: 231 lb
	Country of origin: US
	Custom tariff no.: 8413.70.2040



Company name:


Created by:

Phone:




Date:

3/4/2021

## 99503873 CMBE TWIN 3-51 I-X-C-B-D-G 60 Hz

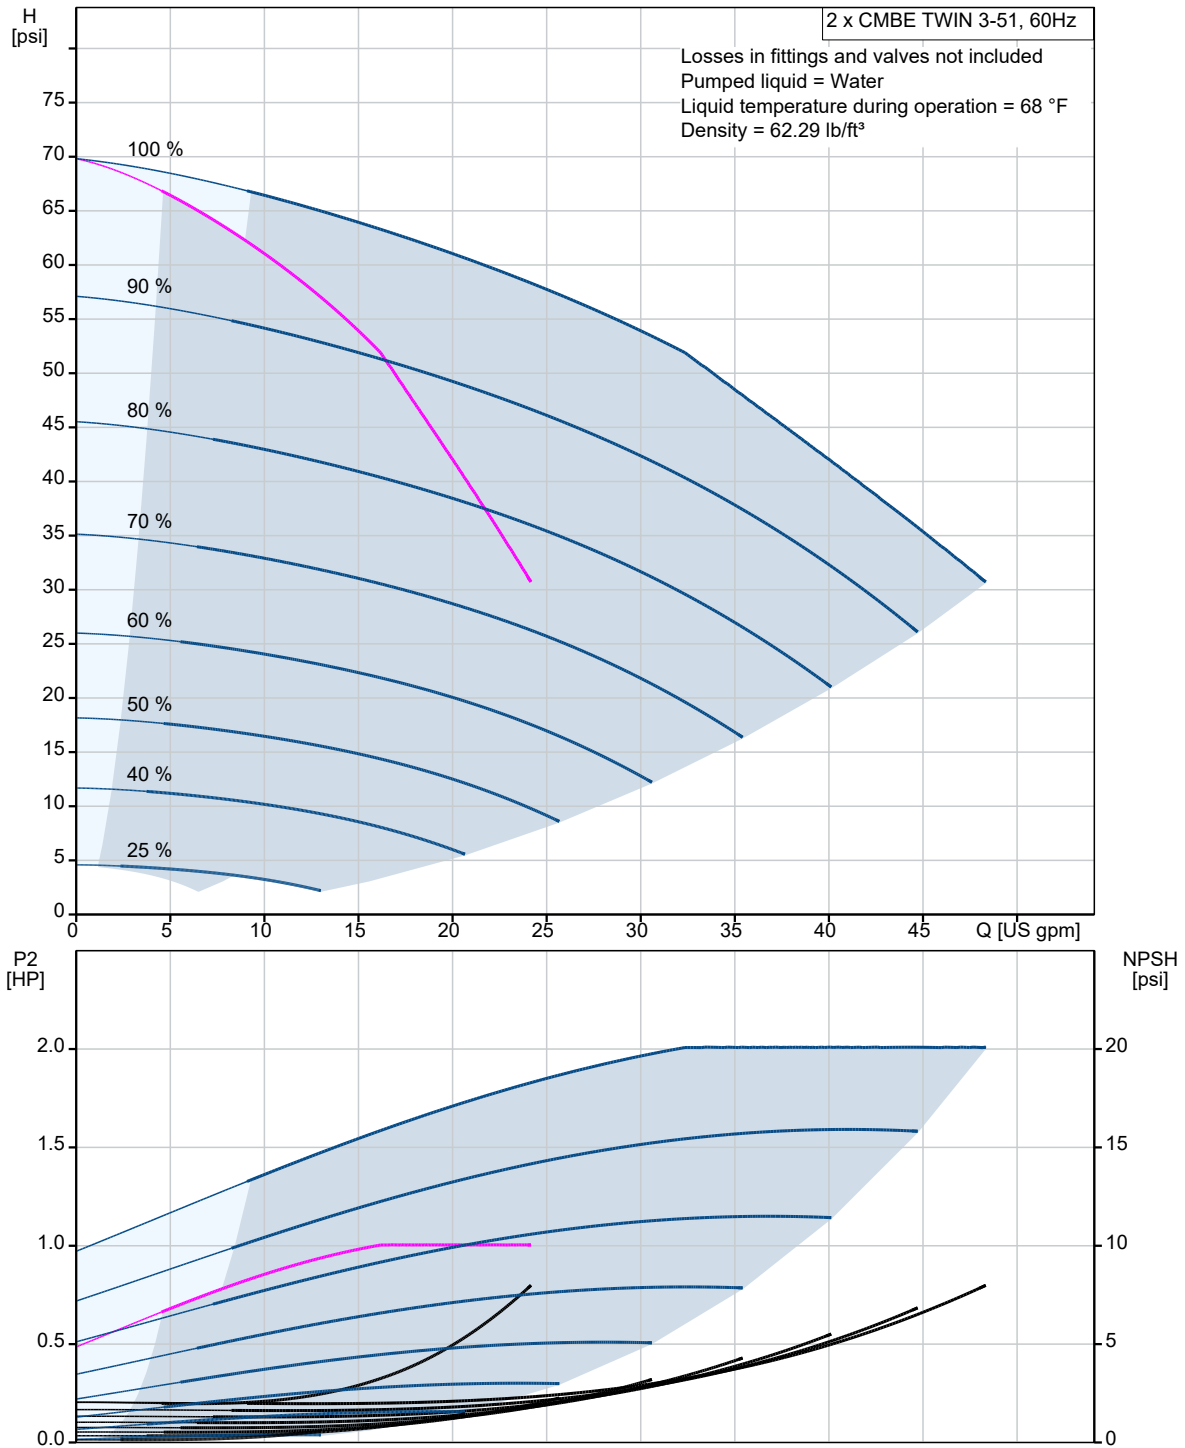

Description	Value
<b>General information:</b>	
Product name:	CMBE TWIN 3-51 I-X-C-B-D-G
Product No.:	99503873
EAN:	5713830163719
Price:	\$ 9030
<b>Technical:</b>	
Pump speed on which pump data is based:	3780 rpm
Impellers:	3
Primary shaft seal:	AQQE
Approvals and markings:	CULUS
Curve tolerance:	ISO9906:2012 3B
Number of pumps:	2
Model:	A
Start pressure:	Integrated Frequency converter
Main pump type:	CMBE 3-51
Main pump product number:	99503803
<b>Materials:</b>	
Pump housing:	Stainless steel
Pump housing:	EN 1.4301
Pump housing:	AISI 304
Impeller:	Stainless steel
Impeller:	DIN W.-Nr. 1.4301
Impeller:	AISI 304
Rubber:	EPDM
<b>Installation:</b>	
Maximum ambient temperature:	104 °F
Flange standard:	INTERNAL NPT THREAD
Pump inlet:	NPT1 1/2
Pump outlet:	NPT 1 1/2
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Selected liquid temperature:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Rated power - P2:	1 HP
Main frequency:	60 Hz
Rated voltage:	1 x 115 V
p max system:	145.04 psi
Insulation class (IEC 85):	F
Type of cable plug:	FUSE
Mains cable:	4.92 ft
<b>Tank:</b>	
Tank volume:	4 l
<b>Others:</b>	

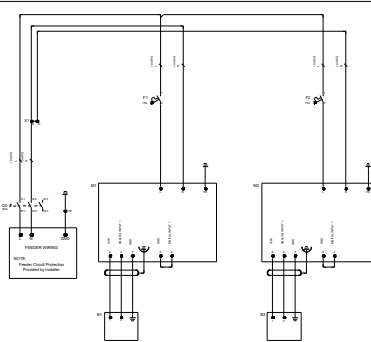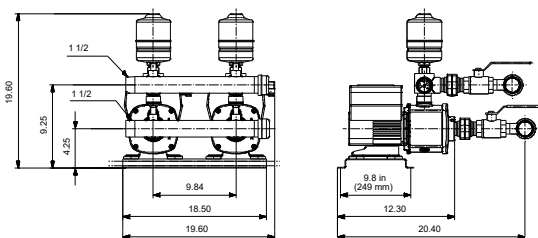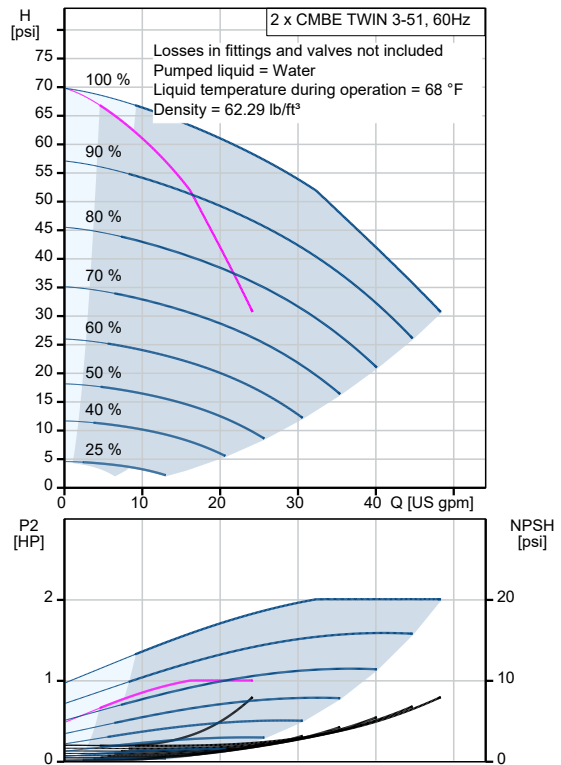



Company name:

Created by:

Phone:

Date:

3/4/2021

Description	Value
Net weight:	123 lb
Gross weight:	231 lb
Sales region:	Namreg
Config. file no:	99442909
Country of origin:	US
Custom tariff no.:	8413.70.2040







Company name:  
Created by:  
Phone:


Date: 3/4/2021

## 99503873 CMBE TWIN 3-51 I-X-C-B-D-G 60 Hz

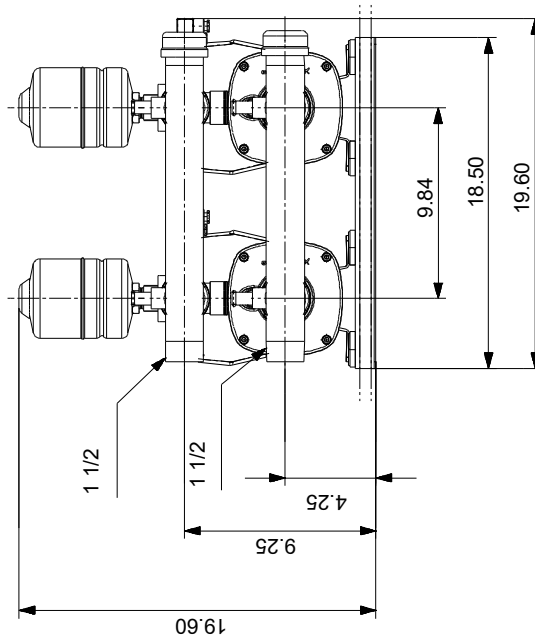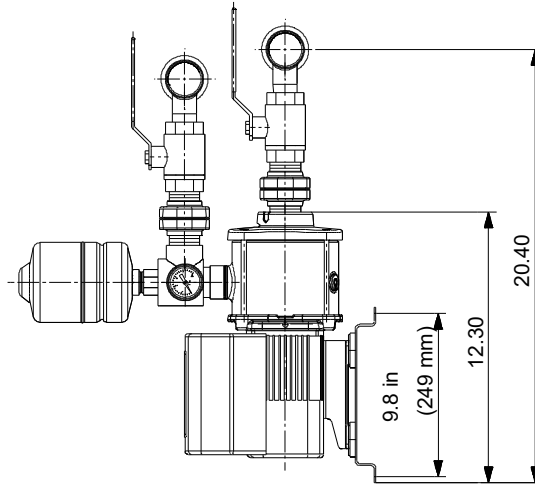

Note! All units are in [in] unless otherwise stated.  
Disclaimer: This simplified dimensional drawing does not show all details.

## 99503873 CMBE TWIN 3-51 I-X-C-B-D-G 60 Hz

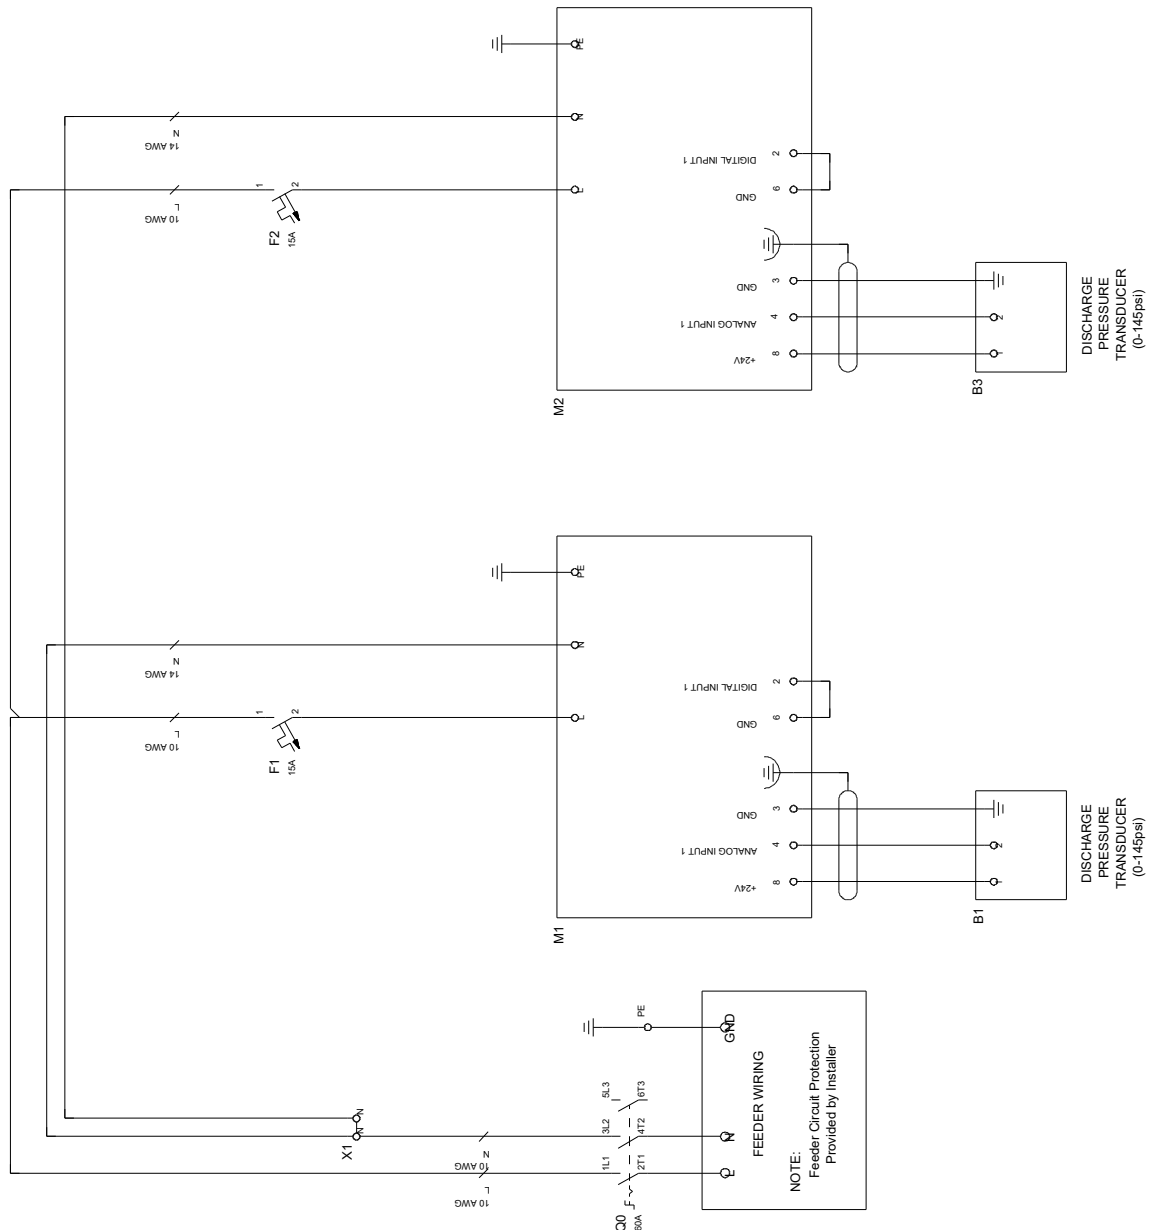

All units are [in] unless otherwise presented.