

Customer	Date	29.06.2021
Contact	Project	
Phone number	Project no.	
Email		

HVL3D3-5SV9GF4F60-G

Operating data

Pumpe type	Single-/Multi-pump set	Fluid	Water
No. of pumps / Standby pump	3 / 0	Operating temperature t A	°F 39.2
Nominal flow	US g.p.m. 0		
Nominal head	ft 0		
Static head	ft 0		
Inlet pressure	psi 0		
Environmental temperature	°F 68		
Available system NPSH	ft 0		

Pump data

Make	Goulds	Nominal	US g.p.m.	()
Speed	rpm 3500	Flow	Max-	US g.p.m. 44.2
No. of stages	1		Min-	US g.p.m.
Max. casing pressure	psi		Nominal	ft
Max. working pressure	psi 134.4	Head	at Qmax	ft 152.3
Head H(Q=0)	ft 310		at Qmin	ft 309.9
Weight	lb 615	Shaft power	hp	()
Communication Protocol	None Selected	Max. shaft power	hp	9
		Efficiency	%	
		NPSH 3%	ft	

Pump Materials

1 - Pump Body	Stainless Steel (AISI 304)
2 - Impeller	Stainless Steel (AISI 304)
3 - Diffuser	Stainless Steel (AISI 304)
4 - Casing	Stainless Steel (AISI 316L)
5 - Shaft	Stainless Steel (AISI 316)
6 - Adapter	Cast Iron (ASTM Class 35/40B)
7 - Base	Aluminum (A384.0-F)
8 - Coupling	Aluminum (A384.0-F)
9 - Seal Plate	Stainless Steel (AISI 316L)
10 - Coupling Guard	Stainless Steel (AISI 304)
11 - Shaft Sleeve and Bushing	Tungsten carbide
12 - Fill/Drain Plugs	Stainless Steel (AISI 316)
13 - Tie Rods	Carbon Steel / Zinc Plated (A29 Gr. 1045)
14 - Wear Ring	PPS
15 - Seal Gland	Stainless Steel (AISI 316)

Shaft Seal

1 - Rotating Face	Carbon
2 - Stationary Face	Silicon Carbide Graphite Filled
3 - Elastomers	Viton
4 - Spring	316SS
5 - Metal Components	316SS

Motor data

Specific design	3ph TEPE (eHV)		
Type	V09A32F5BD2S	Electric voltage	460 V
Rated power	3 hp	Electric current	0 A
Speed	3500 rpm	Degree of protection	IP 55
Frame size	56C	Insulation class	B



Customer	Date	29.06.2021
Contact	Project	
Phone number	Project no.	
Email		

HVL3D3-5SV9GF4F60-G


Hydraulic Data

Operating Data Specification		Hydraulic data (duty point)		Impeller design	
Flow	0 US g.p.m.	Flow		Impeller R	0 inch
Head	0 ft	Head		Frequency	60 Hz
Static head	0 ft			Speed	3500 rpm

Power data referred to:

Water [100%] ; 39.2°F; 62.4lb/ft³; 1.69E-5ft²/s

Performance according to ANSI/HI 14.6 - Grade 2B

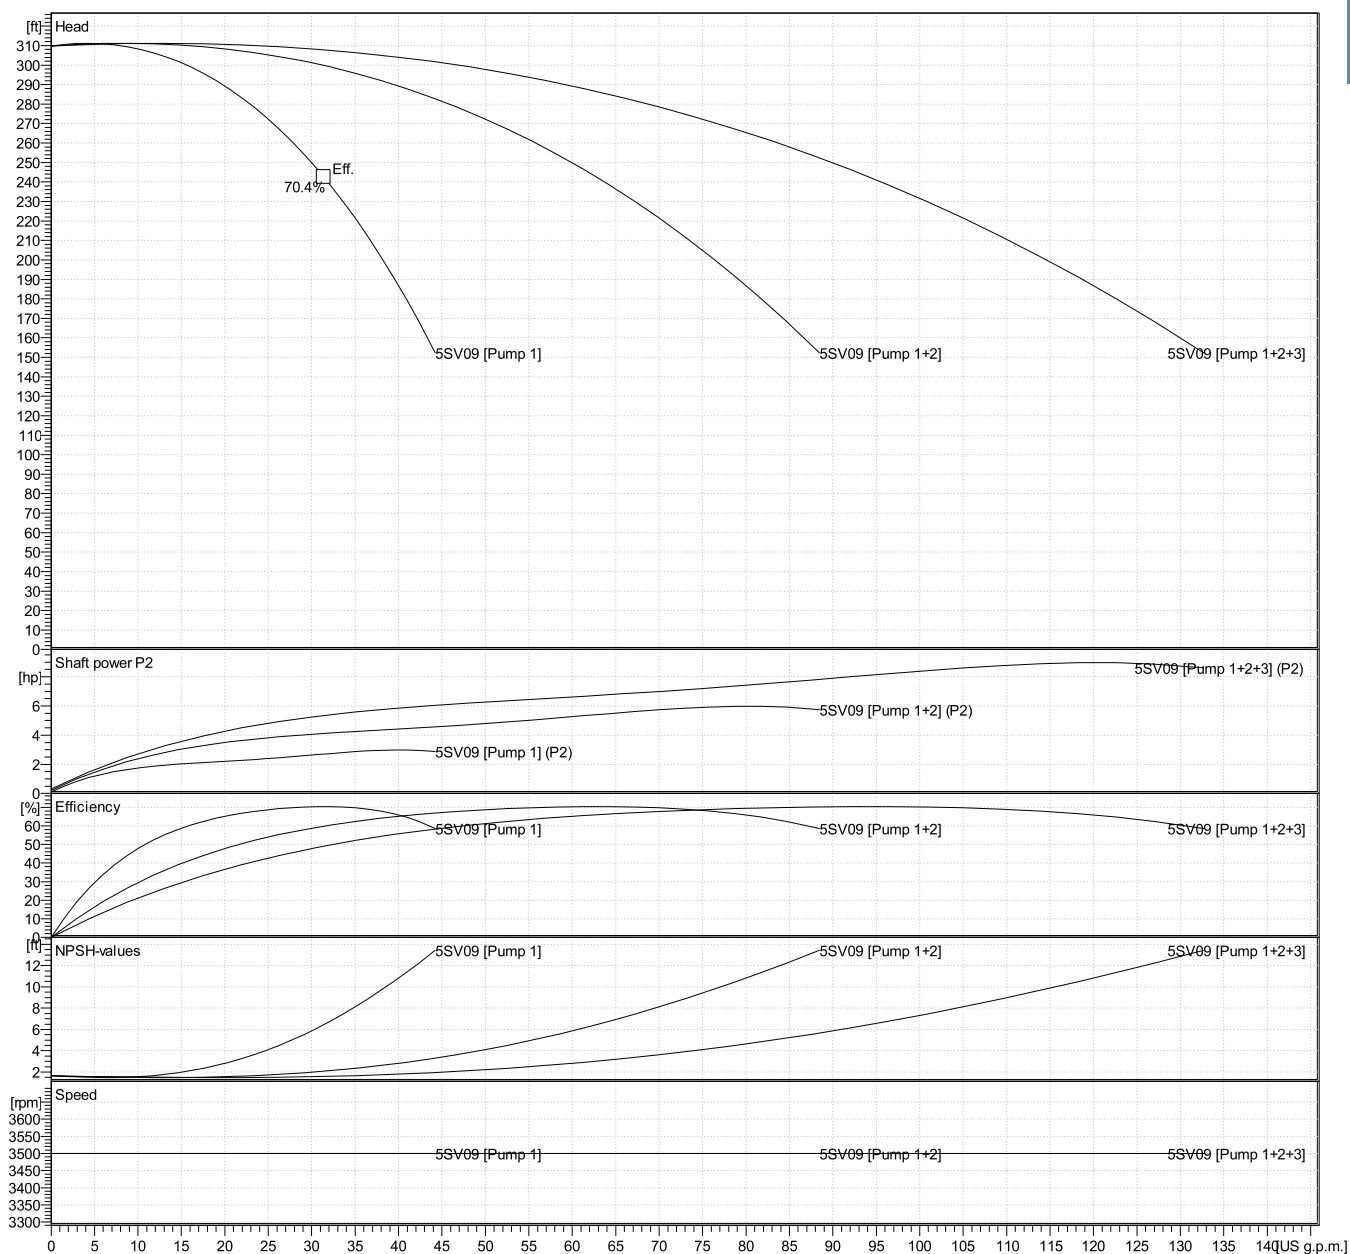






Customer	Date	29.06.2021
Contact	Project	
Phone number	Project no.	
Email		

HVL3D3-5SV9GF4F60-G

Drawing

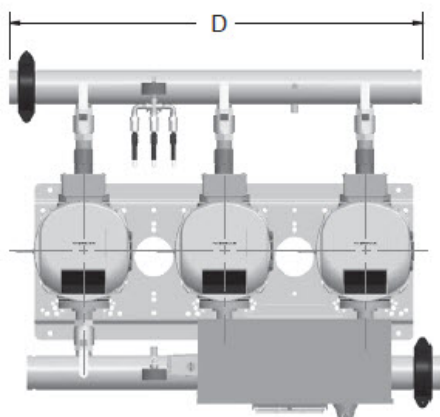

TechnoForce e-HV Dimentions 5SV

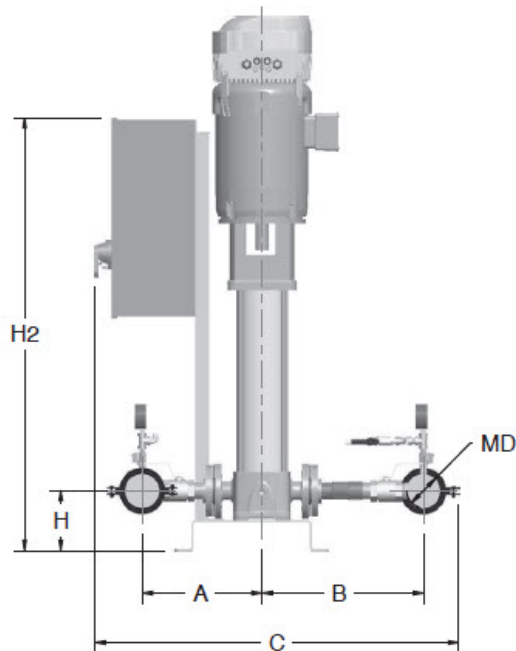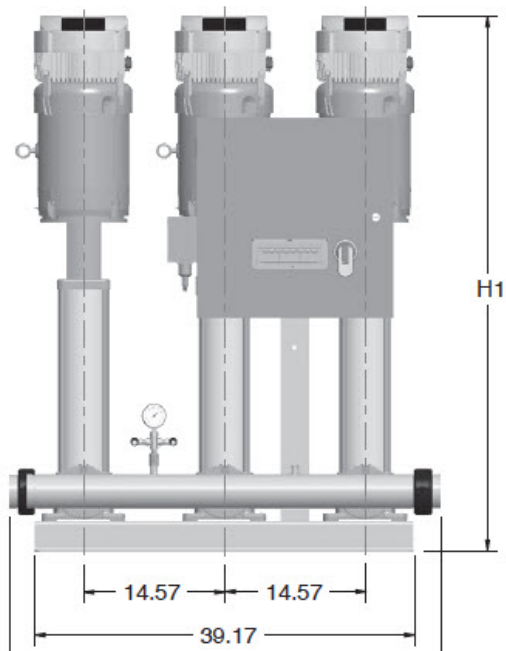

Di

inch

A
B
C
D
H
H1
H2
L
MD

$12\frac{3}{8}$
 $16\frac{5}{8}$
 $36\frac{1}{4}$
 $42\frac{11}{16}$
 $6\frac{1}{8}$
 $42\frac{1}{4}$
 $33\frac{5}{16}$
 $44\frac{7}{16}$
3

Weight
614.99 lb