

Customer	Date 01.07.2021
Contact	Project
Phone number	Project no.
Email	

HVL4D6-15SV1GE4F60-G

Operating data

Pumpe type	Single-/Multi-pump set	Fluid	Water
No. of pumps / Standby pump	4 / 0	Operating temperature t A	°F 39.2
Nominal flow	US g.p.m. 0		
Nominal head	ft 0		
Static head	ft 0		
Inlet pressure	psi 0		
Environmental temperature	°F 68		
Available system NPSH	ft 0		

Pump data

Make	Goulds	Flow	Nominal	US g.p.m.	()
Speed	rpm 3500		Max-	US g.p.m.	129.2
No. of stages	1		Min-	US g.p.m.	
Max. casing pressure	psi		Nominal	ft	
Max. working pressure	psi 27.5	Head	at Qmax	ft 22	
Head H(Q=0)	ft 63		at Qmin	ft 63.5	
Weight	lb 1215	Shaft power		hp	()
Communication Protocol	None Selected	Max. shaft power		hp 8	
		Efficiency		%	
		NPSH 3%		ft	

Pump Materials

1 - Pump Body	Stainless Steel (AISI 304)
2 - Impeller	Stainless Steel (AISI 304)
3 - Diffuser	Stainless Steel (AISI 304)
4 - Casing	Stainless Steel (AISI 316L)
5 - Shaft	Stainless Steel (AISI 316)
6 - Adapter	Cast Iron (ASTM Class 35/40B)
7 - Base	Aluminum (A384.0-F)
8 - Coupling	Aluminum (A384.0-F)
9 - Seal Plate	Stainless Steel (AISI 316L)
10 - Coupling Guard	Stainless Steel (AISI 304)
11 - Shaft Sleeve and Bushing	Tungsten carbide
12 - Fill/Drain Plugs	Stainless Steel (AISI 316)
13 - Tie Rods	Carbon Steel / Zinc Plated (A29 Gr. 1045)
14 - Wear Ring	PPS
15 - Seal Gland	Stainless Steel (AISI 316)

Shaft Seal

1 - Rotating Face	Carbon
2 - Stationary Face	Silicon Carbide Graphite Filled
3 - Elastomers	Viton
4 - Spring	316SS
5 - Metal Components	316SS

Motor data

Specific design	3ph TEPE (eHV)		
Type	V08A32E5BB2S	Electric voltage	460 V
Rated power	2 hp	Electric current	0 A
Speed	3500 rpm	Degree of protection	IP 55
Frame size	56C	Insulation class	B



Customer	Date	01.07.2021
Contact	Project	
Phone number	Project no.	
Email		

HVL4D6-15SV1GE4F60-G


Hydraulic Data

Operating Data Specification		Hydraulic data (duty point)		Impeller design	
Flow	0 US g.p.m.	Flow		Impeller R	0 inch
Head	0 ft	Head		Frequency	60 Hz
Static head	0 ft			Speed	3500 rpm

Power data referred to:

Water [100%] ; 39.2°F; 62.4lb/ft³; 1.69E-5ft²/s

Performance according to ANSI/HI 14.6 - Grade 2B

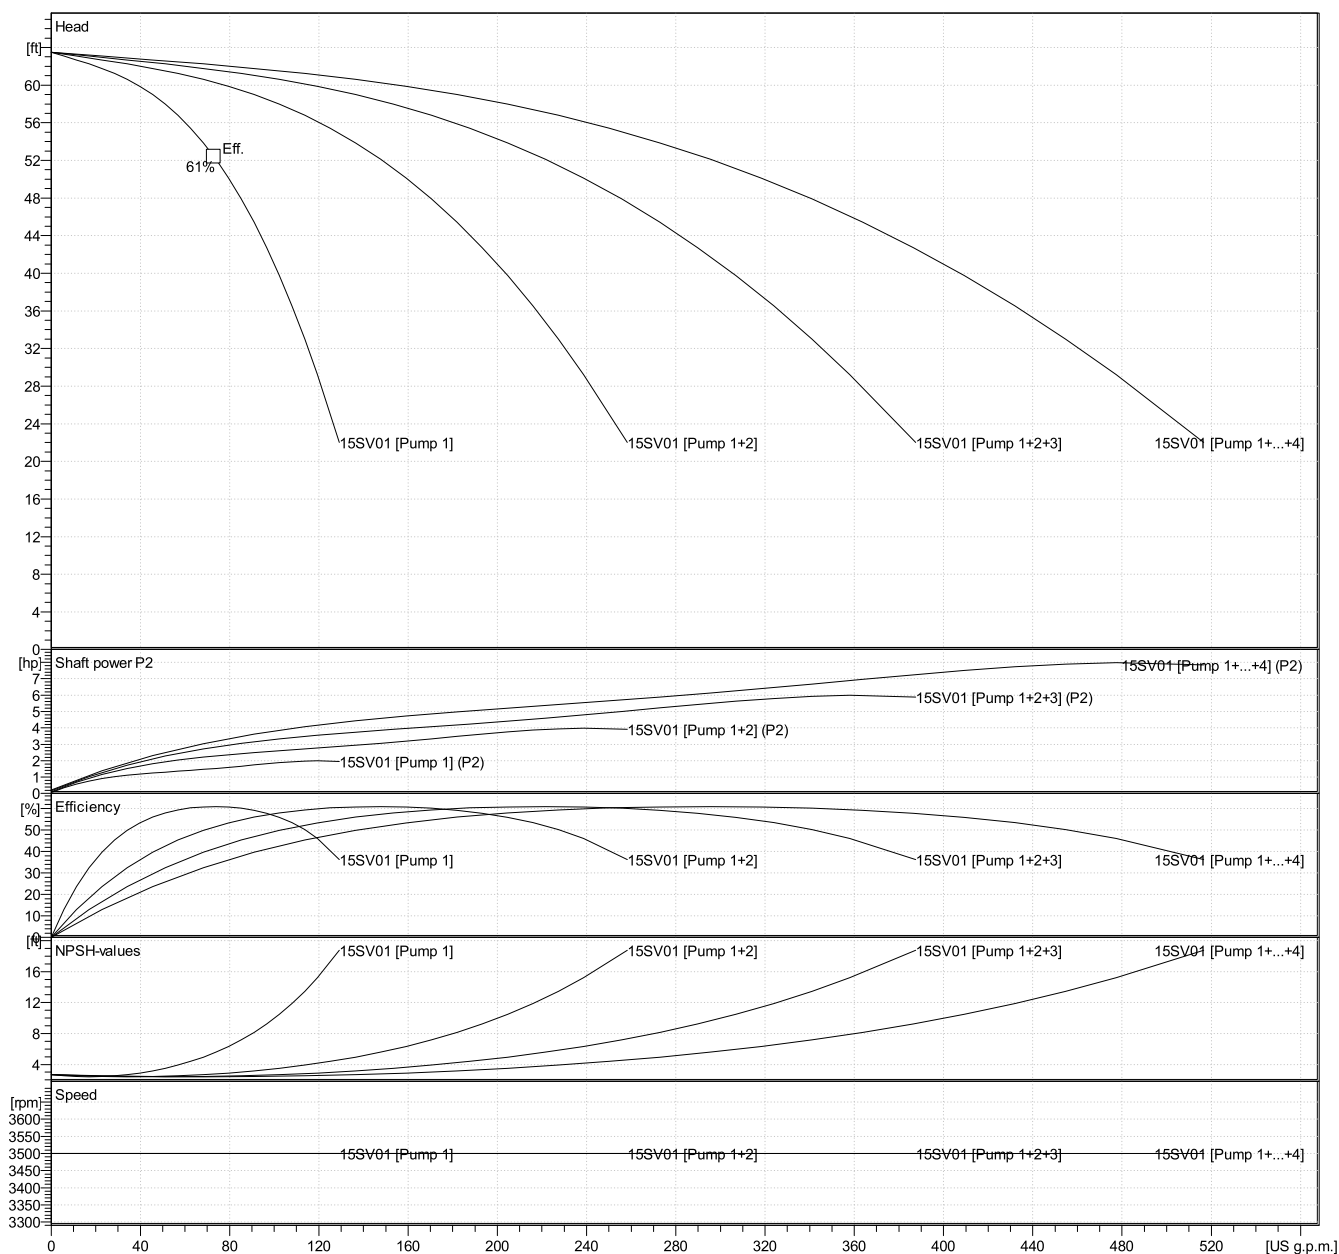






Customer	Date	01.07.2021
Contact	Project	
Phone number	Project no.	
Email		

HVL4D6-15SV1GE4F60-G

Drawing

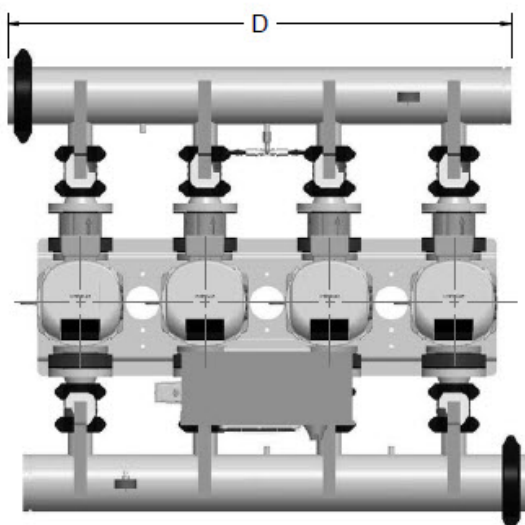

TechnoForce e-HV Dimensions 15SV

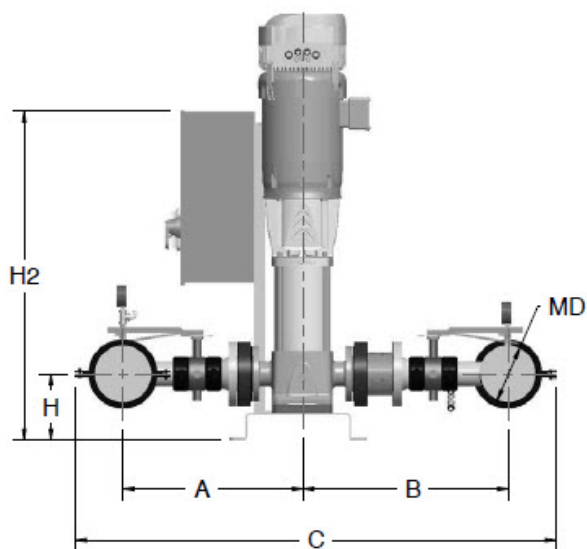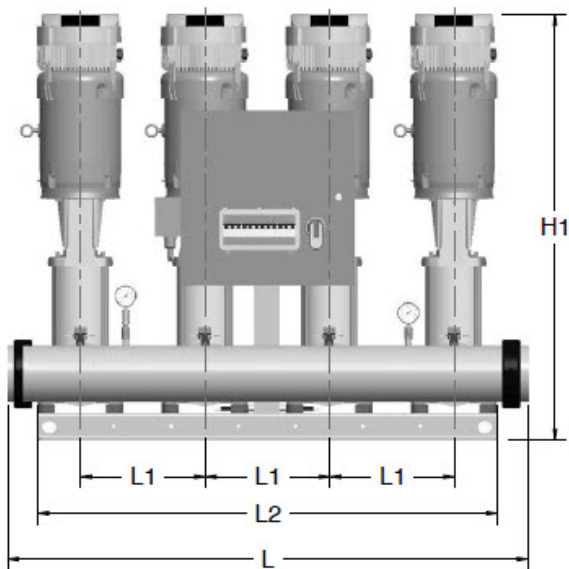

inch

A	21 ¹ / ₃₂	L2	53 ³ / ₄			Weight
B	24 ¹ / ₃₂	MD	6			1215 lb
C	56 ³ / ₁₆					
D	58 ¹⁵ / ₁₆					
H	7 ¹¹ / ₁₆					
H1	40 ¹³ / ₁₆					
H2	38 ⁵ / ₁₆					
L	64 ³ / ₄					
L1	14 ⁹ / ₁₆					