

| | | |
|-----------------------|------------------------|-----------------|
| PROJECT: _____ | UNIT TAG: _____ | QUANTITY: _____ |
| REPRESENTATIVE: _____ | TYPE OF SERVICE: _____ | DATE: _____ |
| ENGINEER: _____ | SUBMITTED BY: _____ | DATE: _____ |
| CONTRACTOR: _____ | APPROVED BY: _____ | DATE: _____ |
| | ORDER NO.: _____ | DATE: _____ |





Product photo could vary from the actual product

CR 20-2 A-B-A-E-HQQE

Vertical, multistage centrifugal pump with suction and discharge ports on the same level. The pump head and base are in cast iron. All other wetted parts are in stainless steel (EN 1.4301)(AISI 304)


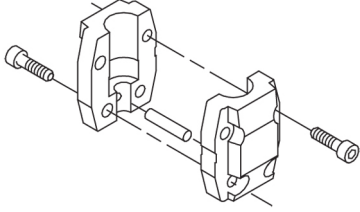
| Conditions of Service | Pump Data | Motor Data |
|-------------------------|--|--------------------------|
| Efficiency: _____ | Max pressure at stated temperature: 145 psi / 250 °F | Rated power - P2: 5 HP |
| Liquid: Water | Liquid temperature range: -4 .. 248 °F | Rated voltage: 208-230 V |
| Temperature: 68 °F | Maximum ambient temperature: 104 °F | Main frequency: 60 Hz |
| NPSH required: ft | Shaft seal: HQQE | Enclosure class: IP55 |
| Specific Gravity: 1.000 | Product number: 99917689 | Insulation class: F |
| | | Motor protection: PTO |
| | | Motor type: WEG |
| | | Eff. 1/1: 84.0 % |

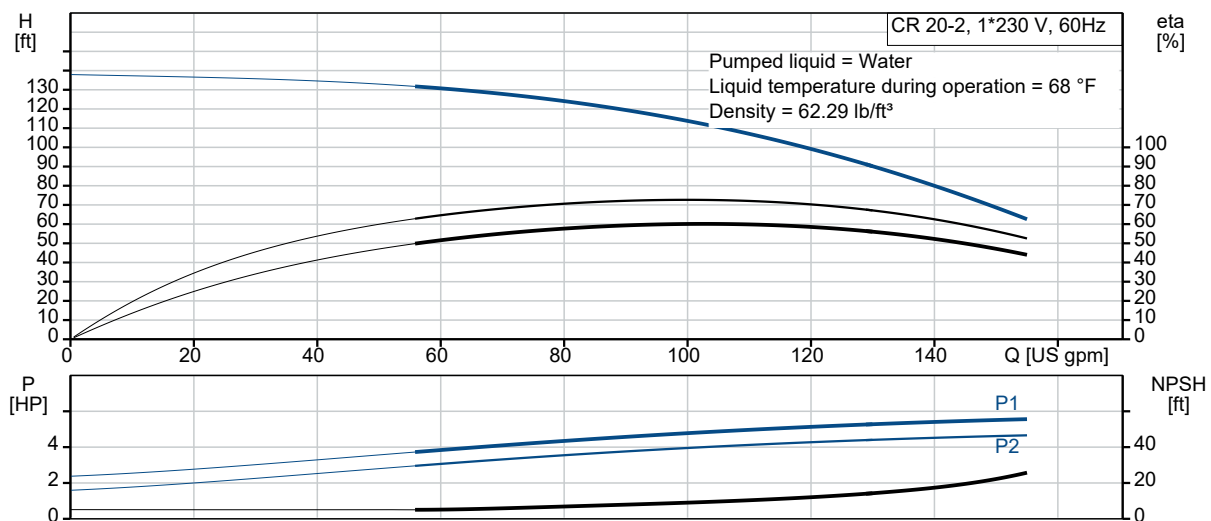

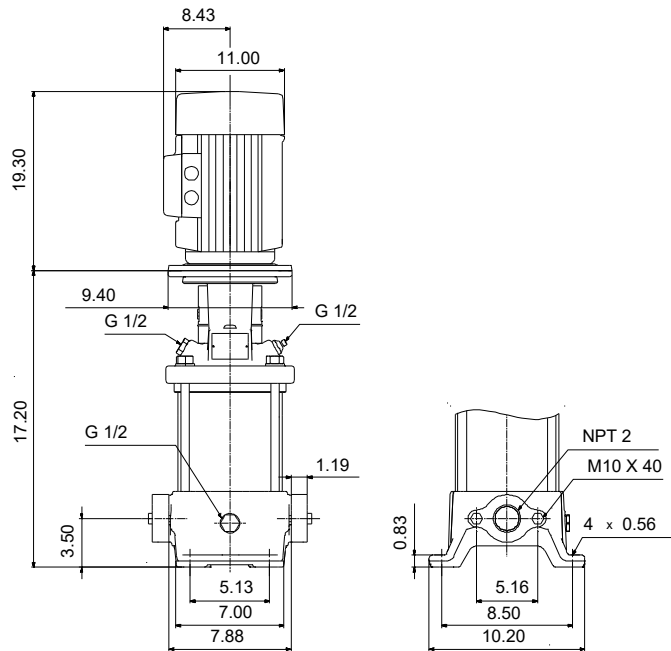

Materials:

| | |
|------------------|--------------------|
| Base: | Cast iron |
| Base: | EN 1561 EN-GJL-200 |
| Base: | ASTM A48-25B |
| Impeller: | Stainless steel |
| Impeller: | AISI 304 |
| Impeller: | EN 1.4301 |
| Material code: | A |
| Code for rubber: | E |

| Count | Description |
|-------|--|
| 1 | <p>CR 20-2 A-B-A-E-HQQE</p>  <p>Product No.: 99917689</p> <p>Vertical, multistage centrifugal pump with inlet and outlet ports on same the level (inline). The pump head and base are in cast iron – all other wetted parts are in stainless steel. A cartridge shaft seal ensures high reliability, safe handling, and easy access and service. Power transmission is via a rigid split coupling. Pipe connection is via oval flanges with internal NPT threads.</p> <p>The pump is fitted with a 1-phase, fan-cooled asynchronous motor.</p> <p>Further product details</p> <p>Steel, cast iron and aluminium components have an epoxy-based coating made in a cathodic electro-deposition (CED) process.</p> <p>CED is a high-quality dip-painting process where an electrical field around the products ensures deposition of paint particles as a thin, well-controlled layer on the surface.</p> <p>An integral part of the process is a pretreatment.</p> <p>The entire process consists of these elements:</p> <ol style="list-style-type: none"> 1) Alkaline-based cleaning. 2) Zinc phosphating. 3) Cathodic electro-deposition. 4) Curing to a dry film thickness 18-22 my m. <p>The colour code for the finished product is NCS 9000/RAL 9005.</p> <p>Pump</p> <p>A standard split coupling connects the pump and motor shaft. It is enclosed in the pump head/motor stool by means of two coupling guards.</p>  <p>The pump head, pump head cover and flange for motor mounting is made in one piece. The pump head has a combined 1/2" priming plug and vent screw.</p> |



The pump is fitted with a balanced O-ring seal unit with a rigid torque-transmission system.

This seal type is assembled in a cartridge unit which makes replacement safe and easy.

Due to the balancing, this seal type is suitable for high-pressure applications.

The cartridge construction also protects the pump shaft from possible wear from a dynamic O-ring between pump shaft and shaft seal.

Primary seal:

- Rotating seal ring material: silicon carbide (SiC)
- Stationary seat material: silicon carbide (SiC)

This material pairing is used where higher corrosion resistance is required. The high hardness of this material pairing offers good resistance against abrasive particles.

Secondary seal material: EPDM (ethylene-propylene rubber)


EPDM has excellent resistance to hot water. EPDM is not suitable for mineral oils.



The shaft seal is screwed into the pump head.

The chambers and impellers are made of stainless-steel sheet. The chambers are provided with a PTFE neck ring offering improved sealing and high efficiency. The impellers have smooth surfaces, and the shape of the blades ensure a high efficiency.

The base is made of cast iron. The oval flanges are bolted to the base. The outlet side of the base has a drain plug. The pump is secured to the foundation by four bolts through the base plate.

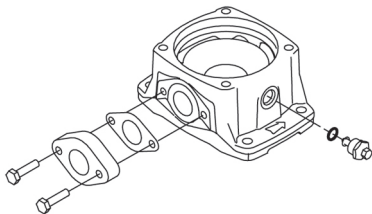

Motor

The motor is a totally enclosed, fan-cooled motor with principal dimensions to IEC and DIN standards. The motor is flange-mounted with tapped-hole flange (FT).

Motor-mounting designation in accordance with IEC 60034-7: IM B 14 (Code I) / IM 3601 (Code II).

Electrical tolerances comply with IEC 60034.



Company name:

Created by:

Phone:

Date:

11/1/2021

| Count | Description |
|-------|--|
| | <p>The motor has built-in thermal protection (PTO current and temperature sensors) in accordance with IEC 60034-11 and requires no further motor protection. The protection reacts to both slow- and quick-rising temperatures, e.g. constant overload and stalled conditions.</p> <p>As the thermal protection incorporates automatic reset, the motor must be connected in a way which ensures that the automatic reset cannot cause accidents.</p> <p>Technical data</p> <p>Liquid:</p> <p>Liquid temperature range: -4 .. 248 °F</p> <p>Selected liquid temperature: 68 °F</p> <p>Technical:</p> <p>Materials:</p> <p>Installation:</p> <p>t max amb: 104 °F</p> <p>Maximum operating pressure: 145.04 psi</p> <p>Max pressure at stated temperature: 145 psi / 250 °F 145 psi / -4 °F</p> <p>Electrical data:</p> <p>Power (P2) required by pump: 5 HP</p> <p>Starting current: 800-800 %</p> <p>Controls:</p> <p>Frequency converter: NONE</p> <p>Others:</p> <p>Country of origin: US</p> <p>Custom tariff no.: 8413.70.2040</p> |



Company name:


Created by:

Phone:




Date:

11/1/2021

99917689 CR 20-2 A-B-A-E-HQQE 60 Hz

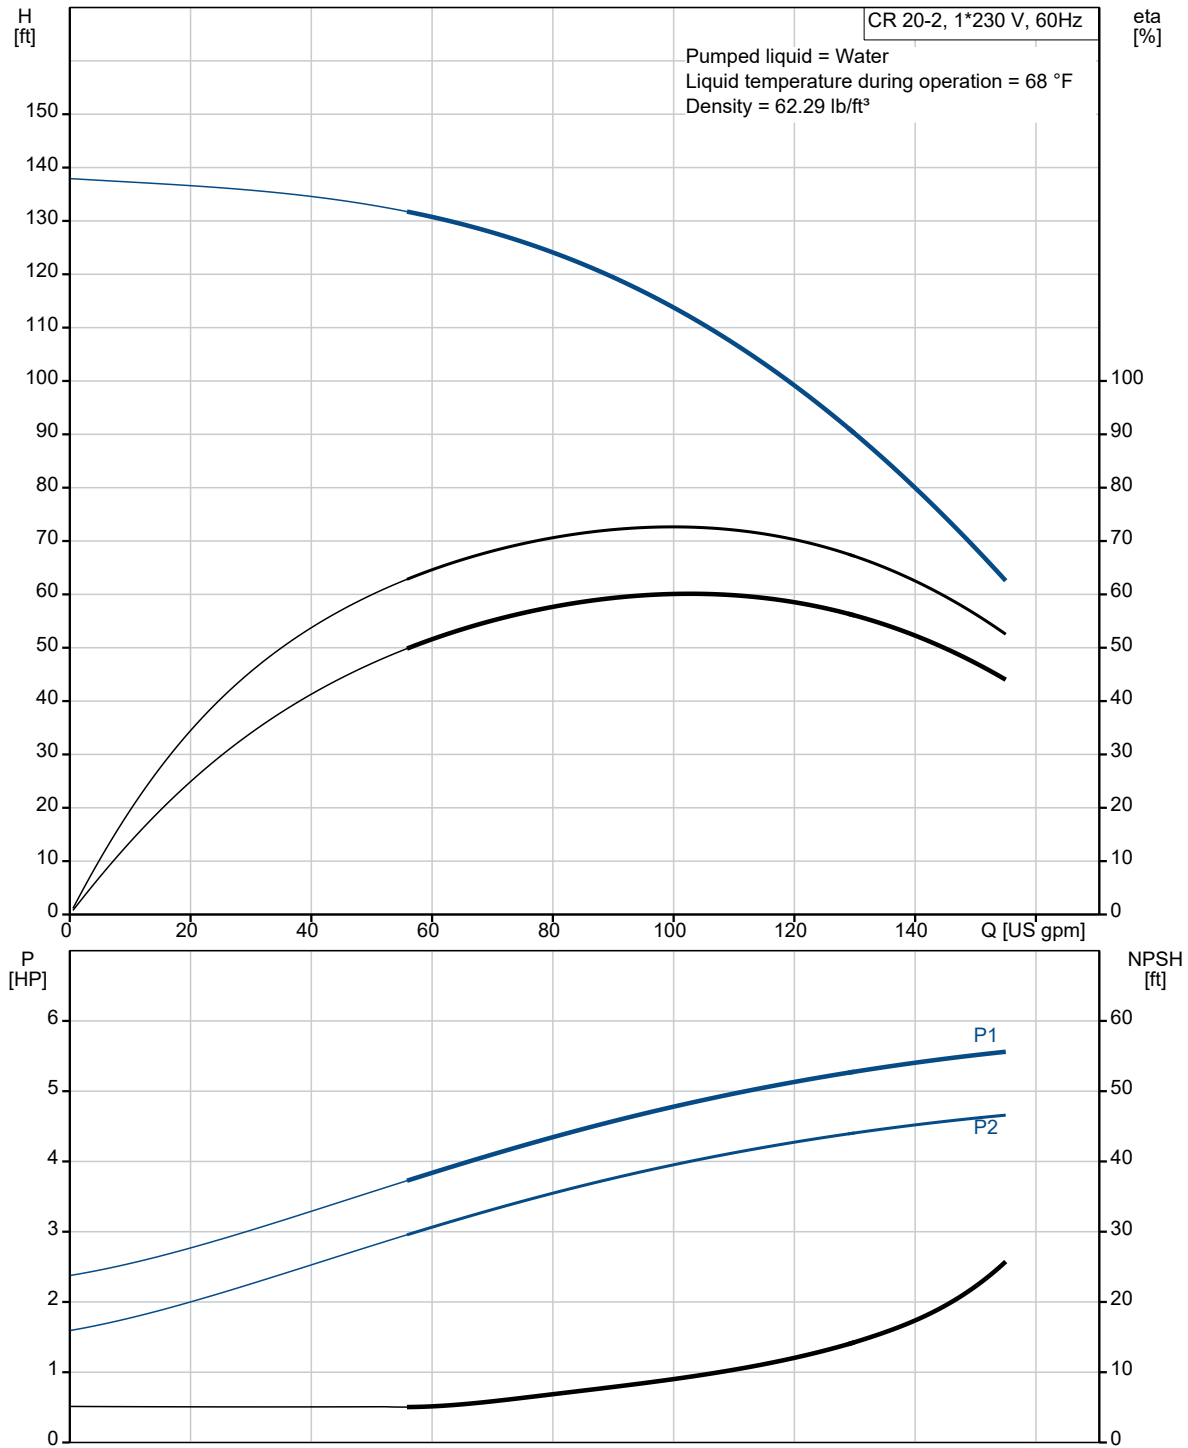

| Description | Value |
|---------------------------------------|-------------------------|
| General information: | |
| Product name: | CR 20-2 A-B-A-E-HQQE |
| Product No.: | 99917689 |
| EAN: | 5715114125413 |
| Technical: | |
| Rated pump speed: | 3468 rpm |
| Rated flow: | 111 US gpm |
| Rated head: | 104 ft |
| Maximum head: | 136.5 ft |
| Actual impeller diameter: | 4.13 in |
| Stages: | 2 |
| Impellers: | 2 |
| Number of reduced-diameter impellers: | 0 |
| Low NPSH: | N |
| Pump orientation: | Vertical |
| Shaft seal arrangement: | Single |
| Code for shaft seal: | HQQE |
| Approvals: | CURUS |
| Approvals for drinking water: | NSF/ANSI 61 |
| Curve tolerance: | ISO9906:2012 3B |
| Pump version: | A |
| Model: | A |
| Cooling: | IC 411 |
| Materials: | |
| Base: | Cast iron |
| Base: | EN 1561 EN-GJL-200 |
| Base: | ASTM A48-25B |
| Impeller: | Stainless steel |
| Impeller: | EN 1.4301 |
| Impeller: | AISI 304 |
| Material code: | A |
| Code for rubber: | E |
| Bearing: | SIC |
| Installation: | |
| t max amb: | 104 °F |
| Maximum operating pressure: | 145.04 psi |
| Max pressure at stated temperature: | 145 psi / 250 °F |
| Max pressure at stated temperature: | 145 psi / -4 °F |
| Type of connection: | Oval / NPT(F) |
| Size of suction port: | 2 inch |
| Size of outlet port: | 2 inch |
| Pressure rating for connection: | PN 10 |
| Flange size for motor: | 182TC |
| Connect code: | B |
| Liquid: | |
| Pumped liquid: | Water |
| Liquid temperature range: | -4 .. 248 °F |

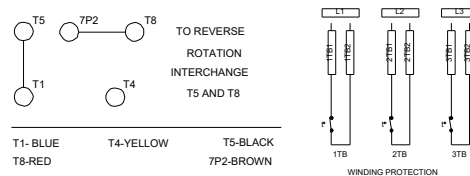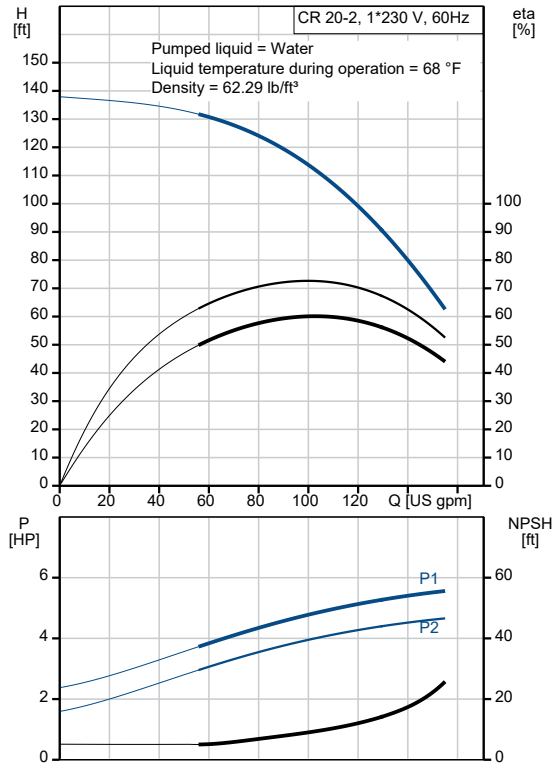



Company name:

Created by:


Phone:

Date:

11/1/2021

| Description | Value |
|--------------------------------|---------------|
| Selected liquid temperature: | 68 °F |
| Density: | 62.29 lb/ft³ |
| Electrical data: | |
| Motor standard: | NEMA |
| Motor type: | WEG |
| Rated power - P2: | 5 HP |
| Power (P2) required by pump: | 5 HP |
| Main frequency: | 60 Hz |
| Rated voltage: | 1 x 208-230 V |
| Service factor: | 1.15 |
| Rated current: | 31.7-25.3 A |
| Starting current: | 800-800 % |
| Full load SF current: | 31.7/22.4 A |
| Cos phi - power factor: | 0.98 |
| Rated speed: | 3515 rpm |
| IE efficiency: | 84.0% |
| Motor efficiency at full load: | 84.0 % |
| Motor efficiency at 3/4 load: | 82.0 % |
| Motor efficiency at 1/2 load: | 76.4 % |
| Number of poles: | 2 |
| Enclosure class (IEC 34-5): | IP55 |
| Insulation class (IEC 85): | F |
| Built-in motor protection: | PTO |
| Motor Number: | 99883304 |
| Controls: | |
| Frequency converter: | NONE |
| Others: | |
| DOE Pump Energy Index CL: | 0.91 |
| Net weight: | 218 lb |
| Gross weight: | 234 lb |
| Shipping volume: | 13.1 ft³ |
| Country of origin: | US |
| Custom tariff no.: | 8413.70.2040 |

99917689 CR 20-2 A-B-A-E-HQQE 60 Hz

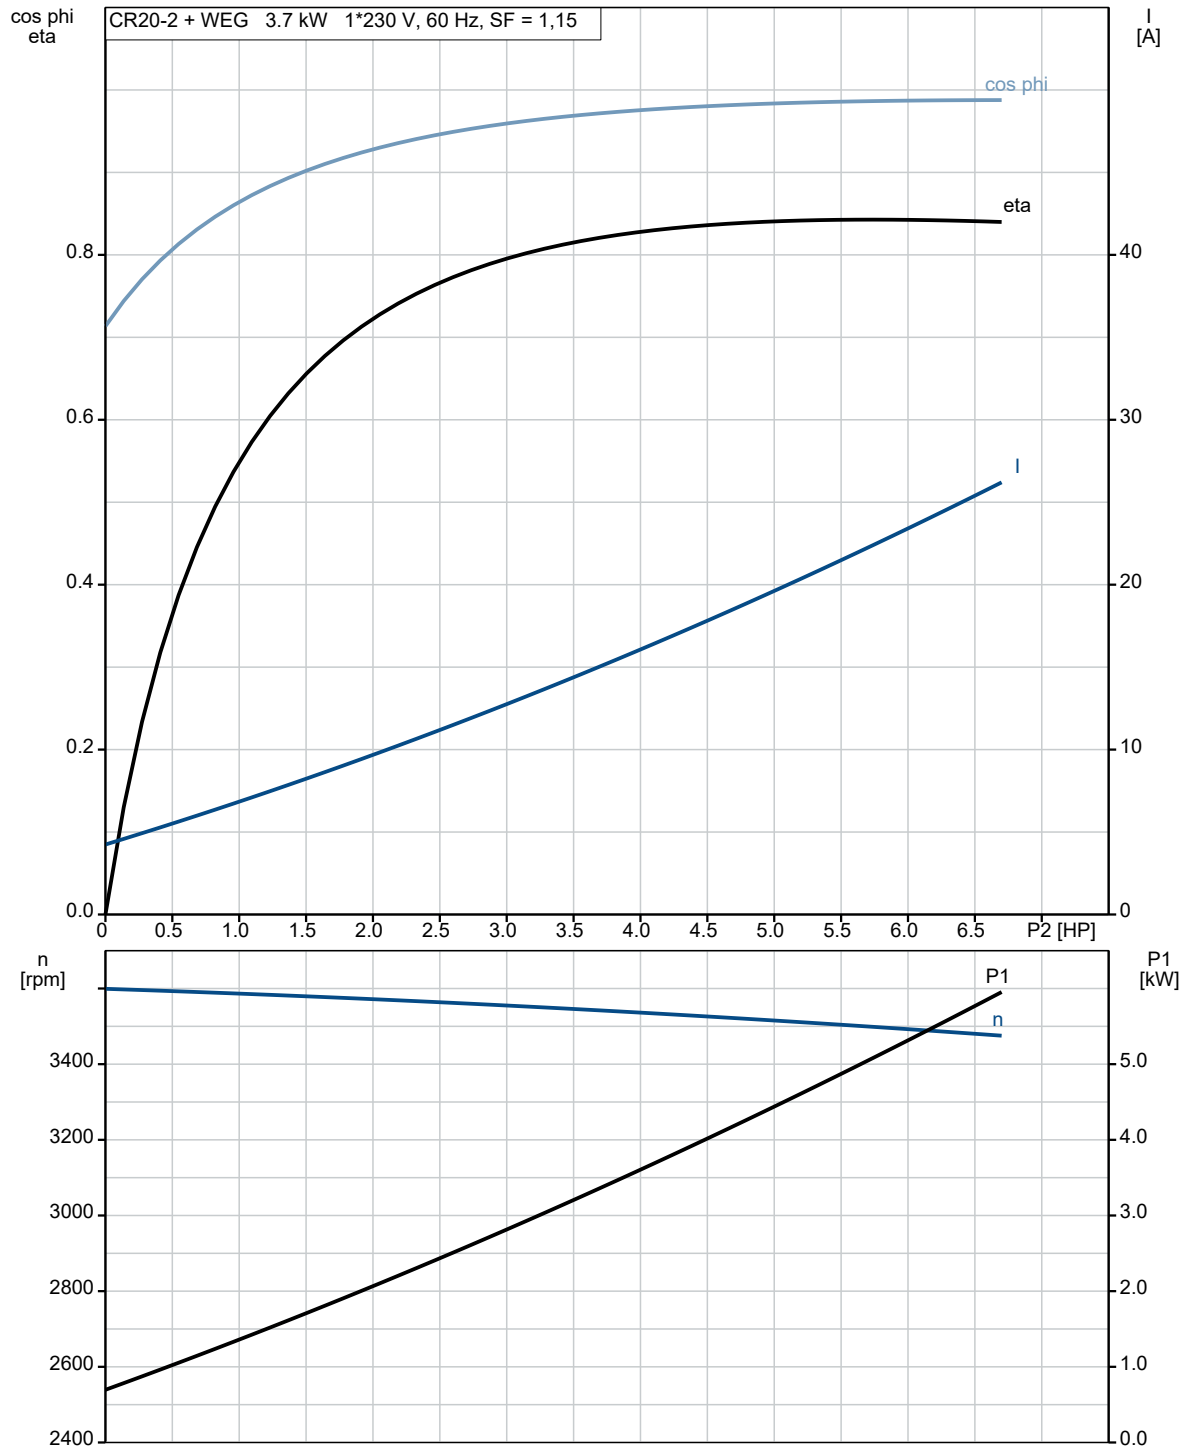



Company name:


Created by:

Phone:

Date:



11/1/2021

99917689 CR 20-2 A-B-A-E-HQQE 60 Hz

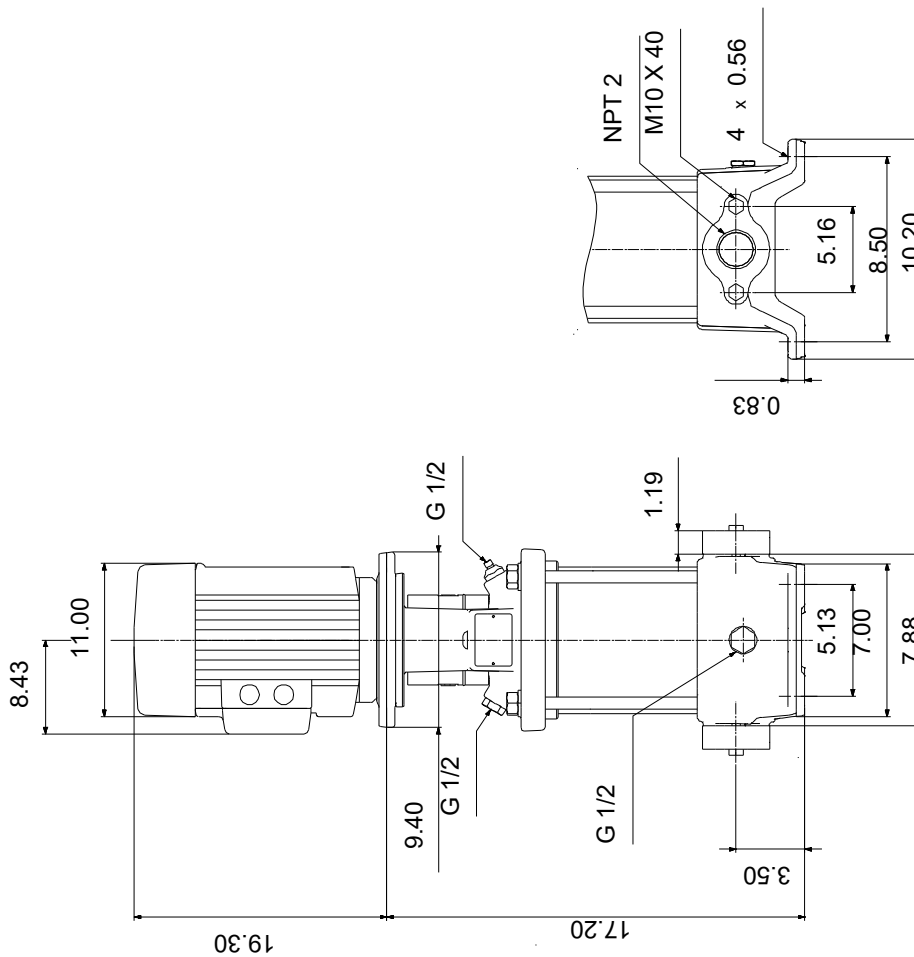

Note! All units are in [in] unless otherwise stated.
Disclaimer: This simplified dimensional drawing does not show all details.

99917689 CR 20-2 A-B-A-E-HQQE 60 Hz

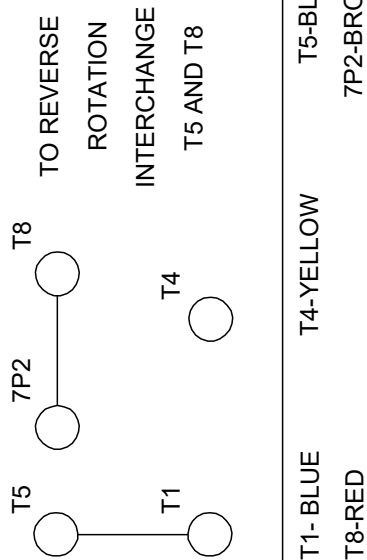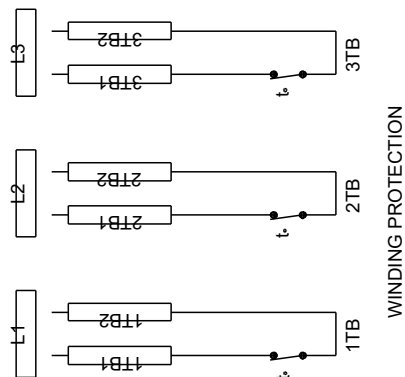

All units are [in] unless otherwise presented.