

10SVI1515GK4C6S0

Technical data

Company Name
Contact
Phone number
E-Mail address

Operating data

1	Pumpe type	Single head pump	Fluid	Water
2	No. of pumps	1	Operating temperature t A	°F 39.2
3	Nominal flow	US g.p.m. 0	Max/Min Operating Temperature	°F /
4	Nominal head	ft 0	pH-value at t A	7
5	Static head	ft 0	Density at t A	lb/ft³ 62.4
6	Inlet pressure	psi 0	Kin. viscosity at t A	ft²/s 1.689E-5
7	Environmental temperature	°F 68	Vapor pressure at t A	psi 14.5
8	Available system NPSH	ft 0	Altitude	0

Pump data

9	Design	Multi-Stage Pumps		
10	Impellers	15	Impeller Ø	Max. inch 0.000
11	Total stages	15		designed
12	Blank stages	0		Min. inch 0.000
13	Operating speed	rpm 3500		Nominal US g.p.m.
14	Discharge flange	2" Female NPT	Flow	Max- US g.p.m. 75
15	Max. casing pressure	psi		Min- US g.p.m.
16	Max. working pressure	psi 355.2		Nominal ft
17	Impeller type	Enclosed	Head	at Qmax ft 388.6
18	Head H(Q=0)	ft 820		at Qmin ft 819.2
19	Max. shaft power	hp 13.5	Shaft power	hp
20	Pump weight	kg 68.4 lb	Efficiency	%
21	Total weight	lb 332.4	NPSH 3%	ft

Materials

22		Pump		Mechanical seal
23	1 - Discharge Head - Motor Adapter	Cast iron / ASTM Class 35	[S] = e-SVI Standard seal (coupled)	
24	2 - Impeller	Stainless steel / AISI 304	e-SVI Coupled seal	
25	3 - Diffuser	Stainless steel / AISI 304	Mechanical seal diameter	
26	4 - Casing	Stainless steel / AISI 316L	1 - Rotating part	Silicon carbide
27	5 - Shaft	Stainless steel / AISI 316	2 - Stationary part	Resin impregnated carbon
28	6 - Suction Base	Stainless steel / ASTM CF8M (AISI 316 cast)	3 - Elastomers	FKM
29	7 - Strainer	Stainless steel / AISI 316	4 - Springs	AISI 316
30	8 - Coupling	Aluminium	5 - Other components	AISI 316
31	9 - Seal Housing	Stainless steel / ASTM CF8M (AISI 316 cast)		
32	10 - Mechanical Seal	Refer Mechanical Seal		
33	11 - Cartridge Seal	Refer Mechanical Seal		
34	12 - Elastomers	Refer Mechanical Seal		
35	13 - Coupling Guard	Stainless steel / AISI 304		
36	14 - Shaft Sleeve and Bushing	Tungsten carbide		
37	15 - Tie Rods	Stainless steel / AISI 316		
38	16 - Screws	Stainless steel / AISI 316		
39	17 - Inducer	Stainless steel / ASTM CF8M (AISI 316 cast)		
40				
41				

Motor data

42	Manufacturer	Baldor		
43	Specific design	3ph TEPE		
44	Type	230/460V 254TC (V13A32F5BK2S)		
45	Rated power	15 hp	Item no.	
46	Nominal speed	3510 rpm	Service factor	1.15
47	Frame size	254TC	Electric data	230 V 34.8 A
48	Weight	lb 264.0	Shaft diameter	0.0 mm

Remarks

Project	Project ID	Created by	Created on 03-02-22	Last update 03-02-22
---------	------------	------------	------------------------	-------------------------

10SVI1515GK4C6S0

Performance Curve


Company Name
Contact
Phone number
E-Mail address

	Ø inch	Delivered Flow Application Range			Lift Capability		Shaft Power P2			Frequency	Hz	60
		Min. US g.p.m.	Max. US g.p.m.	Max. US g.p.m.	H(Q=0) ft	η Max. ft	P2(Q=0) hp	Max. hp	η Max. hp	Operating speed rpm		3500
Is	0.000	0	75	55	819	625	0.0998	13.5	12.7	Nominal flow	US g.p.m.	0
Min.	0.000	/	/	55	819	625	0.0998	/	12.7	Nominal head	ft	0
Max.	0.000	/	/	55	819	625	0.0998	/	12.7	Inlet pressure	psi	0
										Static head	ft	0

Power data referred to:

Hydr. performance acceptance acc. to EN ISO 9906 Class

Water [100%] ; 39.2°F; 62.4lb/ft³; 1.69E-5ft²/s

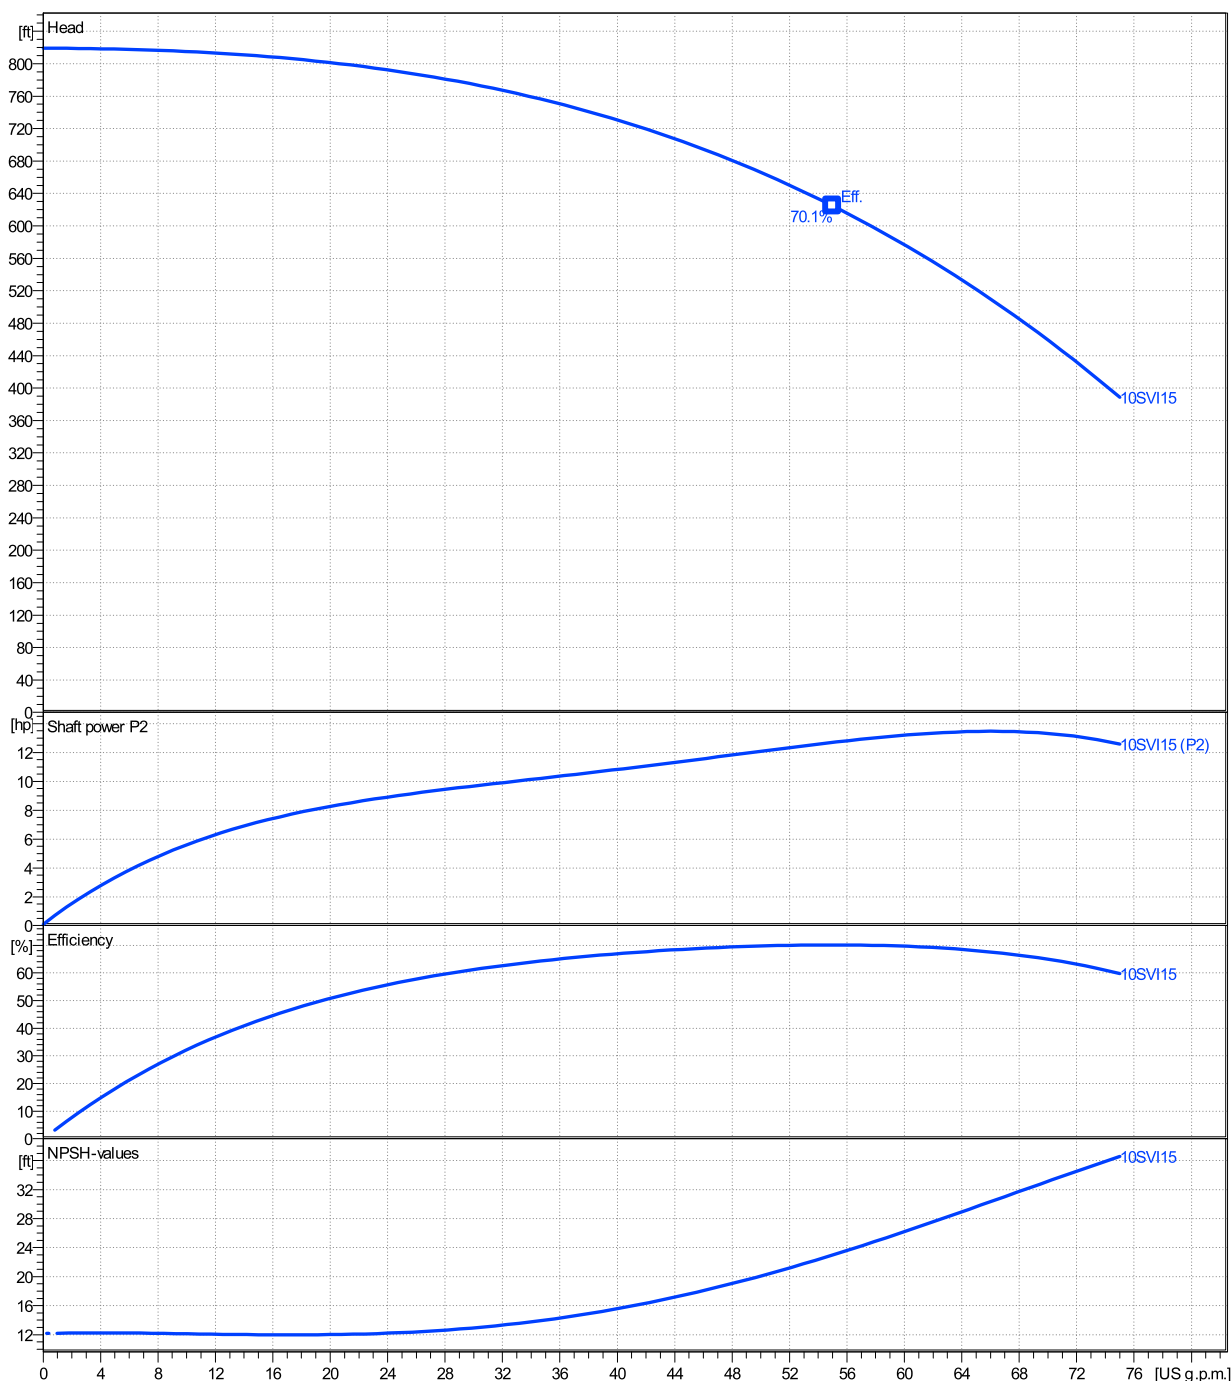


Project	Project ID	Created by	Created on 03-02-22	Last update 03-02-22
---------	------------	------------	------------------------	-------------------------

10SVI1515GK4C6S0

Dimensions

Company Name
Contact
Phone number
E-Mail address

10 e-SVI DIMENSIONS

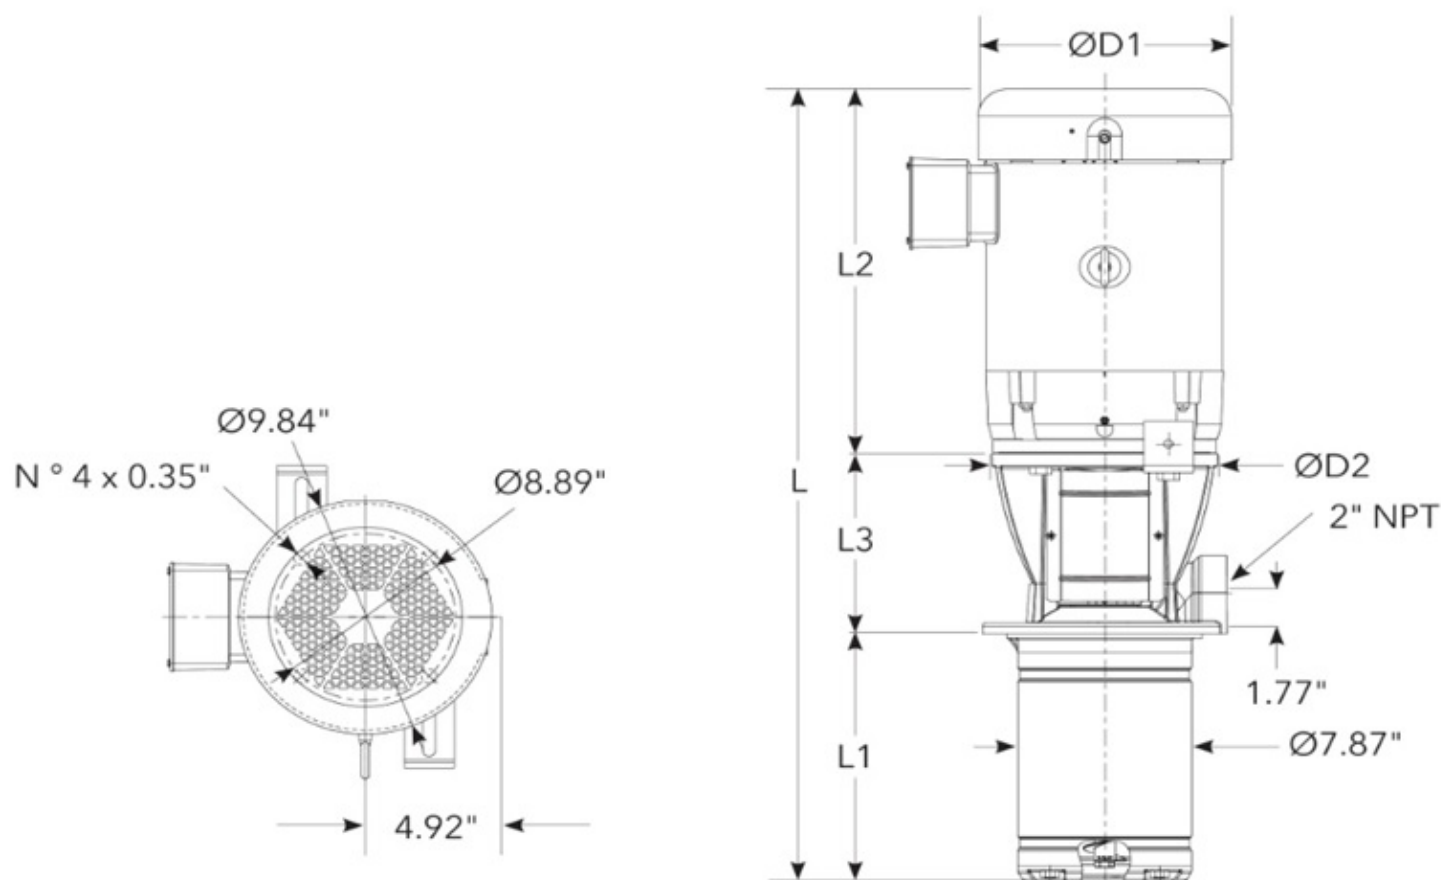

Dimensions [inch]

D1	10 ¹ / ₄
D2	9 ¹ / ₁₆
L	48 ⁷ / ₁₆
L1	23
L2	16 ⁹ / ₁₆
L3	8 ¹³ / ₁₆

Weight (+/- 5%)

Pump	68 lb
Motor	264 lb
Blank stages	0
Total weight	332 lb

Weight table for blank stages

1-3SVI	0.44 lb per stage
5SVI	0.53 lb per stage
10SVI	1.26 lb per stage
15-22SVI	1.74 lb per stage

Dimensions and weight without obligation

Project	Project ID	Created by	Created on 03-02-22	Last update 03-02-22
---------	------------	------------	------------------------	-------------------------