



TECHNICAL SPECIFICATIONS

Flow rate:	Up to 2 gpm (8 l/m)
Capacity:	0.03 g/rev (0.11 l/rev)
Discharge:	Up to 145 psi (10 bar)
Temperature:	Up to 176 °F (80 °C)
Hose:	5/8" (16 mm) inner diameter Natural rubber (NR) EPDM rubber FDA-compliant nitrile rubber (Buna-N/NBR) Hypalon® rubber (CSM)
Connections:	3/4" NPT or tri-clamp 316 stainless steel Polypropylene (PP) PVDF/PTFE
Housing:	Cast aluminum with powder coating
Rollers:	Anodized aluminum

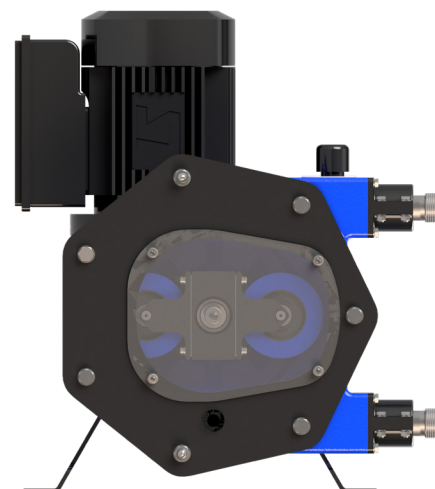

INDUSTRIAL VERSION

MAIN FEATURES AND BENEFITS

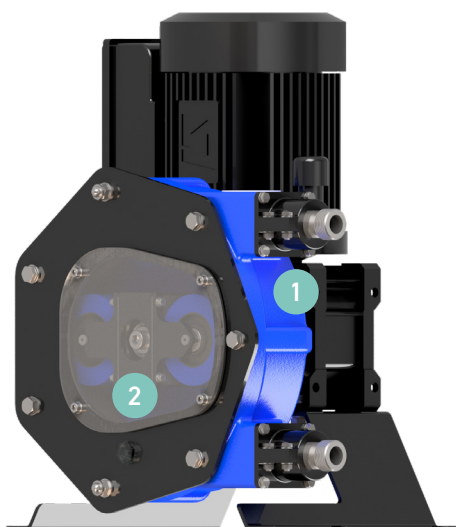

1 EXTREMELY HEAVY-DUTY DESIGN

Offers unrivaled pump life and superior performance in the harshest conditions.

2 EASY ASSEMBLY, OPERATION AND MAINTENANCE


Decreases cost and downtime.

3 NEWEST PERISTALTIC-HOSE TECHNOLOGY

Provides a longer hose life with fast, easy replacement.


4 XXL-ROLLER TECHNOLOGY

Generates major energy savings and a higher number of hose working hours.





REQUIRED MOTOR POWER

PRODUCT TEMPERATURE

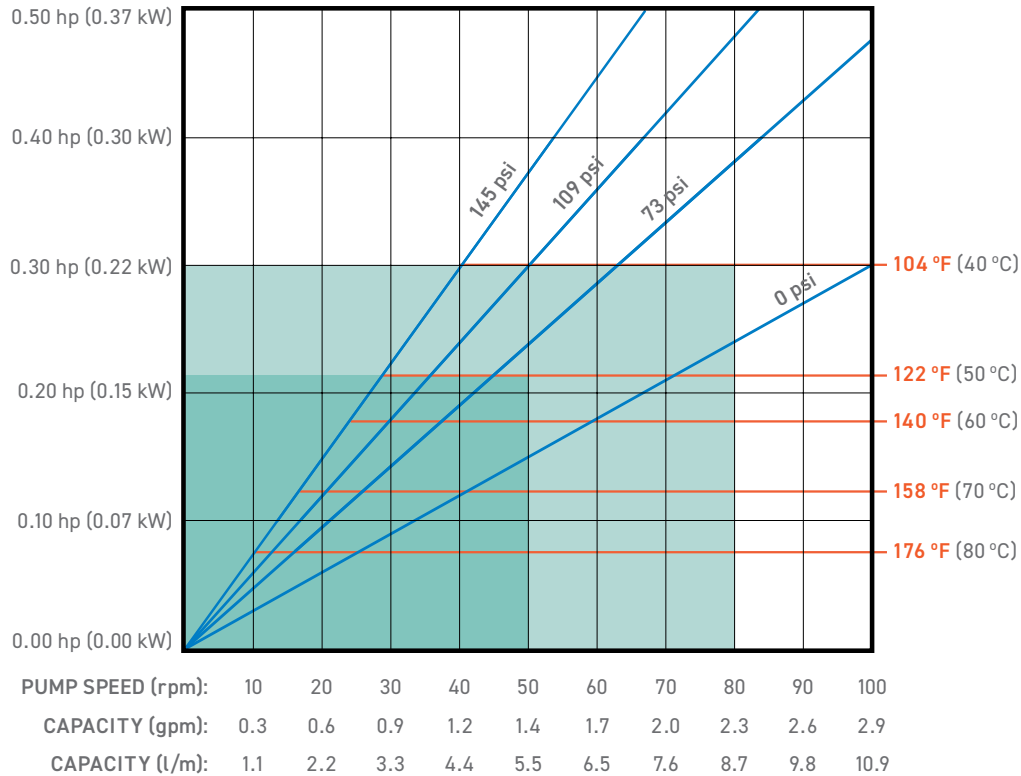

PRESSURE:	0 psi (0 kPa)	73 psi (500 kPa)	109 psi (750 kPa)	145 psi (1,000 kPa)
TORQUE:	177 in-lb (20 Nm)	257 in-lb (29 Nm)	381 in-lb (43 Nm)	443 in-lb (50 Nm)

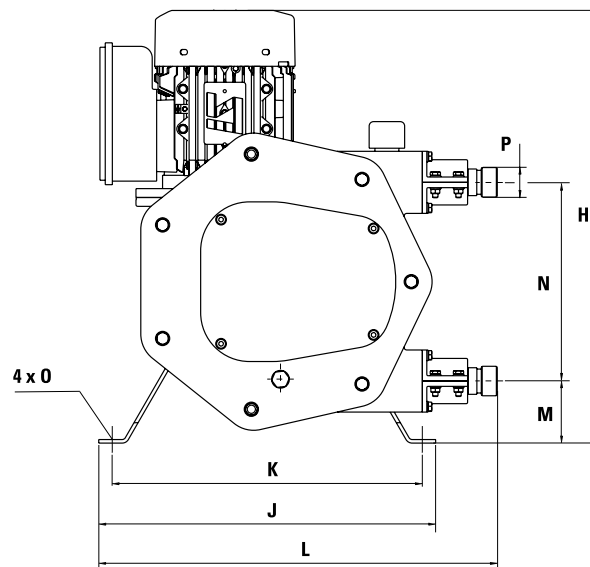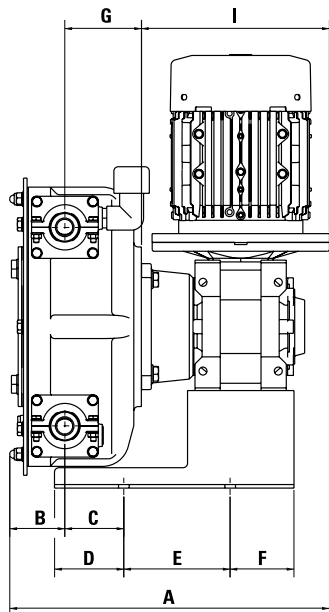

I17	A*	B	C	D	E	F	G	H	I*	J	K	L	M	N	O	P
in:	11 1/2	2 3/16	2 3/8	3 1/8	4 3/4	1	2 5/8	17 3/16	6 11/16	12 5/8	11 1/4	14 7/8	2 1/2	7 11/16	1/2	3/4" NPT**
mm:	293	56	61	80	120	26	67	437	170	320	285	378	63	195	12	

*Depending on the driver, dimensions could change.

**Also available in 3/4" tri-clamp (ASTM A270, ASME BPE).