



TECHNICAL SPECIFICATIONS

Flow rate:	Up to 4 gpm (15 l/m)
Capacity:	0.06 g/rev (0.23 l/rev)
Discharge:	Up to 145 psi (10 bar)
Temperature:	Up to 176 °F (80 °C)
Hose:	7/8" (22 mm) inner diameter Natural rubber (NR) EPDM rubber FDA-compliant nitrile rubber (Buna-N/NBR) Hypalon® rubber (CSM)
Connections:	1" NPT or tri-clamp 316 stainless steel Polypropylene (PP) PVDF/PTFE
Housing:	Cast aluminum with powder coating
Rollers:	Anodized aluminum

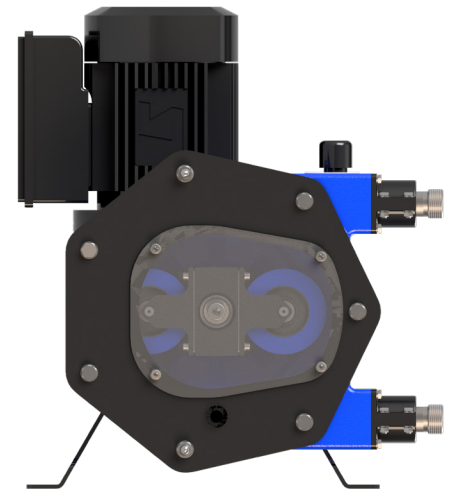

INDUSTRIAL VERSION

MAIN FEATURES AND BENEFITS

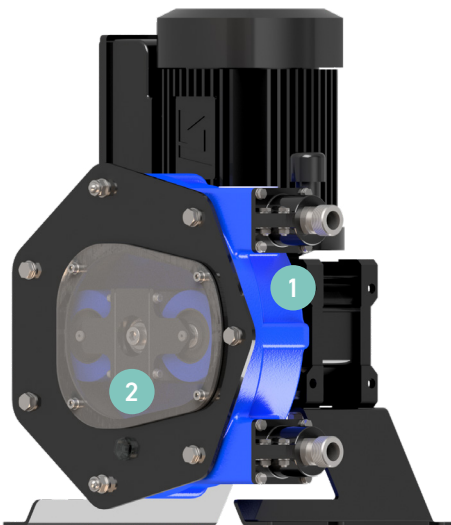

1 EXTREMELY HEAVY-DUTY DESIGN

Offers unrivaled pump life and superior performance in the harshest conditions.

2 EASY ASSEMBLY, OPERATION AND MAINTENANCE



Decreases cost and downtime.

3 NEWEST PERISTALTIC-HOSE TECHNOLOGY

Provides a longer hose life with fast, easy replacement.


4 XXL-ROLLER TECHNOLOGY

Generates major energy savings and a higher number of hose working hours.





REQUIRED MOTOR POWER

PRODUCT TEMPERATURE

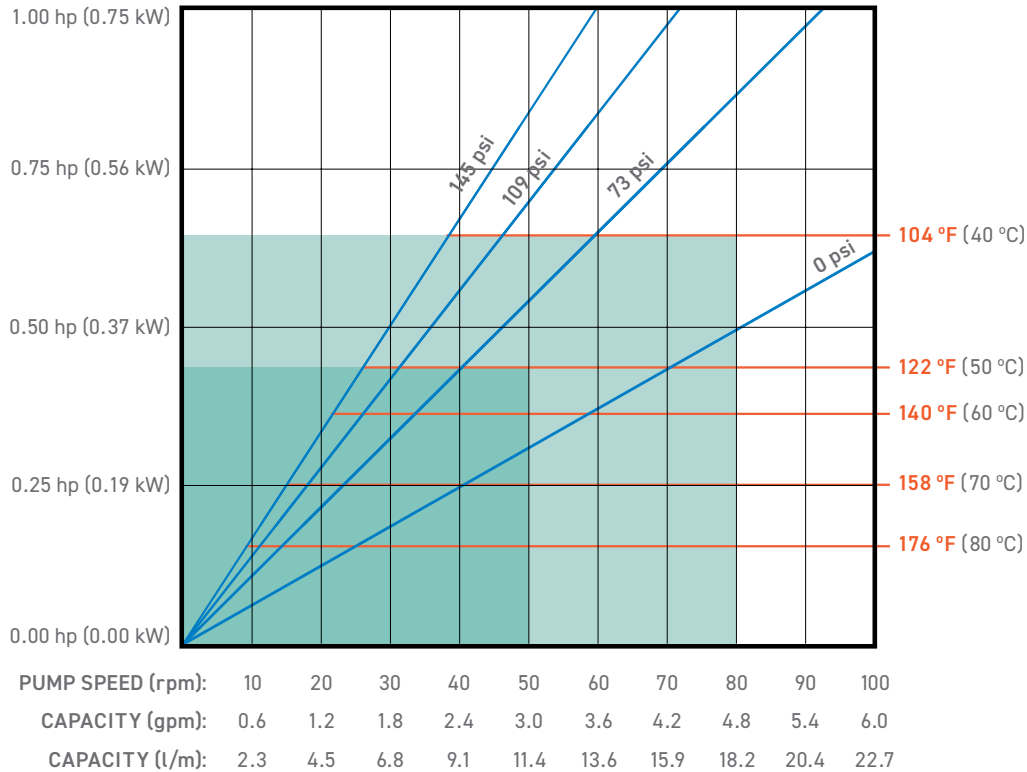

PRESSURE:	0 psi (0 kPa)	73 psi (500 kPa)	109 psi (750 kPa)	145 psi (1,000 kPa)
TORQUE:	398 in-lb (45 Nm)	664 in-lb (75 Nm)	885 in-lb (100 Nm)	1,062 in-lb (120 Nm)

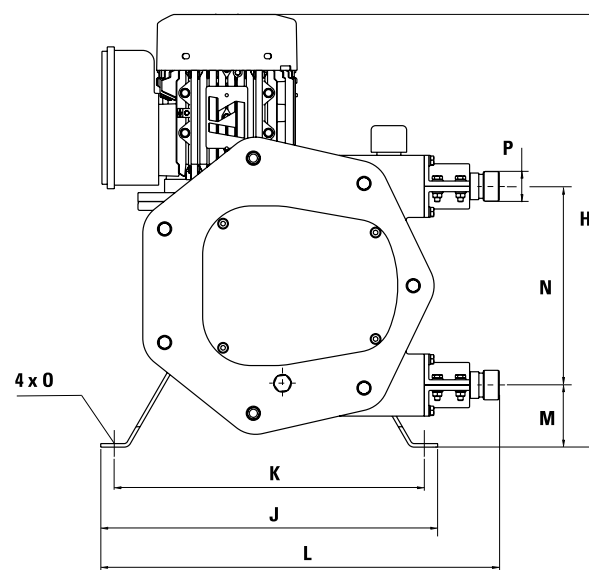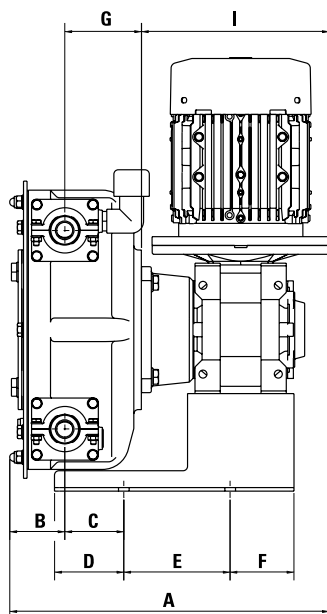

I21	A*	B	C	D	E	F	G	H	I*	J	K	L	M	N	O	P
in:	14 3/16	2 7/16	2 5/8	3 1/16	4 3/4	2 13/16	3 3/8	19 3/16	8 3/8	14 15/16	13 3/4	17 11/16	2 3/4	8 13/16	1/2	1" NPT**
mm:	361	62	67	78	120	72	87	488	212	380	350	450	70	224	12	

*Depending on the driver, dimensions could change.

**Also available in 1" tri-clamp (ASTM A270, ASME BPE).