



TECHNICAL SPECIFICATIONS

Flow rate:	Up to 8 gpm (30 l/m)
Capacity:	0.12 g/rev (0.47 l/rev)
Discharge:	Up to 145 psi (10 bar)
Temperature:	Up to 176 °F (80 °C)
Hose:	1 1/8" (28 mm) inner diameter Natural rubber (NR) EPDM rubber FDA-compliant nitrile rubber (Buna-N/NBR)
Connections:	1" flange or 1 1/2" tri-clamp 316 stainless steel Polypropylene (PP) PVDF/PTFE
Housing:	Cast iron with powder coating
Rollers:	Anodized aluminum

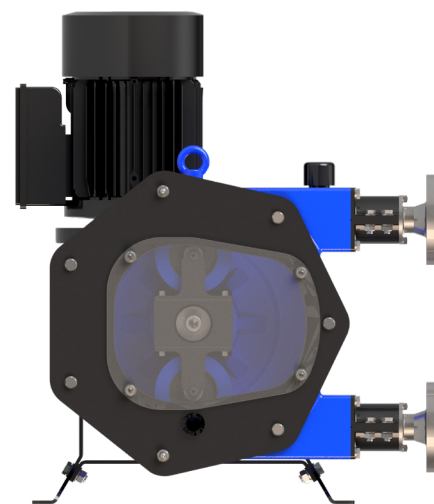

INDUSTRIAL VERSION

MAIN FEATURES AND BENEFITS

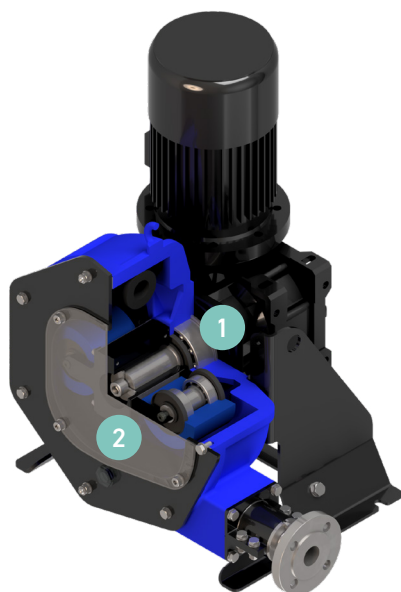

1 EXTREMELY HEAVY-DUTY DESIGN

Offers unrivaled pump life and superior performance in the harshest conditions.

2 EASY ASSEMBLY, OPERATION AND MAINTENANCE


Decreases cost and downtime.

3 NEWEST PERISTALTIC-HOSE TECHNOLOGY

Provides a longer hose life with fast, easy replacement.


4 XXL-ROLLER TECHNOLOGY

Generates major energy savings and a higher number of hose working hours.





REQUIRED MOTOR POWER

PRODUCT TEMPERATURE

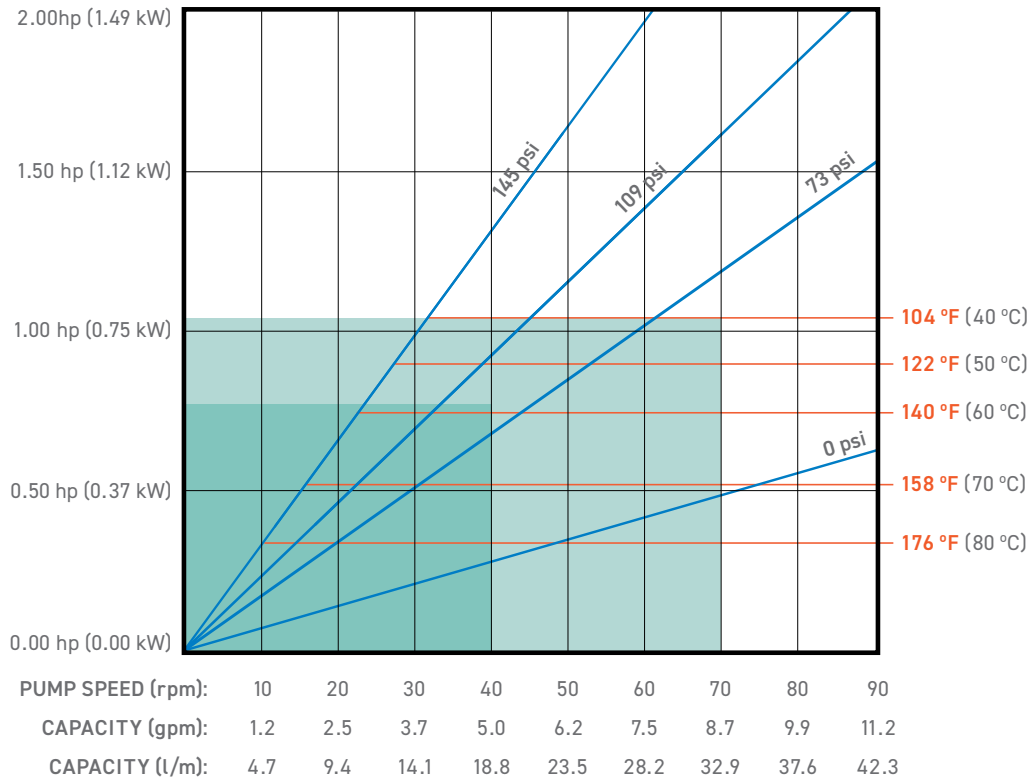

PRESSURE:	0 psi (0 kPa)	73 psi (500 kPa)	109 psi (750 kPa)	145 psi (1,000 kPa)
TORQUE:	443 in-lb (50 Nm)	1,106 in-lb (125 Nm)	1,460 in-lb (165 Nm)	1,991 in-lb (225 Nm)

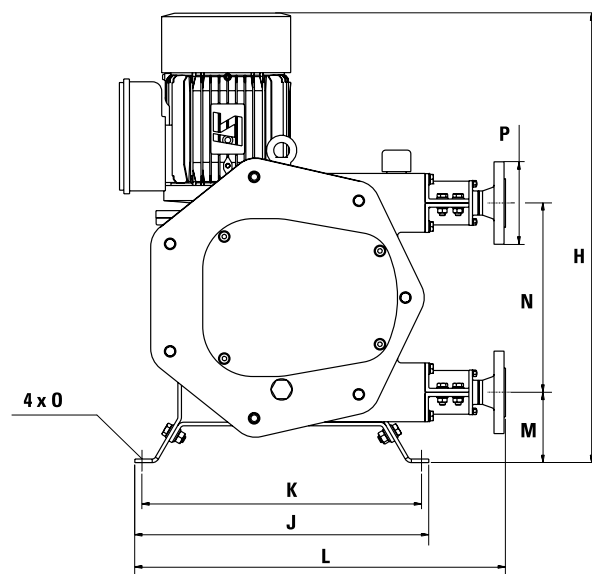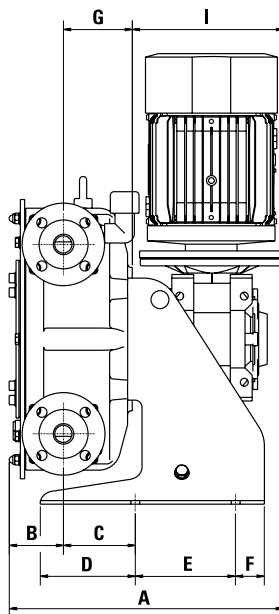

I28	A*	B	C	D	E	F	G	H	I*	J	K	L	M	N	O	P
in:	15 1/16	3	3 15/16	5 3/16	5 1/2	1 9/16	3 3/4	24 11/16	8 5/16	16 1/8	15 3/8	20 3/8	3 7/8	10 3/8	1/2	1" flange**
mm:	383	76	100	133	140	40	96	627	211	410	390	517	98	264	12	

*Depending on the driver, dimensions could change.

**Also available in 1 1/2" tri-clamp (ASTM A270, ASME BPE).