



TECHNICAL SPECIFICATIONS

Flow rate:	Up to 15 gpm (57 l/m)
Capacity:	0.24 g/rev (0.89 l/rev)
Discharge:	Up to 145 psi (10 bar)
Temperature:	Up to 176 °F (80 °C)
Hose:	1 3/8" (35 mm) inner diameter Natural rubber (NR) EPDM rubber FDA-compliant nitrile rubber (Buna-N/NBR)
Connections:	1 1/4" flange or 1 1/2" tri-clamp 316 stainless steel Polypropylene (PP) PVDF/PTFE
Housing:	Cast iron with powder coating
Rollers:	Anodized aluminum

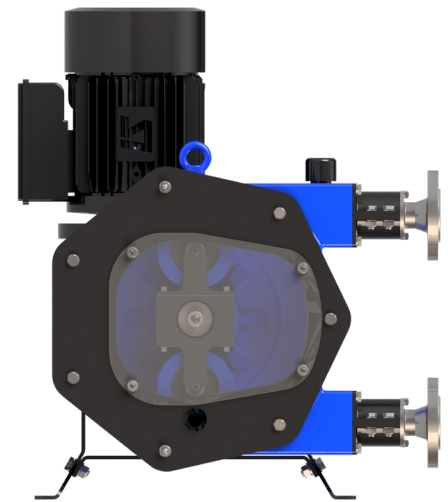

INDUSTRIAL VERSION

MAIN FEATURES AND BENEFITS

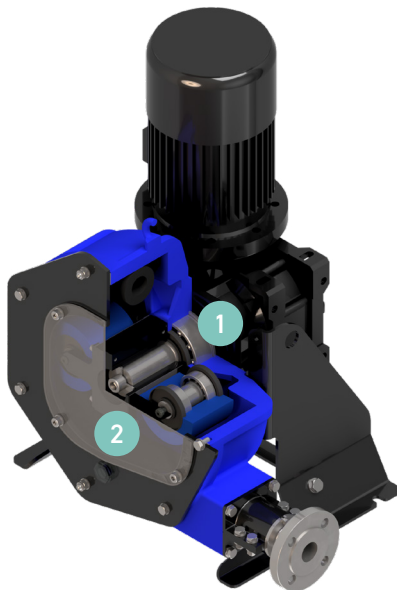

1 EXTREMELY HEAVY-DUTY DESIGN



Offers unrivaled pump life and superior performance in the harshest conditions.

2 EASY ASSEMBLY, OPERATION AND MAINTENANCE

Decreases cost and downtime.

3 NEWEST PERISTALTIC-HOSE TECHNOLOGY

Provides a longer hose life with fast, easy replacement.




4 XXL-ROLLER TECHNOLOGY

Generates major energy savings and a higher number of hose working hours.



REQUIRED MOTOR POWER

PRODUCT TEMPERATURE

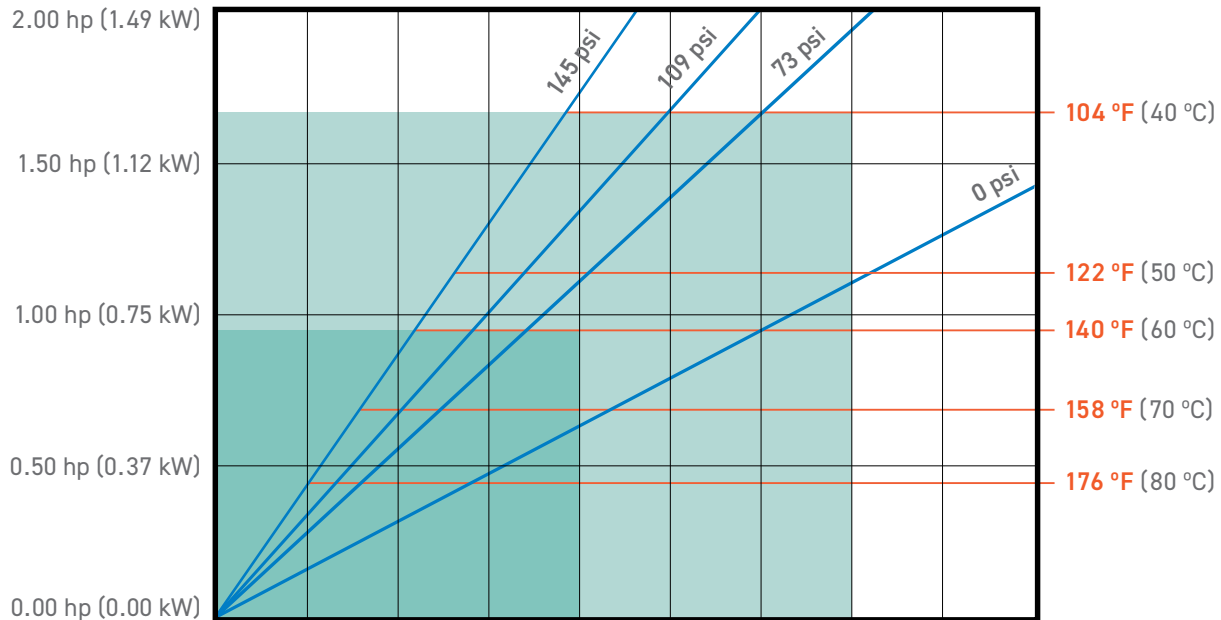

PUMP SPEED (rpm):	10	20	30	40	50	60	70	80	90
CAPACITY (gpm):	2.4	4.7	7.1	9.4	11.8	14.1	16.5	18.8	21.2
CAPACITY (l/m):	8.9	17.8	26.7	35.6	44.5	53.4	62.3	71.2	80.1

PRESSURE:	0 psi (0 kPa)	73 psi (500 kPa)	109 psi (750 kPa)	145 psi (1,000 kPa)
TORQUE:	974 in-lb (110 Nm)	1,726 in-lb (195 Nm)	2,080 in-lb (235 Nm)	2,655 in-lb (300 Nm)

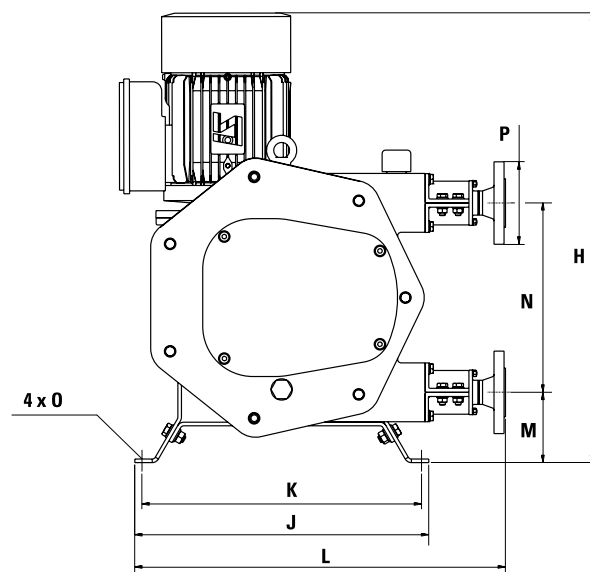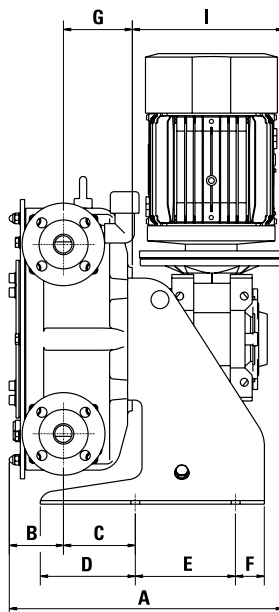

I35	A*	B	C	D	E	F	G	H	I*	J	K	L	M	N	O	P
in:	16 1/16	3 3/8	5 5/16	6 3/8	5 1/2	1 9/16	4 7/16	26 5/8	8 5/16	18 1/8	17 5/16	22 15/16	4 1/8	13	1/2	1 1/4" flange**
mm:	409	86	135	162	140	40	113	677	211	460	440	583	105	330	12	

*Depending on the driver, dimensions could change.

**Also available in 1 1/2" tri-clamp (ASTM A270, ASME BPE).