



TECHNICAL SPECIFICATIONS

Flow rate:	Up to 30 gpm (114 l/m)
Capacity:	0.45 g/rev (1.69 l/rev)
Discharge:	Up to 145 psi (10 bar)
Temperature:	Up to 176 °F (80 °C)
Hose:	1 11/16" (43 mm) inner diameter Natural rubber (NR) EPDM rubber FDA-compliant nitrile rubber (Buna-N/NBR)
Connections:	1 1/2" flange or 2" tri-clamp 316 stainless steel Polypropylene (PP) PVDF/PTFE
Housing:	Cast iron with powder coating
Rollers:	Anodized aluminum

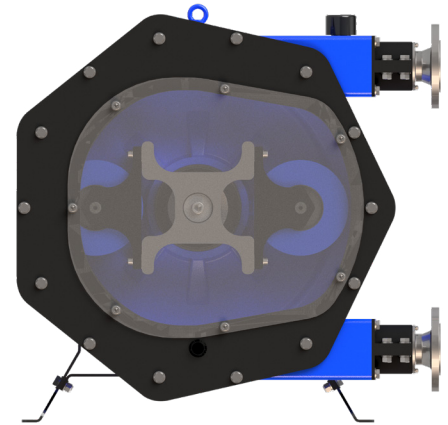

INDUSTRIAL VERSION

MAIN FEATURES AND BENEFITS

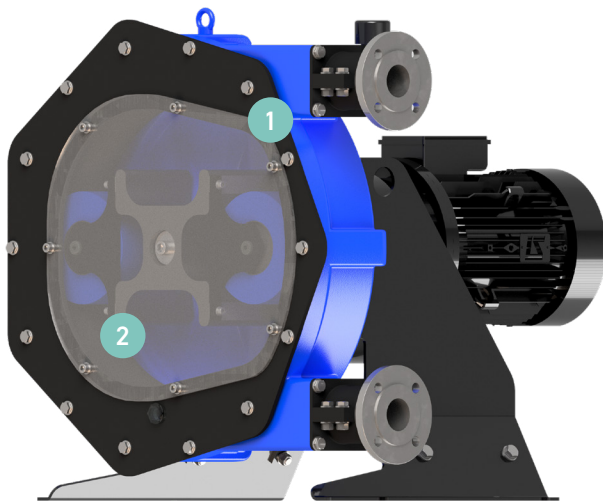

1 EXTREMELY HEAVY-DUTY DESIGN



Offers unrivaled pump life and superior performance in the harshest conditions.

2 EASY ASSEMBLY, OPERATION AND MAINTENANCE

Decreases cost and downtime.

3 NEWEST PERISTALTIC-HOSE TECHNOLOGY

Provides a longer hose life with fast, easy replacement.




4 XXL-ROLLER TECHNOLOGY


Generates major energy savings and a higher number of hose working hours.

REQUIRED MOTOR POWER

PRODUCT TEMPERATURE

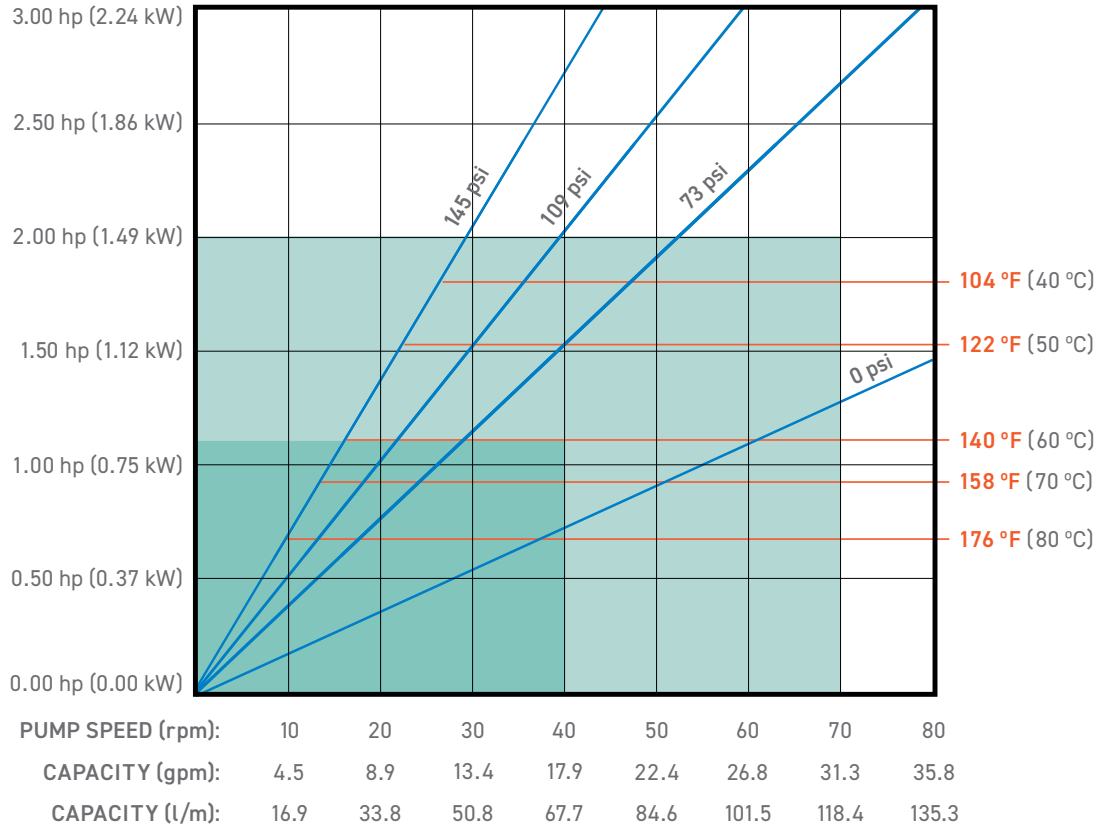

PRESSURE:	0 psi (0 kPa)	73 psi (500 kPa)	109 psi (750 kPa)	145 psi (1,000 kPa)
TORQUE:	1,106 in-lb (125 Nm)	2,434 in-lb (275 Nm)	3,142 in-lb (355 Nm)	4,204 in-lb (475 Nm)

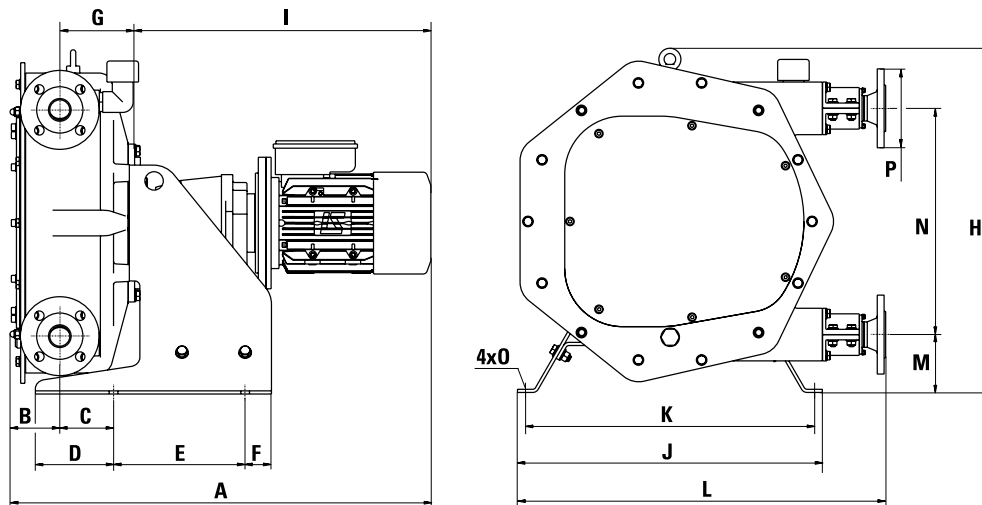

I43	A*	B	C	D	E	F	G	H	I*	J	K	L	M	N	O	P
in:	31 1/2	3 13/16	4	5 7/8	9 13/16	1 15/16	5 9/16	25 13/16	22 3/16	22 13/16	21 5/8	27 9/16	4 5/16	16 15/16	5/8	1 1/2" flange**
mm:	801	97	102	149	250	50	142	655	564	580	550	700	110	430	16	

*Depending on the driver, dimensions could change.

**Also available in 2" tri-clamp (ASTM A270, ASME BPE).