

|                 |                  |           |
|-----------------|------------------|-----------|
| PROJECT:        | UNIT TAG:        | QUANTITY: |
| REPRESENTATIVE: | TYPE OF SERVICE: | DATE:     |
| ENGINEER:       | SUBMITTED BY:    | DATE:     |
| CONTRACTOR:     | APPROVED BY:     | DATE:     |
|                 | ORDER NO.:       | DATE:     |





CRN 32-1-1 A-G-A-V-HQQV

Vertical, multistage centrifugal pump with suction and discharge ports on the same level. Pump materials in contact with the liquid are in high-grade stainless steel (EN 1.4401)

Note! Product picture may differ from actual product



| Conditions of Service |       | Pump Data                    |                  | Motor Data        |           |
|-----------------------|-------|------------------------------|------------------|-------------------|-----------|
| Liquid:               | Water | Max pressure at stated temp: | 232 psi / 194 °F | Rated power - P2: | 5 HP      |
| Temperature:          | 68 °F | Liquid temperature range:    | -4 .. 194 °F     | Rated voltage:    | 208-230 V |
| Specific Gravity:     | 1.000 | Maximum ambient temperature: | 104 °F           | Mains frequency:  | 60 Hz     |
|                       |       | Shaft seal:                  | HQQV             | Enclosure class:  | IP55      |
|                       |       | Product number:              | 99918024         | Insulation class: | F         |
|                       |       |                              |                  | Motor protection: | PTO       |
|                       |       |                              |                  | Motor type:       | WEG       |
|                       |       |                              |                  | Eta 1/1:          | 84.0 %    |

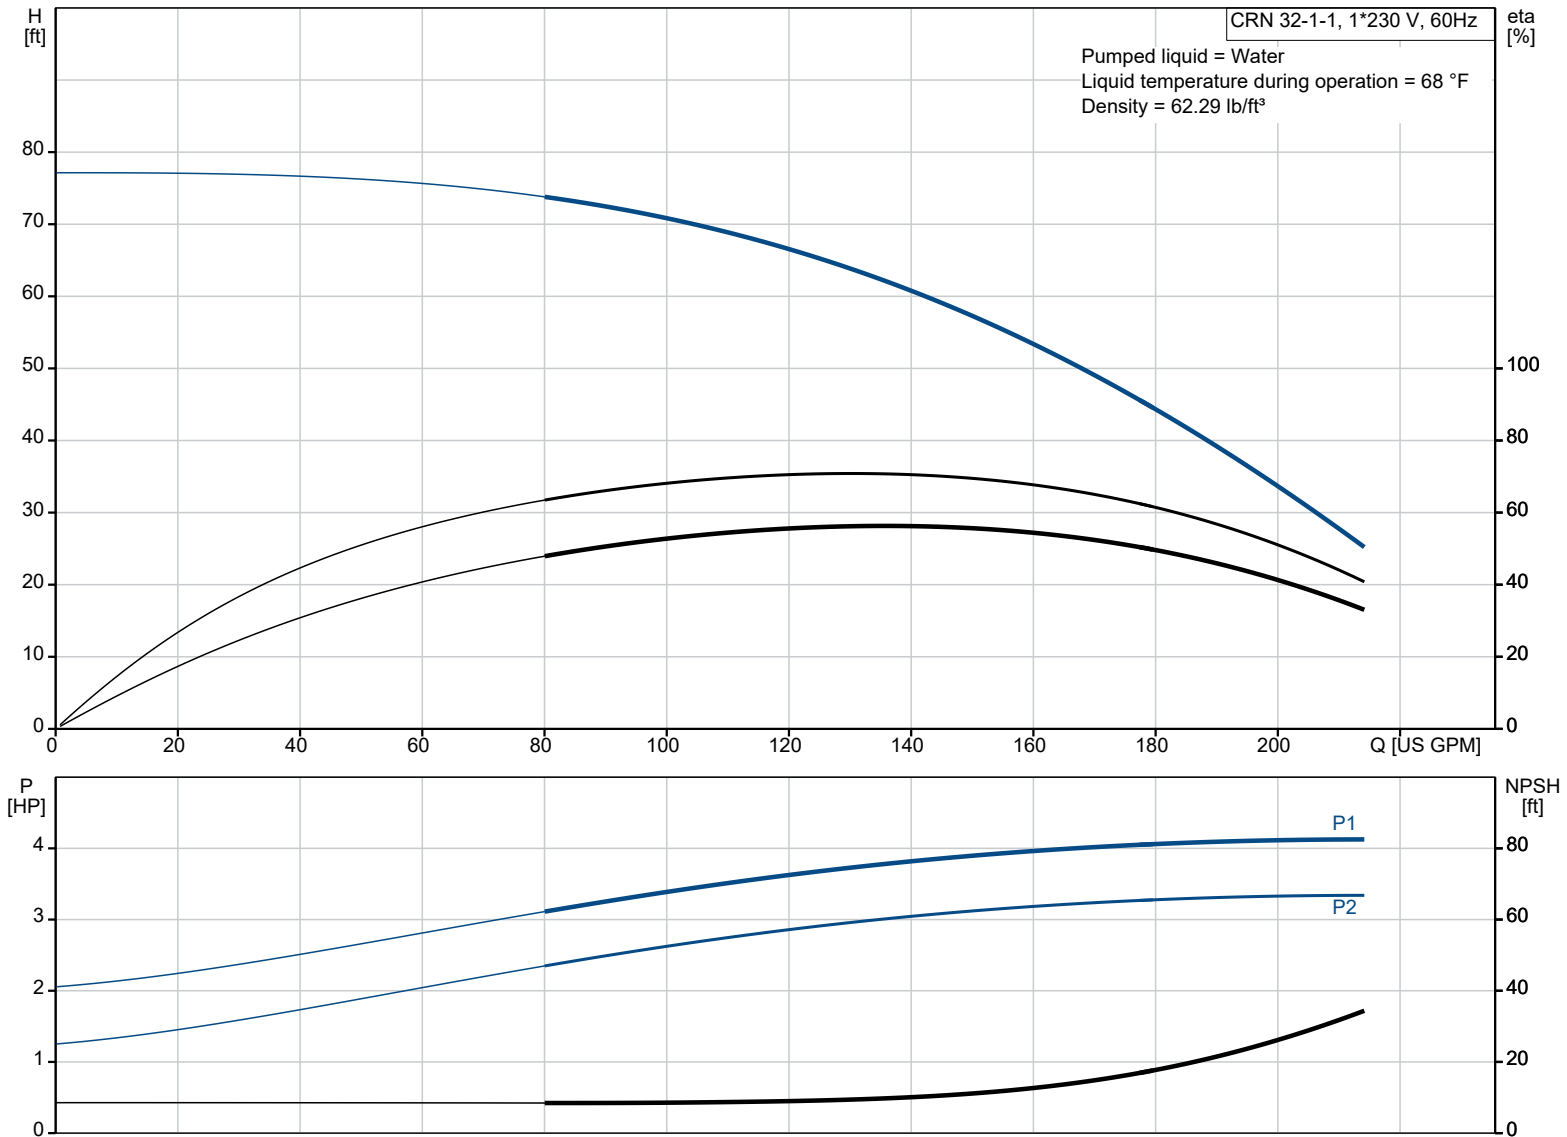

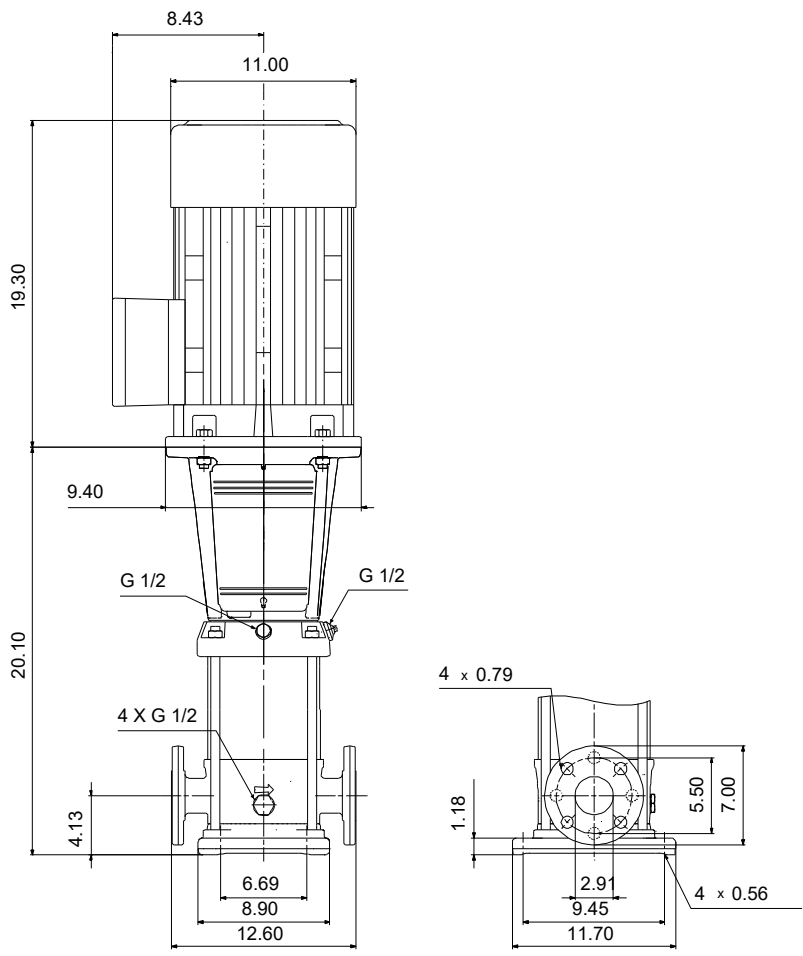


**Materials:**

- Base: Stainless steel
- Base: EN 1.4408
- Base: AISI 316
- Impeller: Stainless steel
- Impeller: AISI 316
- Impeller: EN 1.4401
- Material code: A
- Code for rubber: V
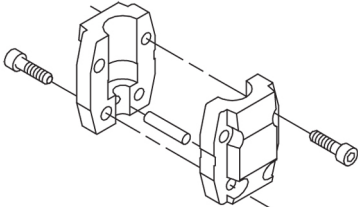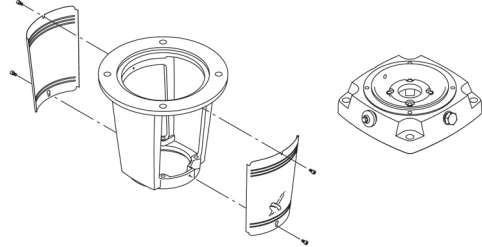
| Qty. | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | <p><b>CRN 32-1-1 A-G-A-V-HQQV</b></p>  <p>Product No.: <a href="#">99918024</a></p> <p>Vertical, multistage centrifugal pump with inlet and outlet ports on same the level (inline). Pump materials in contact with the liquid are in high-grade stainless steel. A cartridge shaft seal ensures high reliability, safe handling, and easy access and service. Power transmission is via a rigid split coupling. Pipe connection is via ANSI flanges.</p> <p>The pump is fitted with a 1-phase, fan-cooled asynchronous motor.</p> <p><b>Further product details</b></p> <p>Steel, cast iron and aluminium components have an epoxy-based coating made in a cathodic electro-deposition (CED) process. CED is a high-quality dip-painting process where an electrical field around the products ensures deposition of paint particles as a thin, well-controlled layer on the surface.</p> <p>An integral part of the process is a pretreatment.</p> <p>The entire process consists of these elements:</p> <ol style="list-style-type: none"> <li>1) Alkaline-based cleaning.</li> <li>2) Zinc phosphating.</li> <li>3) Cathodic electro-deposition.</li> <li>4) Curing to a dry film thickness 18-22 my m.</li> </ol> <p>The colour code for the finished product is NCS 9000/RAL 9005.</p> <p><b>Pump</b></p> <p>A standard split coupling connects the pump and motor shaft. It is enclosed in the pump head/motor stool by means of two coupling guards.</p>  <p>The motor stool connects the pump head and motor. The pump head has a combined 1/2" priming plug and vent screw.</p>  <p>The pump is fitted with a balanced O-ring seal unit with a rigid torque-transmission system. This seal type is assembled in a cartridge unit which makes replacement safe and easy. Due to the balancing, this seal type is suitable for high-pressure applications. The cartridge construction also protects the pump shaft from possible wear from a dynamic O-ring between pump shaft and shaft seal.</p> <p>Seal faces:</p> <ul style="list-style-type: none"> <li>• Rotating seal ring material: silicon carbide (SiC)</li> <li>• Stationary seat material: silicon carbide (SiC)</li> </ul> <p>This material pairing is used where higher corrosion resistance is required. The high hardness of this material pairing offers good resistance against abrasive particles.</p> <p>Secondary seal material: FKM (fluorocarbon rubber)</p> <p>FKM has excellent resistance to oils and chemicals. Above 90 °C, FKM should only be used in media without water.</p> |


| Qty. | Description |
|------|-------------|
|------|-------------|

1

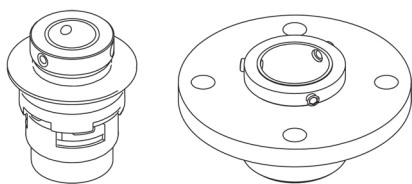

The shaft seal is retained in the pump head by a cover and screws. It can be replaced without removing the motor.  
The chambers and impellers are made of stainless-steel sheet. The chambers are provided with a PTFE neck ring offering improved sealing and high efficiency. The impellers have smooth surfaces, and the shape of the blades ensure a high efficiency.

The pump has a stainless-steel base mounted on a separate base plate.  
The base and base plate are kept in position by the tension of the staybolts which hold the pump together.  
Both the inlet and the outlet side of the base have two pressure gauge tapings.  
The pump is secured to the foundation by four bolts through the base plate.  
The flanges are fastened to the base by means of locking rings.



## Motor

The motor is a totally enclosed, fan-cooled motor with principal dimensions to IEC and DIN standards. The motor is flange-mounted with tapped-hole flange (FT).

Motor-mounting designation in accordance with IEC 60034-7: IM B 14 (Code I) / IM 3601 (Code II).

Electrical tolerances comply with IEC 60034.

The motor has built-in thermal protection (PTO current and temperature sensors) in accordance with IEC 60034-11 and requires no further motor protection. The protection reacts to both slow- and quick-rising temperatures, e.g. constant overload and stalled conditions.

As the thermal protection incorporates automatic reset, the motor must be connected in a way which ensures that the automatic reset cannot cause accidents.

## Technical data

Liquid:

Pumped liquid: Water  
Liquid temperature range: -4 .. 194 °F  
Selected liquid temperature: 68 °F  
Density: 62.29 lb/ft³

Technical:

Pump speed on which pump data are based: 3457 rpm  
Rated flow: 159 US GPM  
Rated head: 43.97 ft  
Actual impeller diameter: 4.66 in  
Pump orientation: Vertical  
Shaft seal arrangement: Single  
Code for shaft seal: HQQV  
Approvals: CURUS  
Curve tolerance: ISO9906:2012 3B

Materials:

Base: Stainless steel  
EN 1.4408  
AISI 316  
Impeller: Stainless steel  
EN 1.4401  
AISI 316  
Bearing: SIC  
Support bearing: Graflon


| Qty. | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | <p>Installation:</p> <p>t max amb: 104 °F</p> <p>Maximum operating pressure: 232.06 psi</p> <p>Max pressure at stated temp: 232 psi / 194 °F<br/>232 psi / -4 °F</p> <p>Type of connection: ANSI</p> <p>Size of inlet connection: 2 1/2 inch</p> <p>Size of outlet connection: 2 1/2 inch</p> <p>Pressure rating for connection: PN 16</p> <p>Flange rating inlet: 150 lb</p> <p>Flange size for motor: 182TC</p> <p>Electrical data:</p> <p>Motor standard: NEMA</p> <p>Motor type: WEG</p> <p>Rated power - P2: 5 HP</p> <p>Power (P2) required by pump: 5 HP</p> <p>Mains frequency: 60 Hz</p> <p>Rated voltage: 1 x 208-230 V</p> <p>Service factor: 1.15</p> <p>Rated current: 31.7-25.3 A</p> <p>Starting current: 800-800 %</p> <p>Cos phi - power factor: 0.98</p> <p>Rated speed: 3515 rpm</p> <p>IE efficiency: 84.0%</p> <p>Motor efficiency at full load: 84.0 %</p> <p>Motor efficiency at 3/4 load: 82.0 %</p> <p>Motor efficiency at 1/2 load: 76.4 %</p> <p>Number of poles: 2</p> <p>Enclosure class (IEC 34-5): IP55</p> <p>Insulation class (IEC 85): F</p> <p>Motor No: 99883304</p> <p>Controls:</p> <p>Frequency converter: NONE</p> <p>Others:</p> <p>DOE Pump Energy Index CL: 0.87</p> <p>Net weight: 247 lb</p> <p>Gross weight: 265 lb</p> <p>Shipping volume: 10.9 ft³</p> <p>Country of origin: US</p> <p>Custom tariff no.: 8413.70.2040</p> |




Company name:  
Created by:  
Phone:

Date: 07/02/2023


99918024 CRN 32-1-1 A-G-A-V-HQQV 60 Hz

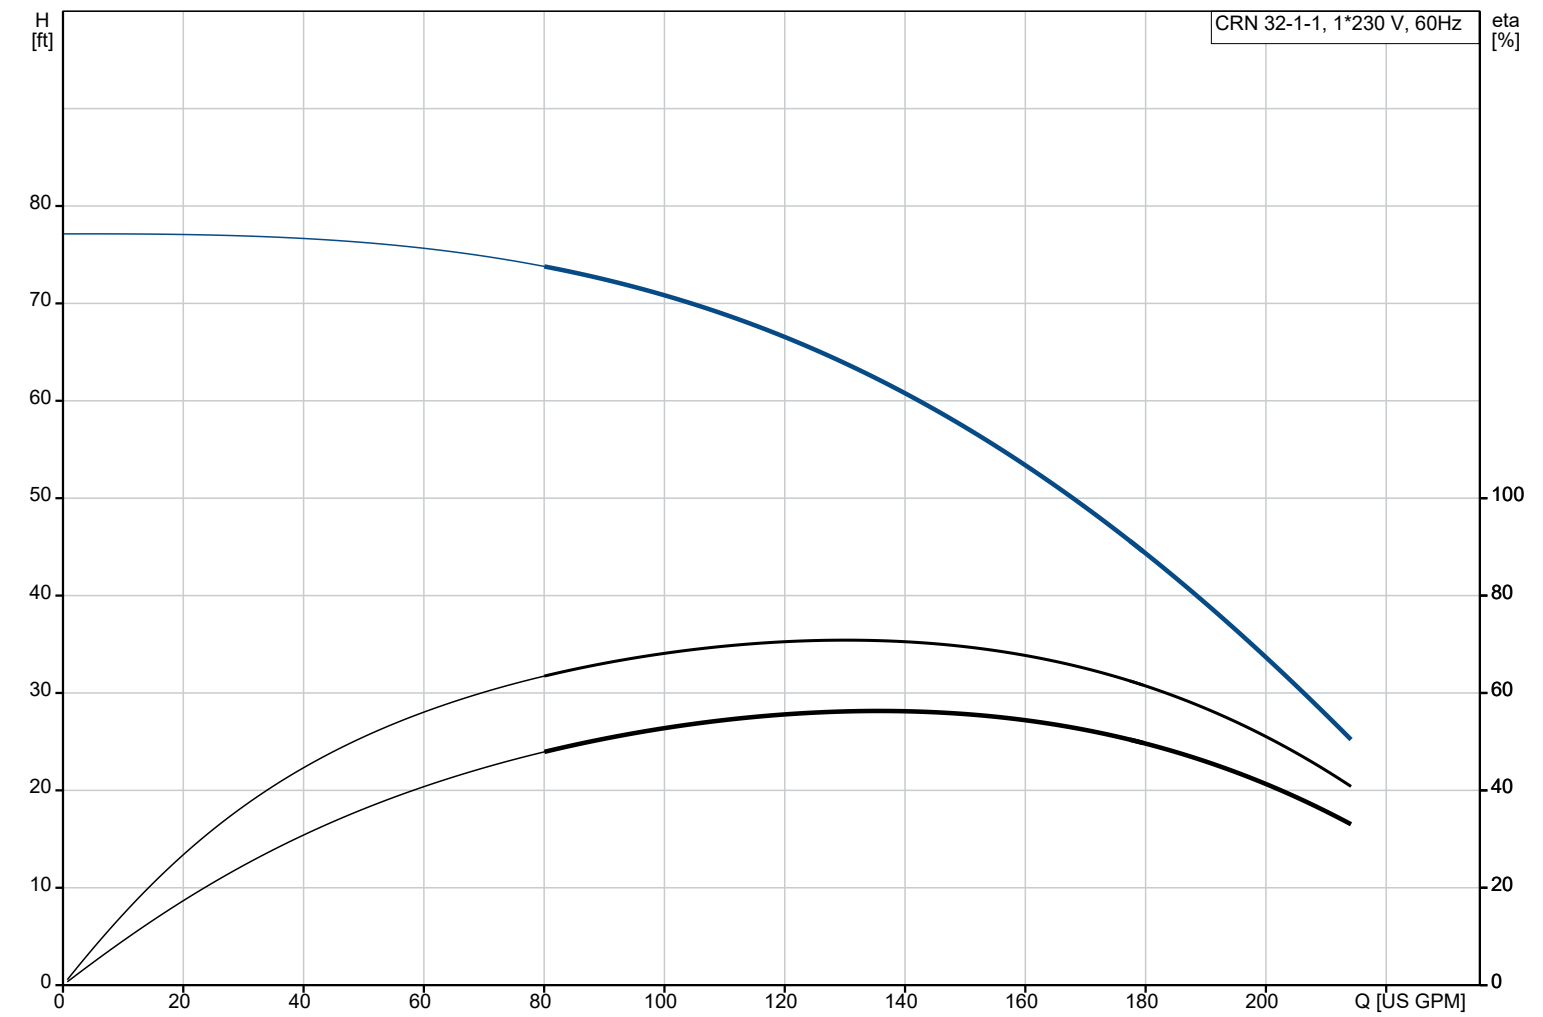





Pumped liquid = Water  
Liquid temperature during operation = 68 °F  
Density = 62.29 lb/ft³

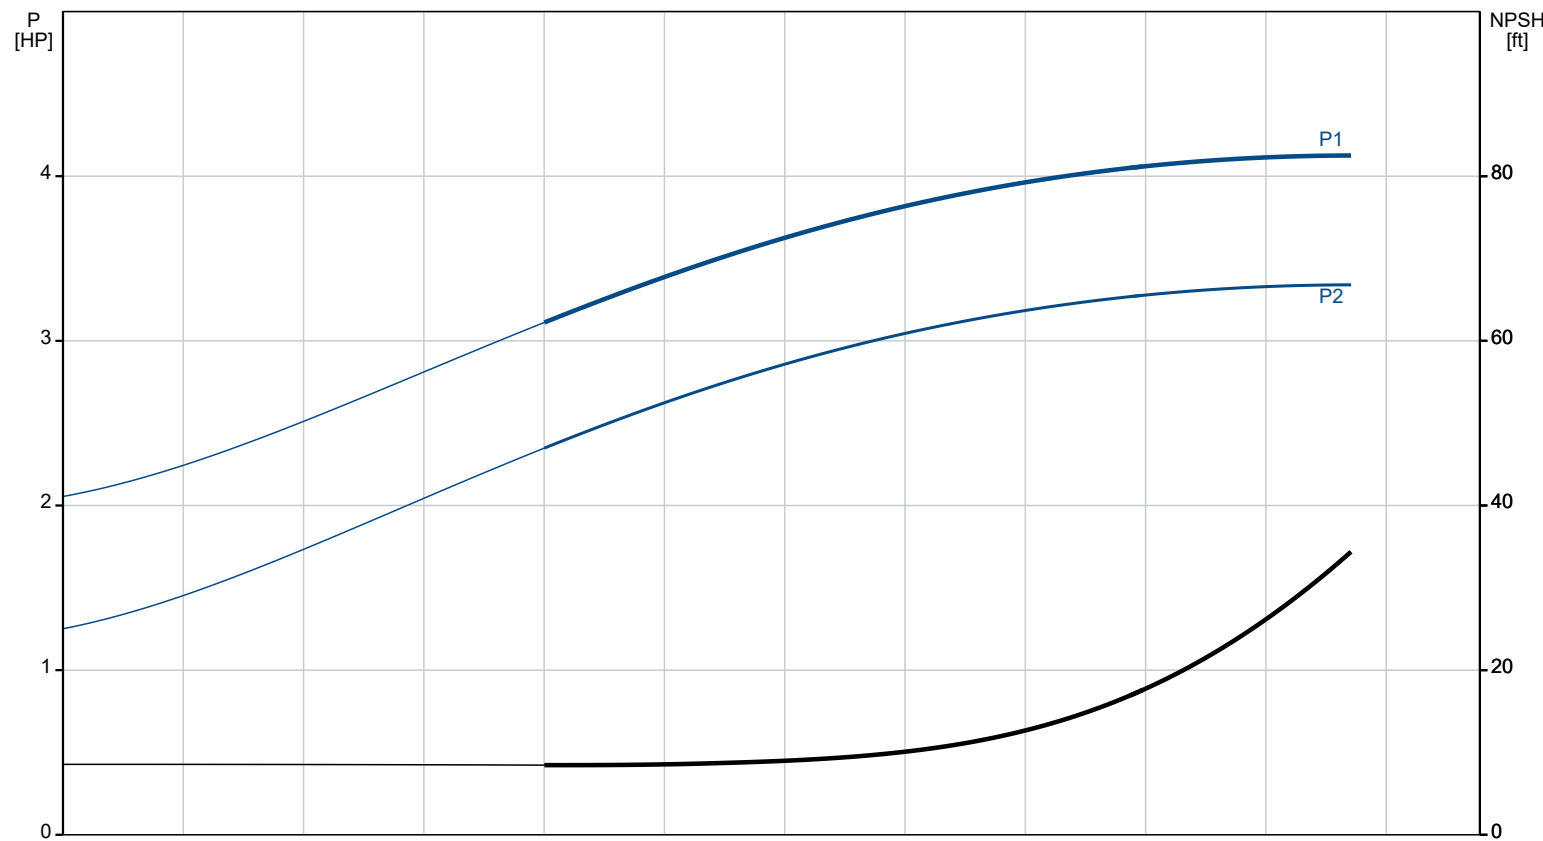

| Description                              | Value                   |
|------------------------------------------|-------------------------|
| <b>General information:</b>              |                         |
| Product name:                            | CRN 32-1-1 A-G-A-V-HQQV |
| Product No:                              | 99918024                |
| EAN number:                              | 5715114128766           |
| <b>Technical:</b>                        |                         |
| Pump speed on which pump data are based: | 3457 rpm                |
| Rated flow:                              | 159 US GPM              |
| Rated head:                              | 43.97 ft                |
| Maximum head:                            | 68.9 ft                 |
| Actual impeller diameter:                | 4.66 in                 |
| Stages:                                  | 1                       |
| Impellers:                               | 1                       |
| Number of reduced-diameter impellers:    | 1                       |
| Low NPSH:                                | N                       |
| Pump orientation:                        | Vertical                |
| Shaft seal arrangement:                  | Single                  |
| Code for shaft seal:                     | HQQV                    |
| Approvals:                               | CURUS                   |
| Curve tolerance:                         | ISO9906:2012 3B         |
| Pump version:                            | A                       |
| Model:                                   | B                       |
| Cooling:                                 | IC 411                  |
| <b>Materials:</b>                        |                         |
| Base:                                    | Stainless steel         |
| Base:                                    | EN 1.4408               |
| Base:                                    | AISI 316                |
| Impeller:                                | Stainless steel         |
| Impeller:                                | EN 1.4401               |
| Impeller:                                | AISI 316                |
| Material code:                           | A                       |
| Code for rubber:                         | V                       |
| Bearing:                                 | SIC                     |
| Support bearing:                         | Graflon                 |
| <b>Installation:</b>                     |                         |
| t max amb:                               | 104 °F                  |
| Maximum operating pressure:              | 232.06 psi              |
| Max pressure at stated temp:             | 232 psi / 194 °F        |
| Max pressure at stated temp:             | 232 psi / -4 °F         |
| Type of connection:                      | ANSI                    |
| Size of inlet connection:                | 2 1/2 inch              |
| Size of outlet connection:               | 2 1/2 inch              |
| Pressure rating for connection:          | PN 16                   |
| Flange rating inlet:                     | 150 lb                  |
| Flange size for motor:                   | 182TC                   |
| Connect code:                            | G                       |
| <b>Liquid:</b>                           |                         |
| Pumped liquid:                           | Water                   |
| Liquid temperature range:                | -4 .. 194 °F            |
| Selected liquid temperature:             | 68 °F                   |
| Density:                                 | 62.29 lb/ft³            |
| <b>Electrical data:</b>                  |                         |
| Motor standard:                          | NEMA                    |
| Motor type:                              | WEG                     |
| Rated power - P2:                        | 5 HP                    |
| Power (P2) required by pump:             | 5 HP                    |
| Mains frequency:                         | 60 Hz                   |
| Rated voltage:                           | 1 x 208-230 V           |
| Service factor:                          | 1.15                    |
| Rated current:                           | 31.7-25.3 A             |
| Starting current:                        | 800-800 %               |
| Full load SF current:                    | 31.7/22.4 A             |
| Cos phi - power factor:                  | 0.98                    |
| Rated speed:                             | 3515 rpm                |
| IE efficiency:                           | 84.0 %                  |
| Motor efficiency at full load:           | 84.0 %                  |

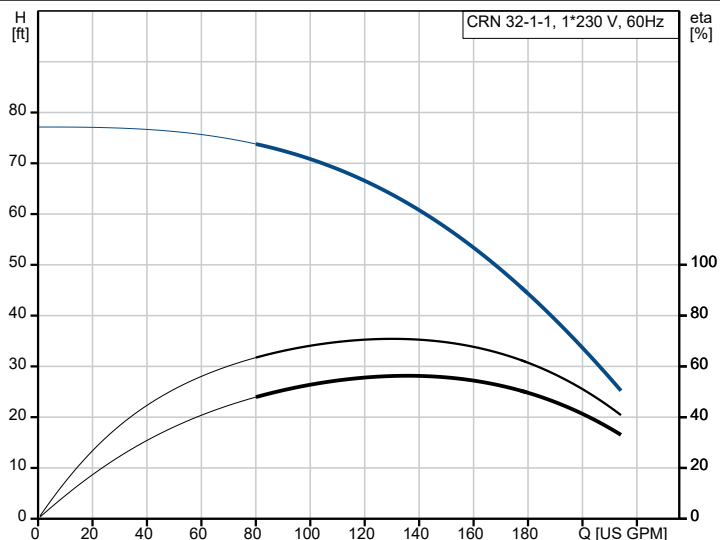

Pumped liquid = Water  
Liquid temperature during operation = 68 °F  
Density = 62.29 lb/ft³

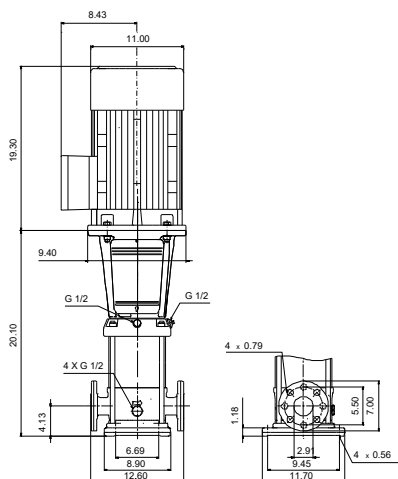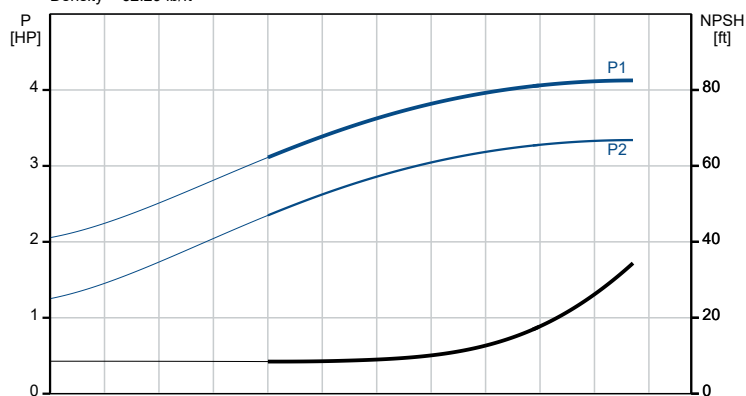



Company name:  
Created by:  
Phone:

Date: 07/02/2023


| Description                   | Value        |
|-------------------------------|--------------|
| Motor efficiency at 3/4 load: | 82.0 %       |
| Motor efficiency at 1/2 load: | 76.4 %       |
| Number of poles:              | 2            |
| Enclosure class (IEC 34-5):   | IP55         |
| Insulation class (IEC 85):    | F            |
| Built-in motor protection:    | PTO          |
| Motor No:                     | 99883304     |
| <b>Controls:</b>              |              |
| Frequency converter:          | NONE         |
| <b>Others:</b>                |              |
| DOE Pump Energy Index CL:     | 0.87         |
| Net weight:                   | 247 lb       |
| Gross weight:                 | 265 lb       |
| Shipping volume:              | 10.9 ft³     |
| Country of origin:            | US           |
| Custom tariff no.:            | 8413.70.2040 |



Company name:  
Created by:  
Phone:

Date: 07/02/2023

99918024 CRN 32-1-1 A-G-A-V-HQQV 60 Hz

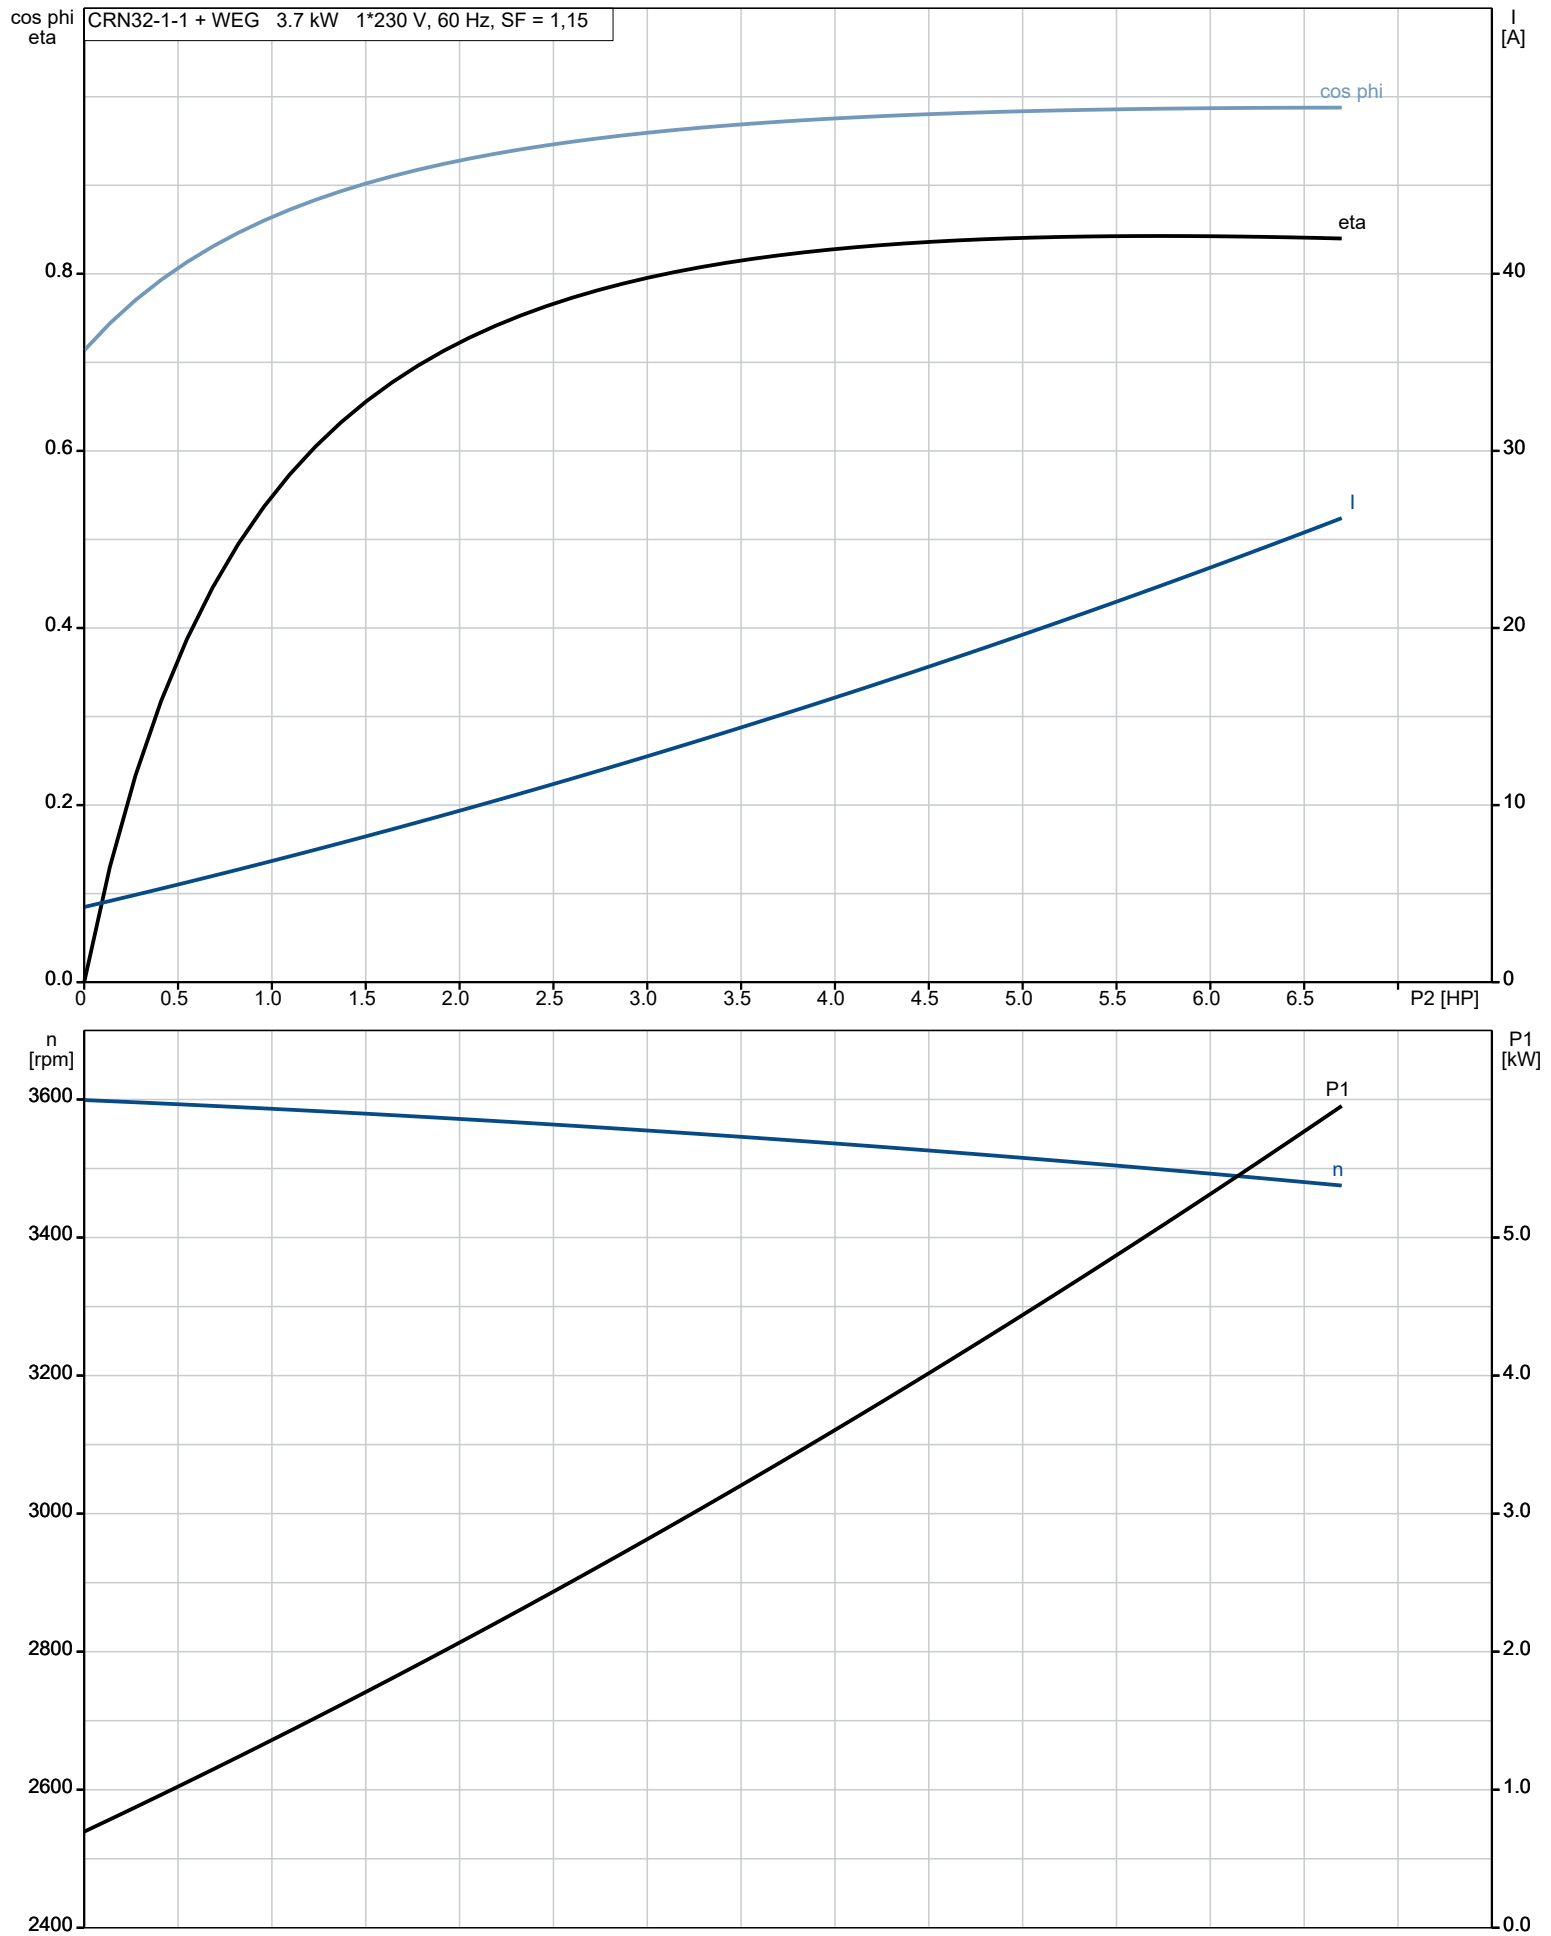

## 99918024 CRN 32-1-1 A-G-A-V-HQQV 60 Hz

