

Submittal Data

PROJECT:	UNIT TAG:	QUANTITY:
REPRESENTATIVE:	TYPE OF SERVICE:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:
	ORDER NO.:	DATE:




CUE 3X380-500V IP66 55KW DC


CUE

Note! Product picture may differ from actual product

Conditions of Service	Pump Data	Motor Data
	<div>Maximum ambient temperature:113 °F</div> <div>Approvals:CE, CULUS, C-TICK</div> <div>Product number:99619051</div>	<div>Mains frequency:50 / 60 Hz</div> <div>Enclosure class:IP66</div> <div>Motor protection:YES</div> <div>Thermal protection:external</div>

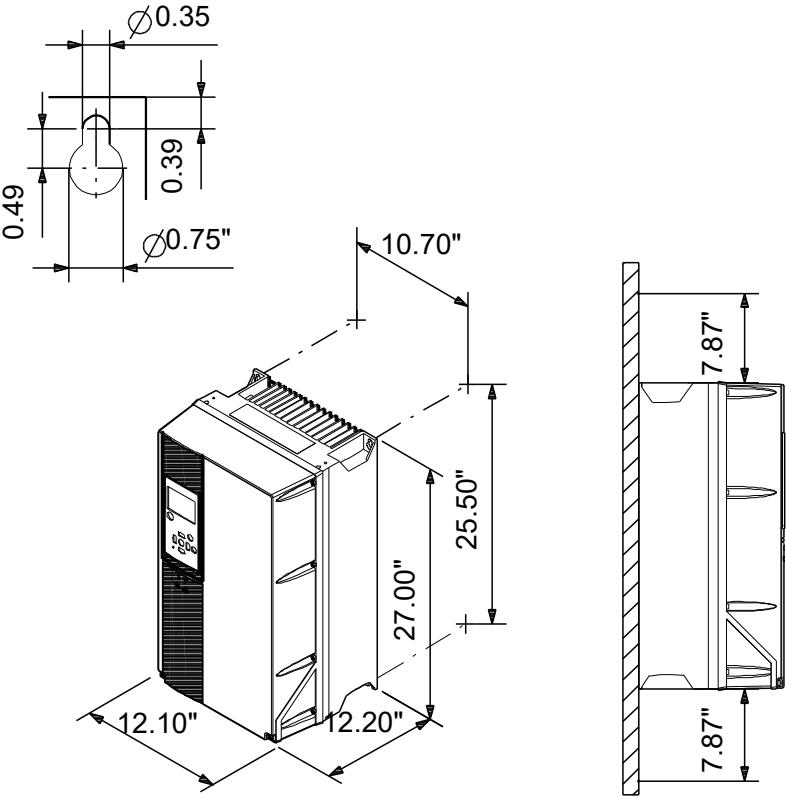

**Materials:**

Qty.	Description
1	<p><b>CUE 3X380-500V IP66 55KW DC</b></p>  <p>Note! Product picture may differ from actual product</p> <p>Product No.: <a href="#">99619051</a></p> <p>CUE is a complete range of external frequency converters designed for speed control of a wide range of Grundfos pumps. CUE has a built-in PI controller and offers the same functionality and user-interface as Grundfos E-pumps. CUE solutions can thus be seen as an extension to the E-pump range.</p> <p>By choosing a CUE-solution, you will get the following benefits:</p> <ul style="list-style-type: none"> <li>- Grundfos E-pump functionality and user-interface</li> <li>- application- and pump-family-related functions</li> <li>- increased comfort compared to fixed-speed pumps</li> <li>- very easy installation and commissioning compared to standard frequency converters</li> <li>- speed control of pumps up to 250 kW</li> <li>- speed control of pumps installed in potentially explosive environments.</li> </ul> <p>CUE offers the following inputs and output:</p> <ul style="list-style-type: none"> <li>- RS-485 GENIbus</li> <li>- an analog 0-10 V input for external setpoint</li> <li>- an analog 0/4-20 mA input for sensor</li> <li>- four digital inputs for various functions, for instance external start/stop</li> <li>- two signal relays (C/NO/NC).</li> </ul> <p>Accessories:</p> <p>Input/output add-on board</p> <p>Provides additional input:</p> <ul style="list-style-type: none"> <li>- one 0/4-20 mA analog input for an additional sensor</li> <li>- one 0-20 mA analog output</li> <li>- two inputs for Pt100/Pt1000 temperature sensors, for instance for bearing monitoring.</li> </ul> <p>Motor filters:</p> <p>For reduction of dU/dt and peak voltages to the motor windings and for reduction of the acoustic noise generated in the motor, a number of motor filters are offered:</p> <ul style="list-style-type: none"> <li>- dU/dt filters , 11-250 kW</li> <li>- Sine wave filters, 0.55-250 kW.</li> </ul> <p>Technical:</p> <p>Approvals: CE, CULUS, C-TICK</p> <p>Installation:</p> <p>Range of ambient temperature: 32 .. 113 °F</p> <p>Relative humidity: 5-95 %</p> <p>Electrical data:</p> <p>Rated power - P2: 75 HP</p> <p>Mains frequency: 50 / 60 Hz</p> <p>Rated voltage: 3 x 380-440/441-500 V</p> <p>Rated current: 106-105 A</p> <p>Maximum current consumption: 106 A</p> <p>Efficiency at full load: 98 %</p> <p>Enclosure class (IEC 34-5): IP66</p> <p>Others:</p>



Company name: Specs

Created by:



Phone:

Date:


29/11/2023

Qty.	Description
1	<div>Net weight: 99.2 lb</div> <div>Gross weight: 99.7 lb</div> <div>Country of origin: US</div> <div>Custom tariff no.: 8413.91.9096</div>

Description	Value
<b>General information:</b>	
Product name:	CUE 3X380-500V IP66 55KW DC
Product No:	99619051
EAN number:	5713832013630
<b>Technical:</b>	
Approvals:	CE, CULUS, C-TICK
<b>Installation:</b>	
Range of ambient temperature:	32 .. 113 °F
Relative humidity:	5-95 %
Mounted on:	WALL
<b>Electrical data:</b>	
Rated power - P2:	75 HP
Mains frequency:	50 / 60 Hz
Rated voltage:	3 x 380-440/441-500 V
Rated current:	106-105 A
Maximum current consumption:	106 A
Efficiency at full load:	98 %
Enclosure class (IEC 34-5):	IP66
Built-in motor protection:	YES
Thermal protec:	external
Cable length:	150/300 m
<b>Others:</b>	
Net weight:	99.2 lb
Gross weight:	99.7 lb
Country of origin:	US
Custom tariff no.:	8413.91.9096

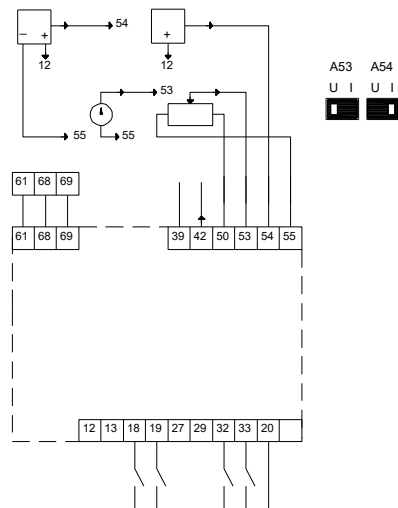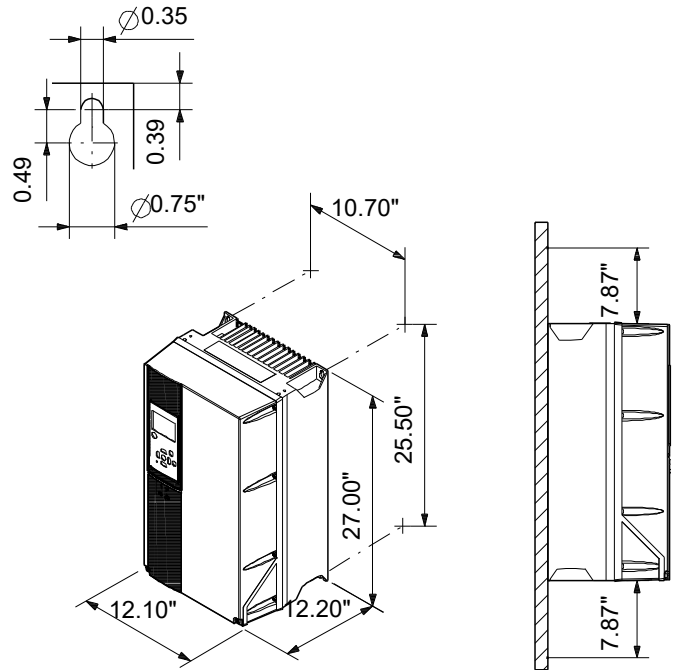

## 99619051 CUE 3X380-500V IP66 55KW DC

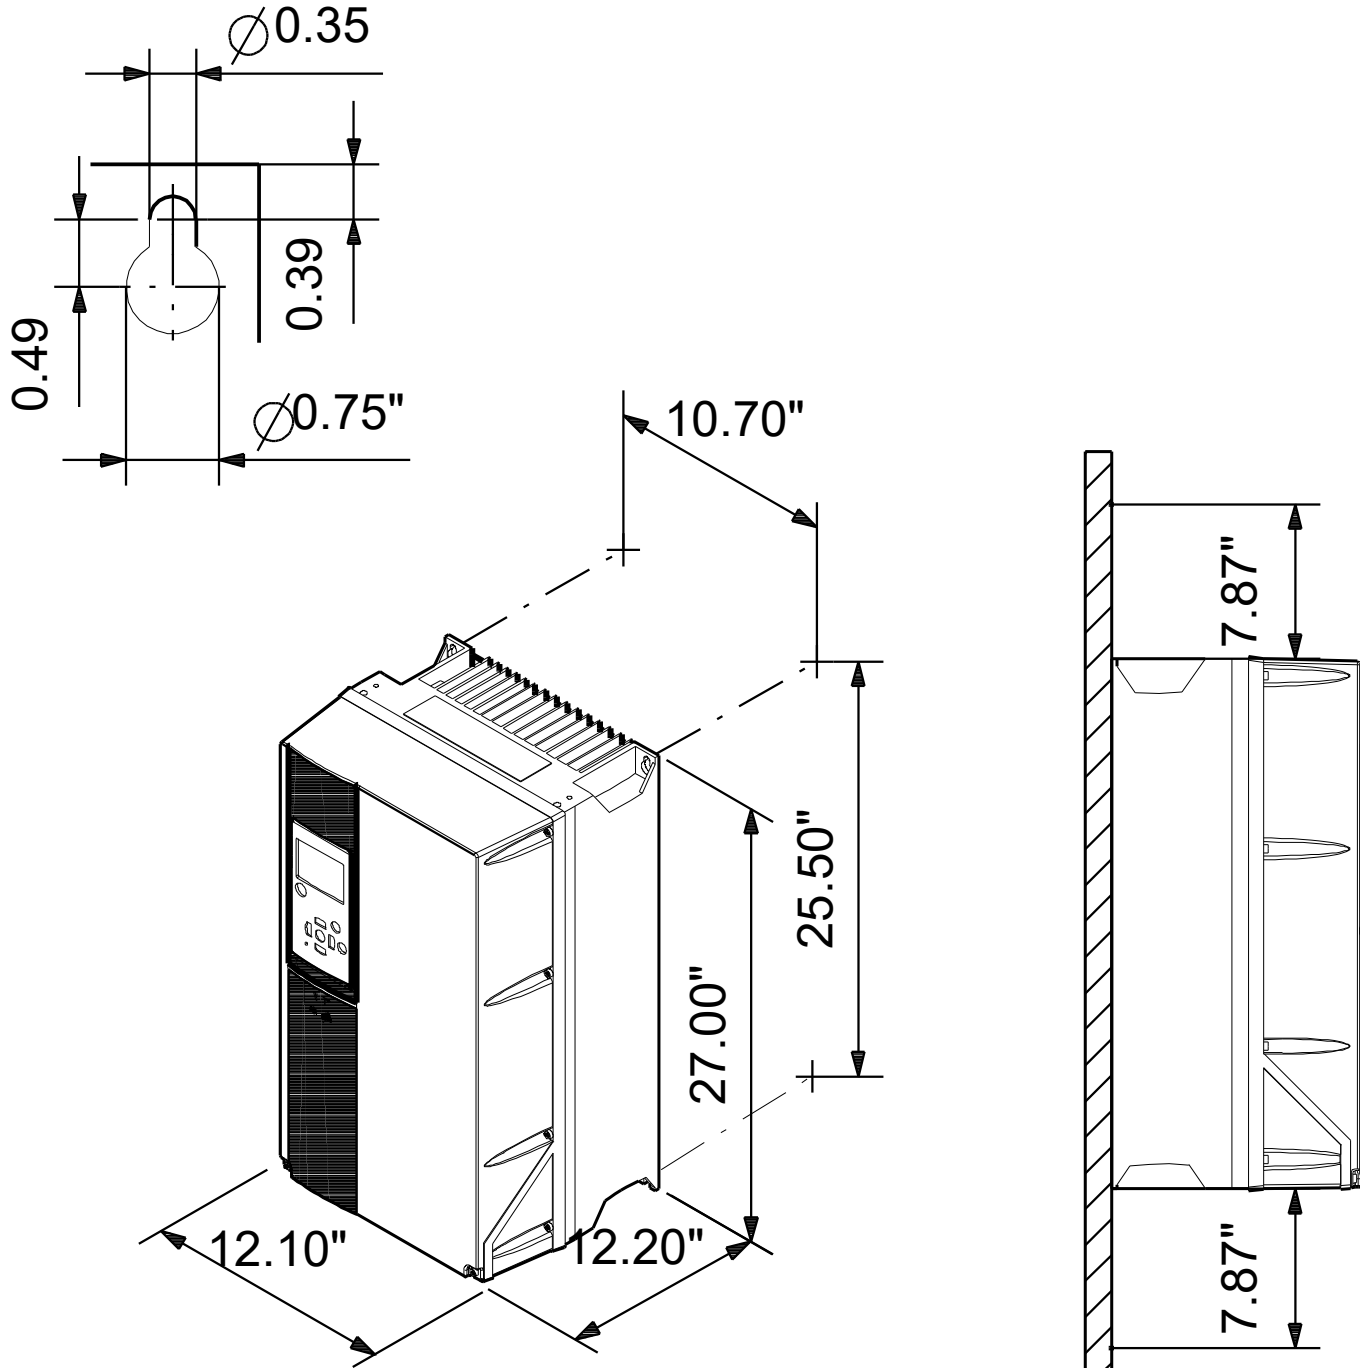

## 99619051 CUE 3X380-500V IP66 55KW DC

